



## DFE 30

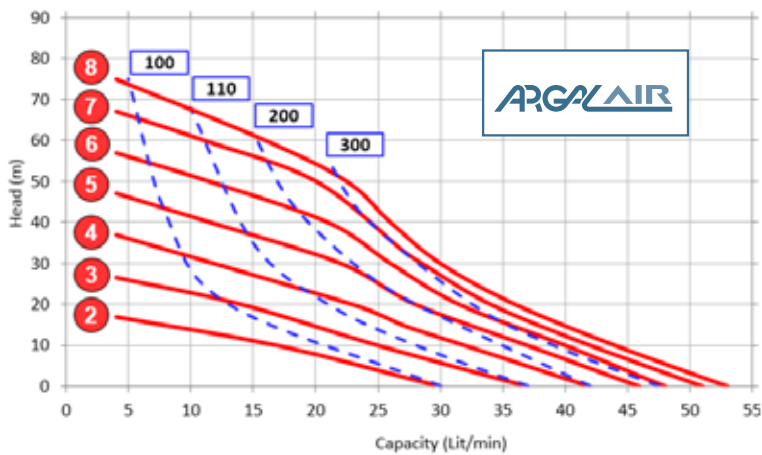

**bar** Air Pressure main supply      **NI/min** Air consumption




DIMENSIONS (mm)	
AISI 316L	A 203 B 106 C 197

TECHNICAL DATA	
Fluid connections	• Tri-Clamp 1" • BSP • NPT
Air connection	6 mm
Max flow rate	52 l/m'
Max air pressure	8 bar
Displacement per cycle	70


COMPOSITION	
Wetted parts	• AISI 316L Polished
Diaphragms	• KEYFLEX+PTFE
Valve Balls	• PTFE • AISI 316
Valve Seats	• AISI 316 • UPPE
Gaskets	• PTFE

Connections scheme page 15

## DFE 60

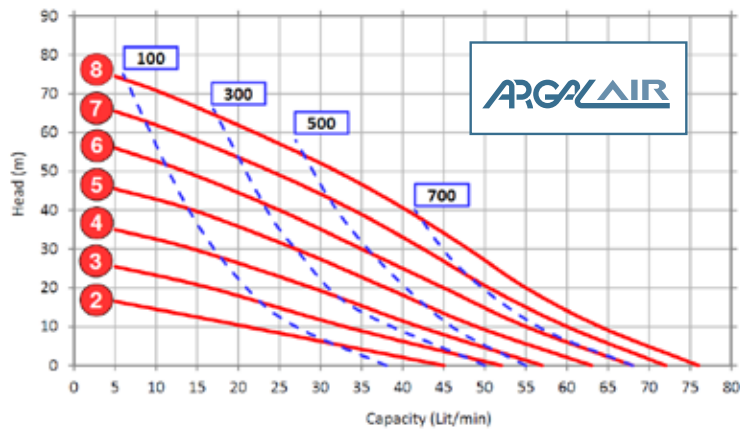

**bar** Air Pressure main supply      **NI/min** Air consumption



DIMENSIONS (mm)	
AISI 316L	A 247 B 160 C 253

TECHNICAL DATA	
Fluid connections	• Tri-Clamp 1" • BSP • NPT
Air connection	¼" BSP • NPT*
Max flow rate	76 l/m
Max air pressure	8 bar
Displacement per cycle	60

COMPOSITION	
Wetted parts	• AISI 316L Polished
Diaphragms	• KEYFLEX+PTFE
Valve Balls	• PTFE • AISI 316
Valve Seats	• AISI 316 • UPPE
Gaskets	• PTFE

Connections scheme page 15