



DFE 100

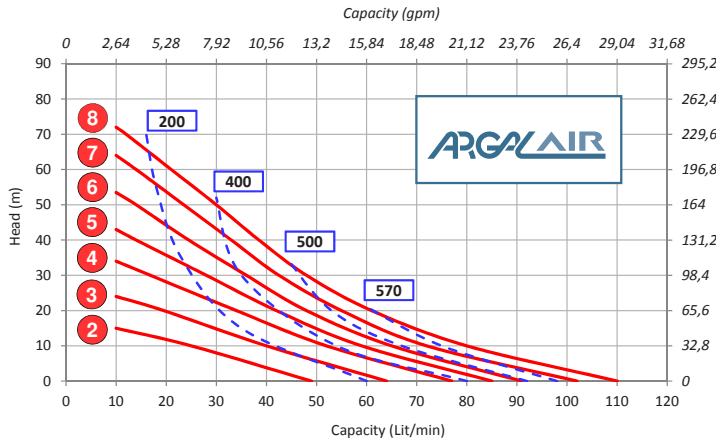

bar Air Pressure main supply **NI/min** Air consumption



DIMENSIONS (mm)	
AISI 316L	A 273 B 170 C 288


TECHNICAL DATA	
Fluid connections	• Tri-Clamp 1" 1/2 • BSP*
Air connection	3/8" BSP • NPT*
Max flow rate	130 l/m'
Max air pressure	8 bar
Displacement per cycle	240

COMPOSITION	
Wetted parts	• AISI 316L Polished
Diaphragms	• KEYFLEX+PTFE
Valve Balls	• PTFE • AISI 316
Valve Seats	• AISI 316 • UPPE
Gaskets	• PTFE


Connections scheme page 15

* Optional

DFE 160

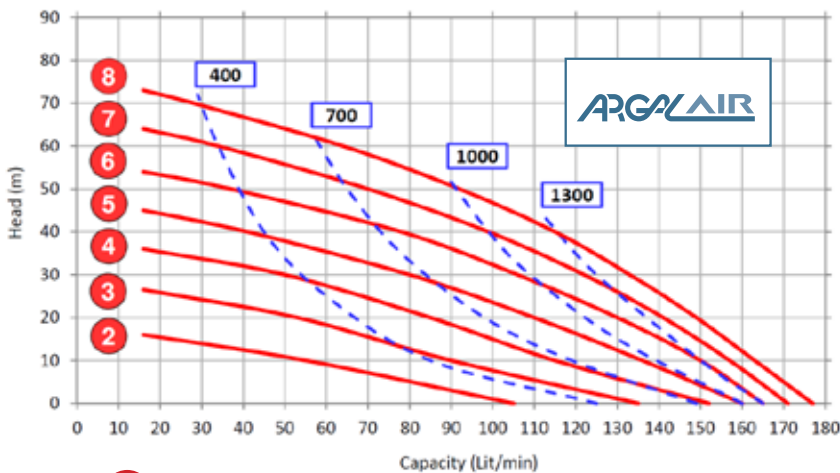

bar Air Pressure main supply **NI/min** Air consumption



DIMENSIONS (mm)	
AISI 316L	A 310 B 203 C 322

TECHNICAL DATA	
Fluid connections	• Tri-Clamp 1" 1/2 • BSP*
Air connection	3/8" BSP • NPT*
Max flow rate	175 l/m'
Max air pressure	8 bar
Displacement per cycle	440

COMPOSITION	
Wetted parts	• AISI 316L Polished
Diaphragms	• KEYFLEX+PTFE
Valve Balls	• PTFE • AISI 316
Valve Seats	• AISI 316 • UPPE
Gaskets	• PTFE

Connections scheme page 15

* Optional