



Affordable Balance to Achieve Reliable Results

The Pioneer PX combines essential weighing functionality with competitive performance, offering high accuracy and repeatability for applications in laboratory, industrial and education settings. The PX is affordably priced, intuitively designed for intelligent operation with a second line display for additional information, and USB and RS-232 connectivity for easy communication.

Unique Features:

- The PX offers high accuracy and repeatability for essential weighing applications in laboratory, industrial and education settings at an economical price point.
- Featuring a cast metal lower housing, sub-pan and stainless steel weighing pan, the PX is durably constructed for versatile, long-term use.
- Pioneer features a second line display for additional information or guidance, a static removal bar for convenient grounding, and USB connectivity.

PIONEER™ *Semi-Micro, Analytical and Precision Balances*

GLP/GMP and Password Protection

A real-time clock (RTC) keeps accurate time, even during power loss. GLP/GMP data output capability allows for sample name, project, user and balance IDs to be recorded, helping to meet traceability and compliance requirements.

Password protection reduces the potential risk of accidental or unauthorized changes in balance settings such as date and time, external calibration, print settings etc.



Multiple Application Modes

The PX features six standard modes including Weighing, Parts Counting, Percent Weighing, Dynamic Weighing, Density Determination and Formulation.

Equipped with USB and RS232 connectivity ports, the PX allows for easy communication with a PC, impact printer or a Zebra label printer.



Power Saving Functions

The PX features power saving functions that makes it environmentally friendly. The auto-off and other brightness setup will save the electricity when the balance is not used.




PIONEER™ Semi-Micro, Analytical and Precision Balances

Durably constructed of cast metal lower housing, metal sub-pan and stainless steel weighing pan for long-term use.

A static removal bar (constructed of permanent static electric dissipative ABS) provides a convenient grounding location.

RS-232 and USB device ports allow for easy connectivity to PCs and PLCs. Equipped with a security lock to prevent unauthorized use.

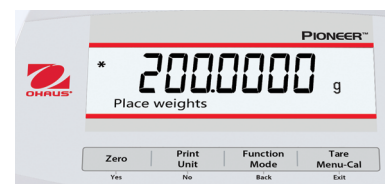

Large viewing angle with bright backlit LCD display.

2 line display provides additional information or guidance prompts to the user.


Four quick keys enable easy operation of multiple weighing modes.

InCal™ Model	PX125D**	PX85**	PX225D**	PX84	PX124	PX224	PX163	PX223	PX323	PX423	PX523	PX623
ExCal Model	-			PX84/E	PX124/E	PX224/E	PX163/E	PX223/E	PX323/E	PX423/E	PX523/E	PX623/E
Capacity (g)	52/120	82	82/220	82	120	220	160	220	320	420	520	620
Readability d, fine range	0.01mg							-				
Readability d, full range	0.1mg	0.01mg	0.1mg	0.1mg					0.001g			
Repeatability (sd.), ≤5% of full load	0.01mg			0.08mg					0.0008g			
Repeatability (sd.), 5% of full load to fine range max	0.02mg							-				
Repeatability (sd.), fine range max to full range	0.1mg	0.02mg	0.1mg	0.1mg					0.001g			
Linearity deviation, typical	± 0.06mg			± 0.06mg					± 0.0006g			
Linearity deviation	± 0.1mg			± 0.2mg					± 0.002g			
Stabilization Time (s)	10			2					1.5			
Sensitivity Temperature Drift (PPM/K)				± 2						± 3		
Min-Weight (typical) (USP, K=2, U=0.10%)	20 mg			0.16 g					1.6 g			
Min-Weight (optimal) (USP, K=2, U=0.10%, SRP≤0.41d)*	8.2 mg			0.082 g					0.82 g			
Units	Milligram, Gram, Kilogram, Ounce, Pound, Carat, Pennyweight, Ounce Troy, Grain, Newton, Hong Kong Tael, Singapore Tael, Taiwan Tael, Momme, Tical (MM), Mesghal, Tola (India), Baht, 1 Custom unit											
Assembled Dimensions (W × D × H)	209 × 321 × 309 mm											
Applications	Basic Weighing, Parts Counting, Percent Weighing, Animal Weighing, Density Determination, Formulation											
Pan Size (Ø)	80 mm			90 mm					120 mm			
Power Supply	Power Input: 100 – 240V ~ 200mA 50 – 60Hz 12 – 18VA Power Output: 12 VDC 0.5A											
Communication	RS232 and USB											
Operating Temperature Range	Operating conditions for ordinary lab application: +10°C to 30°C (operability guaranteed between +5°C and 40°C).											
Net Weight				4.5 kg								
Shipping Weight				7 kg								
Shipping Dimensions (W × D × H)	507 × 387 × 531 mm											

*The value for SRP is the standard deviation for n replicate weighings (n≥10) **Automatic Calibration models

PIONEER™ *Semi-Micro, Analytical and Precision Balances*

RS-232 and USB device ports allow for easy connectivity to PCs and PLCs. Equipped with a security lock to prevent unauthorized use.

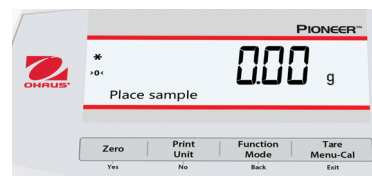

Large viewing angle with bright backlit LCD display.

2 line display provides additional information or guidance prompts to the user.

Four quick keys enable easy operation of multiple weighing modes.




PX12001 and PX12001/E model

InCal™ Model	PX822	PX1602	PX2202	PX3202	PX4202	PX5202	PX6202	PX2201	PX4201	-	PX12001	
ExCal Model	PX822/E	PX1602/E	PX2202/E	PX3202/E	PX4202/E	PX5202/E	PX6202/E	PX2201/E	PX4201/E	PX6201/E	PX8201/E	PX12001/E
Capacity (g)	820	1,600	2,200	3,200	4,200	5,200	6,200	2,200	4,200	6,200	8,200	12,000
Readability (g)	0.01							0.1				
Repeatability (sd.), ≤5% of full load (g)	0.008							0.08				
Repeatability (sd.), 5% of full load to full range (g)	0.01							0.1				
Linearity deviation, typical (g)	± 0.006							± 0.06				
Linearity deviation (g)	± 0.02							± 0.2				
Stabilization Time (s)	1											
Sensitivity Temperature Drift (PPM/K)	± 3							± 5				
Typical Minimum Weight USP (g), (USP K=2, U=0,10%)	16 g							160 g				
Optimized Minimum Weight (USP, U=0,10%, K=2) SRP≤0,41d*	8.2 g							82 g				
Units	Milligram, Gram, Kilogram, Ounce, Pound, Carat, Pennyweight, Ounce Troy, Grain, Newton, Hong Kong Tael, Singapore Tael, Taiwan Tael, Momme, Tical (MM), Mesghal, Tola (India), Baht, 1 Custom unit											
Applications	Basic Weighing, Parts Counting, Percent Weighing, Animal Weighing, Density Determination, Formulation											
Pan Size (Ø)	180 mm										193 x 248mm	
Power Supply	Power Input: 100 – 240V ~ 200mA 50 – 60Hz 12 – 18VA Power Output: 12 VDC 0,5A											
Assembled Dimensions (W x D x H)	209 x 321 x 98 mm										209 x 321 x 101 mm	
Communication	RS232 and USB											
Operating Temperature Range	Operating conditions for ordinary lab application: +10°C to 30°C (operability guaranteed between +5°C and 40°C).											
Net Weight	3.5 kg											
Shipping Weight	5 kg											
Shipping Dimensions (W x D x H)	550 x 385 x 291 mm											

*The value for SRP is the standard deviation for n replicate weighings (n≥10)

PIONEER™ *Semi-Micro, Analytical and Precision Balances*

Outline Dimensions

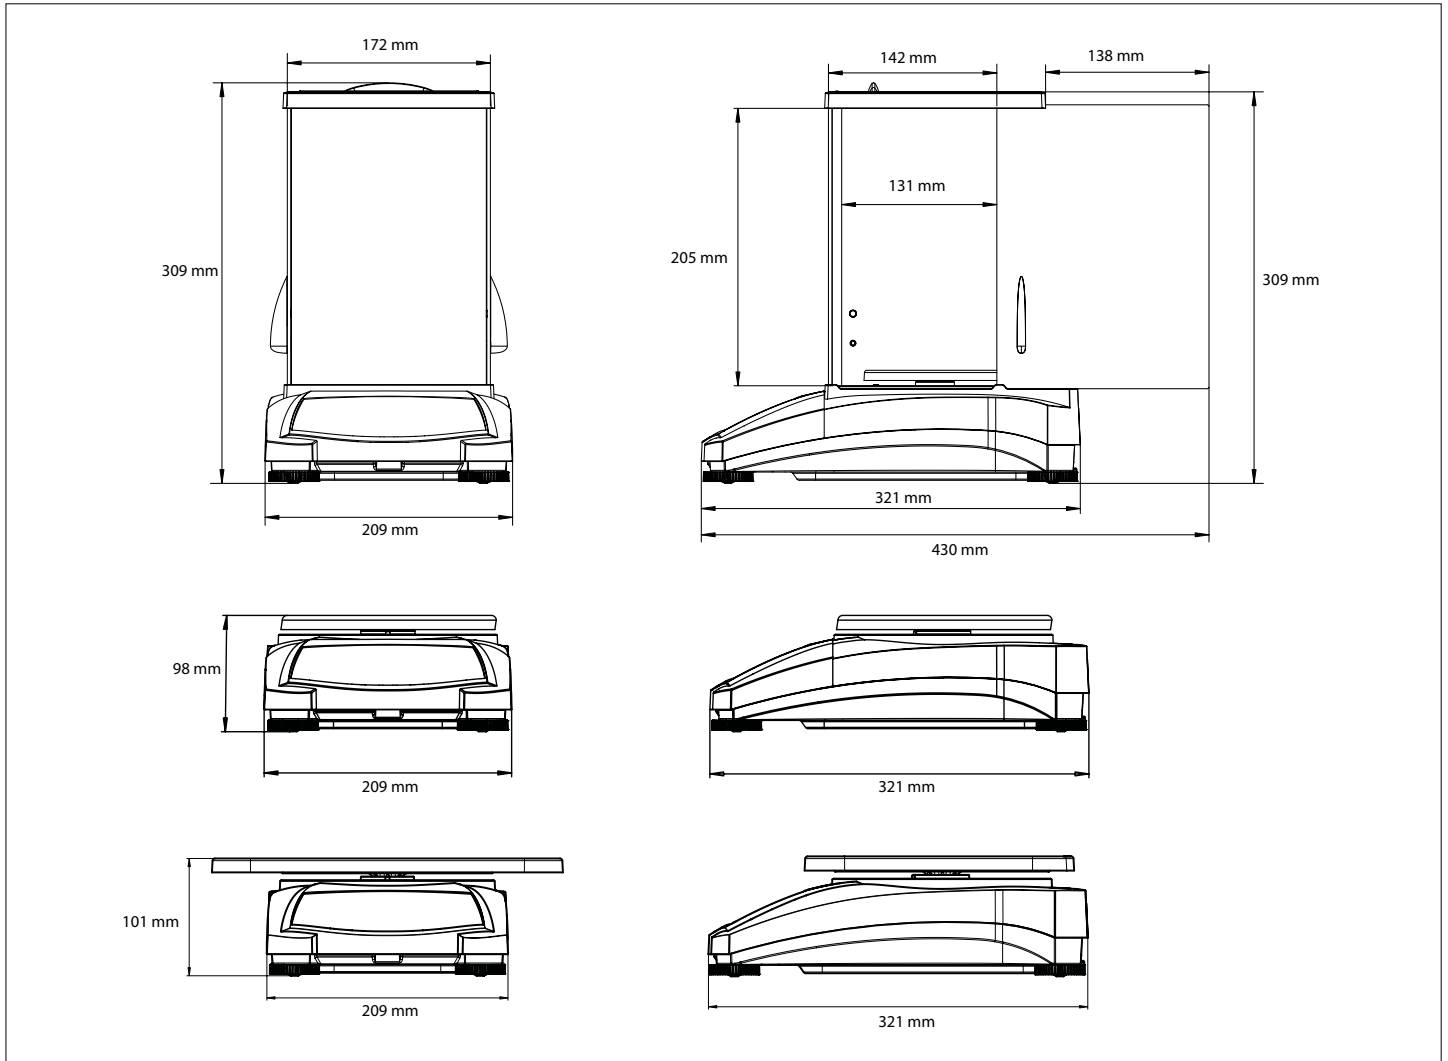

Other Standard Features and Equipment

Metal base, plastic top housing, removable stainless steel pan, removable glass draftshield or side doors, Real Time Clock with GLP/GMP Data, integrated weigh-below-hook, security bracket, calibration lock and in-use cover, user-selectable environmental filters and brightness settings, auto-tare, auto-dim, user-selectable span calibration points, overload indicator, software lockout and reset menu, user-selectable communication settings and data print options, user-definable project and user IDs, software overload/underload indicator, stability indicator, 11 operating languages

Compliance

- **Product Safety:** IEC/EN 61010-1; CAN/CSA C22.2 61010-1; UL 61010-1
- **Electromagnetic Compatibility:** IEC/EN 61326-1 Class B, Basic Environments; FCC Part 15 Class A; Canada ICES-003 Class A
- **Compliance Marks:** CE; CSA; RCM

Accessories

Auxiliary Display	30472064
Density Kit for Solids	80253384
Sinker Glass for Density Determination	83034024
USB Interface Cable	83021085
Security Device	80850043
RS232 Cable (25-pin)	80500524
RS232 Cable (9-pin)	80500525
Dust Cover	30093334
In-use Cover	30372546
Power Adapter for Balance	46001724
ION-100A	30130303
PX Full Housing In-Use Cover for 0.01g and 0.1g Model	30759721
ACC. Pan 12kg 300X225 PX	30868077

OHAUS Asia/Pacific
Headquarters

e-mail: APmarketing@ohaus.com

Tel: +86 21 64855408

With offices throughout
Europe, Asia, and
Latin America

ISO 9001:2015

Registered Quality
Management System



80775276_P 20250807 © Copyright OHAUS Corporation