


VITLAB® continuous E/RS

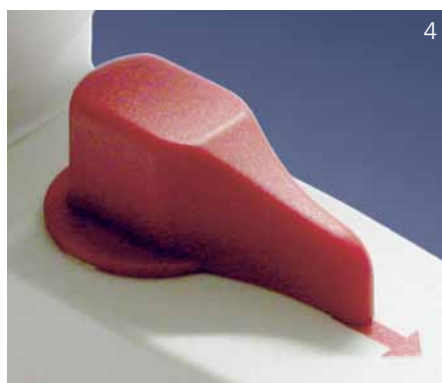

Chemical volumetric analysis with small and the most minute liquid volumes requires substantial concentration. The VITLAB® continuous bottle-top burette (Figure 1) enables continuous titration, which leads to rapid, convenient, and accurate results. The angled display shows 4-position titration volume in large, easily read numbers (Figure 2), which simplifies operation. Turning the two hand wheels supplies the titration medium in a continuous and pulse-free manner via the patented double-piston pump (EP 801 982) (Figure 3). Filling procedures are not necessary. This innovative technology increases safety; its compact design and low centre of gravity reduce risk of overturning, especially with smaller bottles. The height and length of the discharge tube can be adjusted, making it possible to work safely with both short and tall bottles. The patented recirculation system (EP 542 241) (Figure 4) prevents the loss of valuable reagent and reduces the risk of splashes. With its simple-to-use calibration function, VITLAB® continuous fulfils the corresponding requirements for test equipment monitoring without instrument downtime. Margins of error are under those specified in the DIN EN ISO 8655-3 standard, even for partial volumes. VITLAB® continuous is certified compliant with DIN 12600.

- Continuous supply of titration medium using a patented double-piston pump
- Continuous, precise control of the titration rate with large, easy-grip hand wheels
- Simple, medium-specific readjustment / calibration using the keypad
- Easily readable, large numbers
- Long operating life using two easily-replaced 1.5 V microbatteries
- No loss of medium thanks to a patented recirculation valve
- Freely rotatable 360° around the bottle for optimal orientation of the label
- Adjustable for various bottle sizes using the corresponding adapter.
- Telescopic discharge tube which can be adjusted in both height and length
- Adjustable telescopic discharge tube suitable for a variety of bottle heights

Included in delivery:

VITLAB® continuous E/RS, with GL 45 connecting threads and GL 32, GL 38 and S*40 (buttress thread) size PP thread adapters, telescopic filling tube (200 - 350 mm), telescopic discharge tube (140 - 220 mm), two 1.5 V microbatteries (LR 03/AAA), instruction manual, and quality certificate.

Type	Volume/rot.** ml	A* ≤ ± %	CV* ≤ %	PU	Cat. No.
E	2.5	0.2 at 25 ml	0.1 at 25 ml	1	1620506
RS	5.0	0.2 at 50 ml	0.1 at 50 ml	1	1620507

*Accuracy and coefficient of variation according to DIN EN ISO 8655-3

**Volume dispensed per rotation of the hand wheel

Volume measurement

Recommended range of use for VITLAB® continuous E/RS

The VITLAB® continuous E/RS bottle-top burette can be used for the following titrants up to a concentration of 1 mol/L:

Medium	Medium
Acetic acid	Potassium hydroxide
Ammonium iron (II) sulphate solution	Potassium iodate solution
Ammonium thiocyanate solution	Potassium permanganate solution
Barium chloride solution	Potassium thiocyanate solution
Bromide bromate solution	Silver nitrate solution
Cerium (IV) sulphate solution	Sodium arsenite solution
EDTA solution	Sodium carbonate solution
Hydrochloric acid	Sodium chloride solution
Iodine solution	Sodium hydroxide
Iron (II) sulphate solution	Sodium nitrite solution
Nitric acid	Sodium thiosulphate solution
Oxalic acid solution	Sulphuric acid
Perchloric acid	Tetra-n-butylammonium hydroxide solution
Potassium bromate solution	Zinc sulphate solution
Potassium bromide / bromate solution	
Potassium dichromate solution	

The recommendations in this table have been carefully tested and reflect the most current information available. Always follow the instruction manual for the instrument as well as the reagent manufacturer's specifications. Should you require information on chemicals not listed, please do not hesitate to contact us. As at 03/12.

Threaded bottles for VITLAB® continuous E/RS

Threaded brown glass (soda lime glass) bottles with an ethylene acrylate coating for increased safety, and a screw cap. The plastic coating significantly reduces the hazardous glass splintering during breakage. The maximum working temperature for coated bottles is 80 °C. To preserve the coating, do not clean at temperatures exceeding 60 °C.

Volume ml	Thread GL	Shape	PU	Cat. No.
1000	45	square	1	1671500
2500	45	round	1	1671510

