


RIGBOSS™ SERIES - Bulk Material Transfer Hose

DRILL WATER - BRINE


A220 Hard Wall 20 Bar / 300 psi

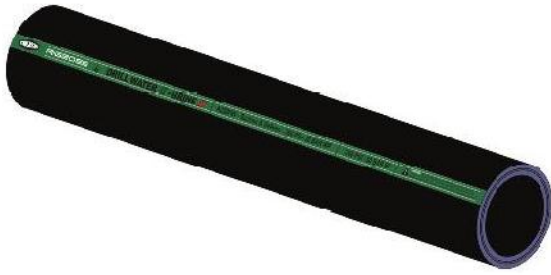

Application:	Rugged but flexible hard wall hose designed for transfer of sea water, grey water and brine. Hose features 5,000kg end pull resistance.
Tube:	Black CR Rubber
Cover:	Black IR/BR Blend; Abrasion, Ozone Resistant
Reinforcement:	High Tensile Textile Cords with Embedded Steel Wire Helix Wire
Temperature:	-20°C to 80°C

Part No.	ID (mm)	OD (mm)	WP (psi)	BP (psi)	Application	End Pull Resistance kg
A220HW080	76	97	300	1200	Suction/Delivery	5,000
A220HW100	102	125	300	1200	Suction/Delivery	5,000
A220HW125	127	153	300	1200	Suction/Delivery	5,000


A220 Soft Wall 20 Bar / 300 psi

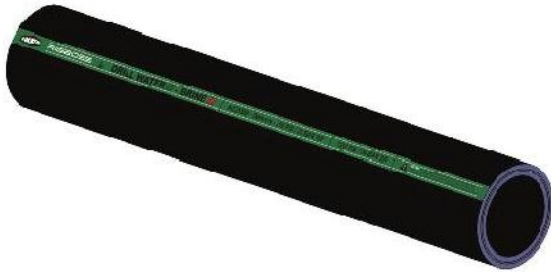

Application:	Rugged but flexible soft wall hose designed for transfer of sea water, grey water and brine. Hose features 5,000kg end pull resistance.
Tube:	Black CR Rubber
Cover:	Black IR/BR Blend; Abrasion, Ozone Resistant
Reinforcement:	High Tensile Textile Cords
Temperature:	-20°C to 80°C

Part No.	ID (mm)	OD (mm)	WP (psi)	BP (psi)	Application	End Pull Resistance kg
A220SW050	50	63	300	1200	Delivery	5,000
A220SW080	76	97	300	1200	Delivery	5,000
A220SW100	102	125	300	1200	Delivery	5,000
A200SW125	127	153	300	1200	Delivery	5,000


A227 Hard Wall 27 Bar / 400 psi

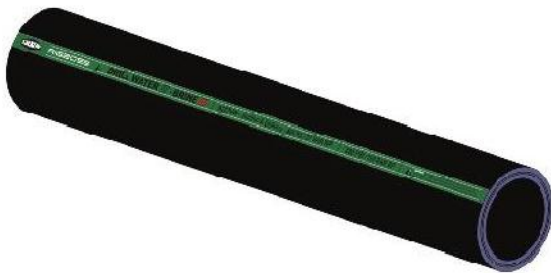

Application:	Heavy duty hard wall hose designed for transfer of sea water, grey water and brine where service demands higher operating pressures. Hose features 5,000kg end pull resistance.
Tube:	Black CR Rubber
Cover:	Black IR/BR Blend; Abrasion, Ozone Resistant
Reinforcement:	High Tensile Textile Cords with Embedded Steel Wire Helix Wire
Temperature:	-20°C to 80°C

Part No.	ID (mm)	OD (mm)	WP (psi)	BP (psi)	Application	End Pull Resistance kg
A227HW080	76	99	400	1600	Suction/Delivery	5,000
A227HW100	102	127	400	1600	Suction/Delivery	5,000
A227HW125	127	155	400	1600	Suction/Delivery	5,000

A227 Soft Wall 27 Bar / 400 psi

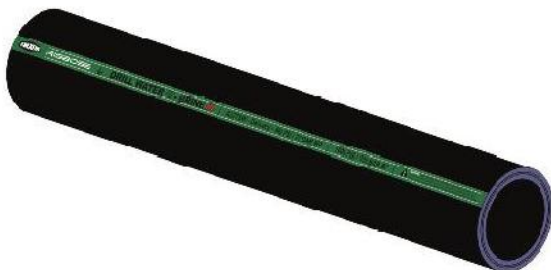

Application:	Heavy duty soft wall hose designed for transfer of sea water, grey water and brine where service demands higher operating pressures. Hose features 5,000kg end pull resistance.
Tube:	Black CR Rubber
Cover:	Black IR/BR Blend; Abrasion, Ozone Resistant
Reinforcement:	High Tensile Textile Cords
Temperature:	-20°C to 80°C

Part No.	ID (mm)	OD (mm)	WP (psi)	BP (psi)	Application	End Pull Resistance kg
A227SW080	76	98	400	1600	Delivery	5,000
A227SW100	102	126	400	1600	Delivery	5,000
A227SW125	127	154	400	1600	Delivery	5,000