

金工精密车床



AKS-XI1340GA
PRECISION GEAR HEAD LATHE
MADE IN CHINA 中國制造

SPECIFICATION	TYPE	AKS - XI1340GA
MAX. SWING OVER BED		330 mm
MAX. SWING OVER CROSS SLIDE		198 mm
MAX. SWING OVER GAP		450 mm
DISTANCE BETWEEN CENTER		1000 mm
SPINDLE TAPER		MT.5
SPINDLE HOLE		Ø 38 mm
STEP OF SPINDLE		9 or 18 Step
RANGE OF SPEED		70 - 2000 Rpm
LONGITUDINAL SPEED		0.079 - 1.291 mm/rev
RANGE OF CROSS FEED		0.017 - 0.276 mm/rev
IMPERIAL THREADS		4 - 60 TPI
TAPER OF TAILSTOCK QUILL		MT.3
MOTOR POWER		1.5 kw(1 Phs / 3 Phs)
OVERALL DIMENSION W/ STAND		1880 x 720 x 1400 mm
WEIGHT		581 kg

金工精密车床



AKS-SMD1340GA
PRECISION GEAR HEAD LATHE
MADE IN CHINA 中國制造


SPECIFICATION	TYPE	AKS - SMD1340GA
MAX. SWING OVER BED		330 mm
MAX. SWING OVER CROSS SLIDE		198 mm
MAX. SWING OVER GAP		476 mm
CENTER HEIGHT		166 mm
DISTANCE BETWEEN CENTER		1000 mm
BED WIDTH / HEIGHT		187 mm / 290 mm
SPINDLE HOLE		Ø 38 mm
SPINDLE SPEED		70 - 2000 Rpm
CROSS / COMPOUND SLIDE TRAVEL		160 mm / 68 mm
LEAD SCREW / FEED ROAD DIAMETER		22 mm / 19 mm
IMPERIAL / MATRIC THREAD		2 ¼-40 TPI / 0.45-10 mm
LONGITUDINAL / CROSS FEED		0.078 - 1.044 mm/r
TAILSTOCK QUILL DIAMETER & TAPER		32 mm & MT#3
POWER OF MOTOR		1.5 kw
PACKING SIZE W/ STAND		1930 x 760 x 1520 mm
WEIGHT		641 kg

Gambar dan Spesifikasi Mesin tidak semua 100% sesuai

www.aksjakarta.com

May control electromotor frequency to change spindle speed

Hi-Lo gear change mechanism may increase the pull-up torque

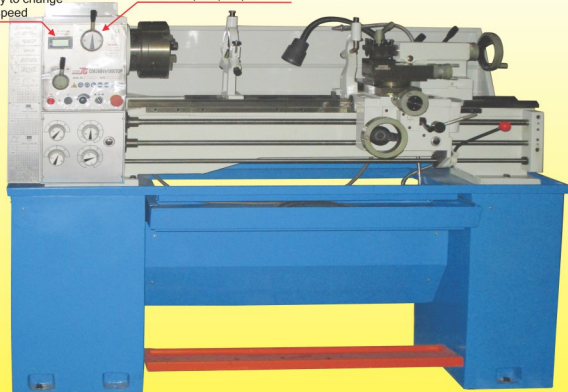

金工车床

AKS-XI1340CBD

BIG SPINDLE PRECISION GEAR HEAD LATHE
W/ CONTROL ELECTRO MOTOR FREQUENCY

MADE IN CHINA 中國制造

SPECIFICATION	TYPE	AKS-XI1340CBD
MAX. SWING OVER BED		330 mm
MAX. SWING OVER CROSS SLIDE		224 mm
MAX. SWING OVER GAP		450 mm
CARRIAGE TRAVEL		710 mm
DISTANCE BETWEEN CENTER		1000 mm
SPINDLE BORE		51 mm
TAPER OF SPINDLE BORE		MT#6
SPINDLE SPEED		70-2000rpm or 40-1800rpm
RANGE OF LONGITUDINAL FEEDS		0.078 - 1.044 mm/rev
RANGE CROSS FEED		0.022 - 0.298 mm/rev
RANGE OF METRIC THREADS		0.45 - 10.0 mm
RANGE OF INCH THREADS		2 1/4 - 40 TPI
MAX. SIZE OF TOOL SHANK		20 x 20 mm
TAPER OF TAILSTOCK BORE		MT#4
MOTOR POWER		1.5 kw
OVERALL DIMENSION		1940 x 760 x 1520 mm
WEIGHT		790 kg

金工精密车床



AKS-XI1440CB

PRECISION GEAR HEAD LATHE

MADE IN CHINA 中國制造

SPECIFICATION	TYPE	AKS-XI1440CB
MAX. SWING OVER BED		356 mm
MAX. SWING OVER CROSS SLIDE		224 mm
MAX. SWING OVER GAP		476 mm
DISTANCE BETWEEN CENTER		1000 mm
SPINDLE BORE		38 mm
TAPER OF SPINDLE BORE		MT#6
SPINDLE SPEED		70 - 2000 Rpm
RANGE OF LONGITUDINAL FEEDS		0.078 - 1.044 mm/rev
RANGE CROSS FEED		0.022 - 0.298 mm/rev
RANGE OF METRIC THREADS		0.45 - 10.0 mm
RANGE OF INCH THREADS		2 1/4 - 40 TPI
MAX. SIZE OF TOOL SHANK		20 x 20 mm
TAPER OF TAILSTOCK BORE		MT#4
MOTOR POWER		1.5 kw
OVERALL DIMENSION		1940 x 760 x 1520 mm
WEIGHT		786 kg

Gambar dan Spesifikasi Mesin tidak semua 100% sesuai

www.aksjakarta.com