




金工搖臂鑽

AKS-OJ32100
RADIAL DRILLING MACHINE
MADE IN CHINA 中國制造

SPECIFICATION	TYPE	AKS-OJ32100
DRILLING CAPACITY		32 mm
DIAMETER OF OUTER COLUMN		200 mm
DISTANCE FM SPINDLE TO COLUMN		200 - 910 mm
FM SPINDLE NOSE TO SURFACE BASE		330 - 1060 mm
ROCKER ARM LIFTING DISTANCE		730 mm
SPINDLE TRAVEL		120 mm
SPINDLE TAPER		MT.4
SPINDLE SPEED RANGE		108 - 1000 Rpm
SPINDLE FEEDS		0.10, 0.16, 0.25 mm/r
ROCKER ARM LIFTING SPEED		1.21 ± 90°
MAIN MOTOR, ELEVATING MOTOR		1.5 kw, 00.55 kw
OVERALL DIMENSION		140 x 66 x 206 cm
WEIGHT		590 kg

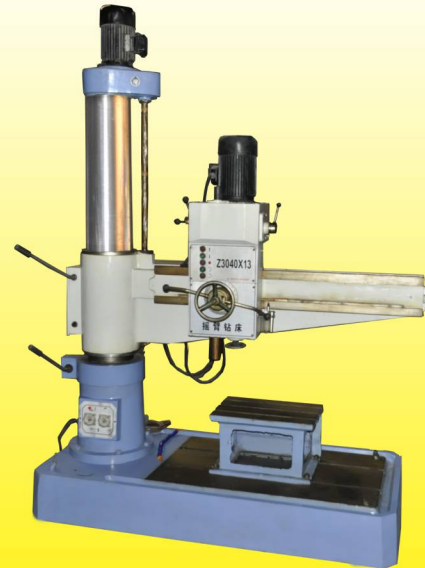

金工搖臂鑽


AKS-RM40130D
DOUBLE COLUMN RADIAL DRILLING MACHINE
MADE IN CHINA 中國制造

SPECIFICATION	TYPE	AKS-RM40130D
DRILLING CAPACITY		40 mm
DIAMETER OF OUTER COLUMN		250 mm
DISTANCE FM SPINDLE TO COLUMN		330 - 1200 mm
FM SPINDLE NOSE TO SURFACE BASE		450 - 1050 mm
SPINDLE TAPER		MT.4
SPINDLE SPEED SERIES		6 Step
SPINDLE SPEED RANGE		108 - 1000 Rpm
SPINDLE FEEDS		0.04 - 3.2 mm/r
WORK TABLE SIZE		550 x 450 x 400 mm
MAIN MOTOR, ELEVATING MOTOR		2.2 kw, 00.55 kw, 0.09 kw
OVERALL DIMENSION		178 x 78 x 208 cm
WEIGHT		1145 kg

Gambar dan Spesifikasi Mesin tidak semua 100% sesuai
www.aksjakarta.com

金工搖臂鑽

AKS-AD40130



DISKON
SPELIAL
特價

AKS-AD40130D, AKS-AD40130

DOUBLE COLUMN RADIAL DRILLING MACHINE

MADE IN CHINA 中國製造

SPECIFICATION TYPE	AKS-AD40130D	AKS-AD40130	AKS-RM40130
Drilling capacity	40 mm	40 mm	40 mm
Distance from spindle to column	1300 - 300 mm	1300 - 300 mm	1000 - 360 mm
Axis to column	1000 - 260 mm	1000 - 260 mm	1000 - 260 mm
Diameter of outer column	200 mm	200 mm	200 mm
Spindle speed series	6	6	6
Motor power	2.2 kw	2.2 kw	2.2 kw
Overall dimension	150x70x220 cm	150x70x220 cm	170x70x212 cm
Weight	1196 kg	985 kg	1330 kg

金工搖臂鑽

AKS-OJ40130

AKS-OJ40130
AKS-OJ40130D
AKS-OJ40130DB



DOUBLE COLUMN RADIAL DRILLING MACHINE

MADE IN CHINA 中國製造

SPECIFICATION TYPE	AKS-OJ40130	OJ40130D	OJ40130DB
Drilling capacity	40 mm	40 mm	40 mm
Distance fm spindle to column	430-1210 mm	430-1210 mm	430-1210 mm
Max. Vertical milling	300-1100 mm	300-1100 mm	300-1100 mm
Diameter of column	230 mm	230 mm	280 mm
Spindle taper	MT.4	MT.4	MT.4
Spindle travel	200 mm	200 mm	200 mm
Spindle speed range	75-1200 mm	75-1200 mm	75-1200 mm
Spindle speed series	6	6	6
Spindle feeds	0.10,0.16,0.22mm/r	0.10,0.16,0.22mm/r	0.10,0.16,0.22mm/r
Rocker swing angle	± 180°	± 180°	± 180°
Main motor, movement motor	2.2 kw, 1.1 kw	2.2 kw, 1.1 kw	2.2 kw, 1.1 kw
Overall dimension	183x78x235cm	183x78x235cm	183x78x235cm
Weight	1097 kg	1097 kg	1385 kg

Gambar dan Spesifikasi Mesin tidak semua 100% sesuai

www.aksjakarta.com



AKS-RM50200

金工
搖臂
鑽



AKS-OJ63200

KHUSUS TYPE
AKS-RM50160
AKS-STC50160
DISKON SPESIAL
特價

AKS-OJ50160,AKS-RM50160,AKS-STC50160,AKS-RM50200,AKS-OJ63200

AUTO RADIAL DRILLING MACHINE

MADE IN CHINA 中國制造

SPECIFICATION	TYPE	AKS-OJ50160	AKS-RM50160	AKS-STC50160	AKS-RM50200	AKS-OJ63200
Drilling capacity		50 mm	50 mm	50 mm	50 mm	63 mm
Distance fm spindle column		350 - 1600 mm	260 - 1150 mm	350 - 1600 mm	360 - 2000 mm	360 - 2000 mm
Axis to column		260 - 1050 mm	360 - 1600 mm	1220 mm	360 - 2000 mm	1250 mm
Distance fm spindle to work table		1250 mm	1220 mm	320 - 1220 mm	360 - 1370 mm	260 - 1050 mm
Spindle travel		220 mm	220 mm	300 mm	350 mm	220 mm
Spindle taper		MT.5	MTS.5	MT.5	MT.5	MT.5
Spindle speed range		78 - 1100 Rpm	25-2000Rpm 16 Step	25 - 2000 Rpm	25 - 2000 r/min	78,135,240,350,590,1100
Spindle feed		1.10,0.16,0.22,0.25,0.35,0.56 Rpm	0.04-3.2Rpm 16 Step	0.04 - 3.2 Rpm	0.04 - 3.2 mm/r	1.10,0.16,0.22,0.25,0.35,0.56
Swivel angle of head stock		360°	360°	360°	360°	360°
Spindle motor power		4 kw	4 kw	4 kw	4 kw	4 kw
Cross travel power		1.5 kw	1.5 kw	1.5 kw	1.5 kw	1.5 kw
Overall dimension		217x85x260 cm	217x81x245 cm	250x106x280 cm	330x123x288 cm	330x123x288 cm
Weight		1655 kg	1700 kg	1715 kg	4680 kg ★	7000 kg ★

Gambar dan Spesifikasi Mesin tidak semua 100% sesuai

www.aksjakarta.com