


## TP 18 200 E

Technical data		
Type	TP 18 200 E	
Control sensor	Internal	
Dry block		
Temperature range*	RT...200 °C	RT...392 °F
Accuracy	±1 °C	±1.8 °F
Stability	±0.1 °C	±0.18 °F
Measurement zone	60...100 mm	2.36...3.94 in.
Block dimensions		
→ Diameter	Ø 18 mm	Ø 0.71 in.
→ Depth	100 mm	3.94 in.
Display unit		
Display	2-line, 4-digit display Red / green, unit °C / °F	
Display range	0...200 °C	32...392 °F
Resolution	1 °C	1 °F
General data		
Dimensions		
→ Width	220 mm	8.66 in.
→ Height	96 mm	3.78 in.
→ Depth	230 + 50 mm	12.99 + 2.76 in.
Weight	Approx. 4 kg	8.82 lbs.
Power supply	230 / 240 VAC, 50 / 60 Hz, optional 100...115 VAC, 50 / 60 Hz	
Power consumption	Approx. 200 W	

\* At an ambient temperature of 20 °C / 68 °F

### Type TP 18 200 E

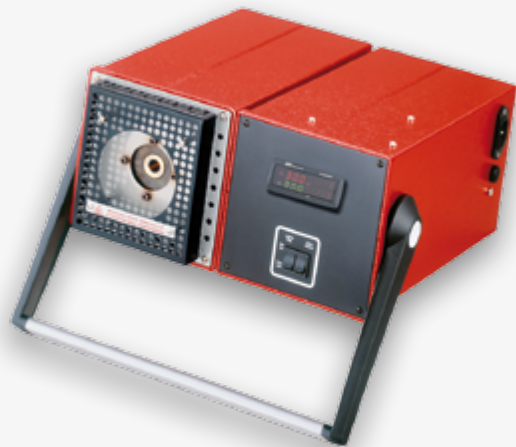

#### Scope of delivery

- Test certificate
- Mains cable
- Insert exchange tool
- Operating manual

#### Accessories

- Transport case
- Adapter sleeve
- DAkkS certificate
- Works certificate



### CV KALINDRA MITRA NIAGA

Phone : 021-5541468  
 HP : 0816-110-5088  
 Email : suhadi@kalindramini.com  
 Website : www.kalindramini.com  
 www.kalindramitra.com