


CAMERA

PVB-5325F

5MP Network IR Water-proof
Bullet Camera



- 5MP (2592 × 1944) H.265 full real time coding
- Max.resolution: 2592 × 1944
- ICR auto switch, true day / night, ROI coding
- 3D DNR, true WDR, HLC, BLC, defog
- 20~30m IR night view distance; motorized zoom lens
- Support CVBS video output and one-way audio
- Support smart phone, iPad, remote monitoring
- DC12V/PoE power supply
- P2P function optional
- IP 66 ingress protection; Support three streams
- Support face detection
- Smart analytics (optional): object removal detection, abnormal video signal detection, line crossing detection, region intrusion detection, people intrusion detection, people counting detection, crowd density detection, etc.

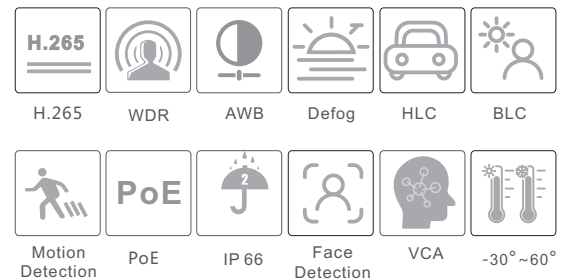

SPECIFICATIONS

Specifications	Model	PVB-5325F
Camera		
Image Sensor	1 / 2.5 "CMOS	
Image Size	2592×1944	
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	
Iris Type	Fixed Iris	
Min. Illumination	0.036 lux @F2.0, AGC ON; 0 lux with IR 0.013 lux @ F1.2, AGC ON; 0 lux with IR	
Lens	3.3 ~ 12 mm @F1.4, horizontal field of view:93.9° ~ 34.8°	
Lens Mount	Φ14	
Wide Dynamic Range	120dB	
BLC	Yes	
HLC	Yes	
Defog	Yes	
Digital NR	3D DNR	
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°	
Image		
Video Compression	H.265 / H.264 / MJPEG	
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile	
Resolution	5MP (2592 × 1944), 4MP (2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240	
Main Stream	60Hz : 5MP(1~30fps)/4MP(1~30fps)/ 2K(1~30fps)/ 3MP(1~30fps)/ 1080P(1~30fps)/ 720P(1~30fps) 50Hz : 5MP(1~25fps)/ 4MP (1~25fps) / 2K (1~25fps) / 3MP (1~25fps) / 1080P (1~25fps) / 720P (1~25fps)	
Sub Stream	60Hz : 720P(1~15fps)/D1(1~30fps)/CIF (1~30fps); 50HZ:720P(1~15fps)/D1(1~25fps)/CIF (1~25fps)	
Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50HZ: D1/CIF/480x240 (1~25fps)	
Bit Rate	128 Kbps ~ 10 Mbps	
Bit Rate Type	VBR / CBR	
Audio Compression	G711A / U	
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ45	
Video Output	CVBS output (BNC × 1)	
Audio	MIC IN × 1	
Storage	No	
Hardware Reset	No	
Functions		
Remote Monitoring	Web browsing,CMS remote control	
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPs, QoS	
Interface Protocol	ONVIF, GB-T/28181-2011	
Storage	Network remote storage	
Smart Alarm	Motion detection	
Intelligent Analytics	Face detection (object removal detection, regional intrusion detection, abnormal video detection, line crossing detection, people intrusion, people counting and crowd density detection are optional)	
General function	Watermark, IP address filtering, video mask, heartbeat, password protection	
PoE	Yes	
IR Distance	20 ~ 30 m	
Ingress Protection	IP66	

Others

Power Supply	DC12V/PoE
Power Consumption	< 8W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Φ 87 × 219
Weight (net)	0.6KG
Installation	Ceiling mounting; Wall mounting

DIMENSIONS

