



Pneumatic and Cushion Forklift Trucks

D35S / D40S / D45S-5 & D50C / D55C-5

G35S / G40S / G45S-5 & G50C / G55C-5

3,500kg to 5,500kg Capacity

PRO5
SERIES



Paper Mill
Surabaya, Jawa Timur

3,500/4,000/4,500/5,000 /5,500kg Capacities

Engine Powered Forklift Trucks Pneumatic Tire

MAIN VEHICLE SPECIFICATIONS

CHARACTERISTICS	1	Manufacture			DOOSAN	DOOSAN	DOOSAN	DOOSAN
	2	Model			D35S-5	D40S-5	D45S-5	D50C-5
	3	Load Capacity	at rated load center	kg	3,500	4,000	4,500	5,000
	4	Load Center		mm	600	600	600	600
	5	Power type	Elec, Diesel, LPG, Gasoline		Diesel	Diesel	Diesel	Diesel
	6	Operator type			Driver-seated	Driver-seated	Driver-seated	Driver-seated
	7	Tire type	P:Pnu, E:Solid Soft, C: Cush		P	P	P	P
	8	Wheels (x=Driven)	Front / Rear		x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2
DIMENSIONS	9	Max. Fork Height	with STD 2-stage mast	mm	3,000	3,000	3,000	3,050
	10	Free Lift		mm	160	160	160	170
	12	Fork Carriage	ISO Class		III	III	IV	IV
	13	Forks	Length x Width x Thickness	mm	1,050 x 150 x 50	1,050 x 150 x 50	1,200 x 150x50	1,200 x 150x60
			Fork Spacing(Min x Max)	mm	310 x 1,182	310 x 1,182	340 x 1,290	340 x 1,290
	14	Tilt of Mast	Forward / Backward	deg	8 / 10	8 / 10	8 / 10	8 / 10
	15	Overall Dimensions	Length to Fork Face	mm	3,100	3,151	3,265	3,300
			Overall Width	mm	1,372	1,451	1,451	1,451
			Mast Lowered Height	mm	2,225	2,230	2,230	2,380
			Mast Extended Height	mm	4,265	4,270	4,420	4,470
			Overhead Guard Height	mm	2,225	2,230	2,230	2,230
			Seat Height	mm	1,248	1,255	1,255	1,255
	21	Turning Radius	Minimum outside	mm	2,770	2,820	2,865	2,930
	22	Load Moment Center		mm	561	561	561	571
	23	Aisle 90 degree stacking(add load length & clearance)		mm	3,331	3,381	3,426	3,501
PERFORMANCE	24	Travel Speed	Loaded / Unloaded	km/h	24 / 25	24 / 25	24 / 25	24 / 25
	25	Lifting Speed	Loaded / Unloaded	mm/s	520 / 540	520 / 540	520 / 540	470 / 540
	26	Lowering Speed	Loaded / Unloaded	mm/s	480 / 450	480 / 450	480 / 450	490 / 450
	28	Max. drawbar pull	Loaded at 1.0 mph (1.6km / h)	kg	3,470	3,450	3,470	3,450
	30	Max. gradeability	Loaded at 1.0 mph (1.6km / h)	%	38	35	32	30
	32	Total Service Weight, Unloaded		kg	5,790	6,180	6,550	7,050
WEIGHT	33	Axle Load	Loaded, Front / Rear	kg	8,215 / 1,075	8,980 / 1,200	9,800 / 1,250	10,680 / 1,370
	34		Unloaded, Front / Rear	kg	2,685 / 3,105	2,660 / 3,520	2,810 / 3,740	2,890 / 4,160
CHASSIS	35	Tires	Number of wheels(F / R)		2 / 2	2 / 2	2 / 2	2 / 2
	36		Size, Front		8.25 x 15-14	300 x 15-18	300 x 15-18	300 x 15-18
	37		Size, Rear		7.00 x 12-12	7.00 x 12-12	7.00 x 12-12	7.00 x 12-14
	38	Wheel Base	Distance	mm	2,000	2,000	2,100	2,100
	39	Tread Width	Front / Rear	mm	1,138 / 1,115	1,153 / 1,115	1,153 / 1,115	1,153 / 1,115
	40	Ground Clearance	Loaded at the lowest point	mm	160	160	160	160
			Loaded at center of wheelbase	mm	205	205	205	205
	42	Brakes	Service		shoe / disc	shoe / disc	shoe / disc	shoe / disc
			Parking		ratchet	ratchet	ratchet	ratchet
	POWER TRAIN	45	Battery	Voltage / Ampere	V/AH	24 / 75	24 / 75	24 / 75
49		Engine	Model		DB58S	DB58S	DB58S	DB58S
50			Rated Power(DIN)	HP/rpm	92 / 2,200	92 / 2,200	92 / 2,200	92 / 2,200
				kW/rpm	68 / 2,200	68 / 2,200	68 / 2,200	68 / 2,200
51			Maximum Torque	N-m/rpm	324 / 1,600	324 / 1,600	324 / 1,600	324 / 1,600
52			Cylinders / Displacements	CC	6 / 5,785	6 / 5,785	6 / 5,785	6 / 5,785
55		Transmission	Type		powershift	powershift	powershift	powershift
			Number of Speed (Fwd / Rev)		2 / 2	2 / 2	2 / 2	2 / 2
57		Hydraulic Pressure	System	bar	190	190	210	210
			Attachment	bar	140	140	140	140

Note: Specification values quoted in this specification sheet has been rounded. Performance may vary due to operation conditions.
Products and specifications are subject to improvement and change without prior notices.


3,500/4,000/4,500/5,000/5,500 kg Capacities

Engine Powered Forklift Trucks

Pneumatic Tire

DOOSAN	DOOSAN	DOOSAN	DOOSAN	DOOSAN	DOOSAN
D55C-5	G35S-5	G40S-5	G45S-5	G50C-5	G55C-5
5,500	3,500	4,000	4,500	5,000	5,500
600	600	600	600	600	600
Diesel	LPG	LPG	LPG	LPG	LPG
Driver-seated	Driver-seated	Driver-seated	Driver-seated	Driver-seated	Driver-seated
P	p	p	p	p	P
x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2
3,050	3,000	3,000	3,000	3,050	3,050
170	160	160	160	170	170
IV	III	III	IV	IV	IV
1,200 x 150x60	1,050 x 150 x 50	1,050 x 150 x 50	1,200 x 150 x 50	1,200 x 150 x 60	1,200 x 150 x 60
340 x 1,290	310 x 1,182	310 x 1,182	340 x 1,290	340 x 1,290	340 x 1,290
8 / 10	8 / 10	8 / 10	8 / 10	8 / 10	8 / 10
3,350	3,100	3,150	3,265	3,300	3,350
1,451	1,372	1,451	1,451	1,451	1,451 1,372
2,380	2,225	2,230	2,230	2,380	2,380
4,470	4,265	4,270	4,420	4,470	4,470
2,230	2,225	2,230	2,230	2,230	2,230
1,255	1,248	1,255	1,255	1,255	1,255
2,990	2,770	2,820	2,865	2,930	2,990
571	561	561	561	571	571
3,561	3,331	3,381	3,426	3,501	3,561
24 / 25	20 / 21	19.5 / 20.5	19.5 / 20.5	19.5 / 20.5	19.5 / 20.5
470 / 540	500 / 540	500 / 540	500 / 540	490 / 540	470 / 540
490 / 450	480 / 450	480 / 450	480 / 450	490 / 450	490 / 450
3,430	3,355	3,430	3,410	3,410	3,600
28	36	33.5	30.7	30.7	28
7,390	5,790	6,180	6,550	7,050	7,390
11,370 / 1,520	8,215 / 1,075	8,980 / 1,200	9,800 / 1,250	10,680 / 1,370	11,370 / 1,520
2,800 / 4,590	2,685 / 3,105	2,660 / 3,520	2,810 / 3,740	2,890 / 4,160	2,800 / 4,590
2 / 2	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
300 x 15-18	8.25 x 15-14	300 x 15-18	300 x 15-18	300 x 15-18	300 x 15-18
7.00 x 12-14	7.00 x 12-12	7.00 x 12-12	7.00 x 12-12	7.00 x 12-14	7.00 x 12-14
2,100	2,000	2,000	2,100	2,100	2,100
1,153 / 1,115	1,138 / 1,115	1,153 / 1,115	1,153 / 1,115	1,153 / 1,115	1,153 / 1,115
160	160	160	160	160	160
205	205	205	205	205	205
shoe / disc	shoe / disc	shoe / disc	shoe / disc	shoe / disc	shoe / disc
ratchet	ratchet	ratchet	ratchet	ratchet	ratchet
24 / 75	12 / 75	12 / 75	12 / 75	12 / 75	12 / 75
DB58S	G643(E)	G643(E)	G643(E)	G643(E)	G643(E)
92 / 2,200	93 / 2,450	93 / 2,450	93 / 2,450	93 / 2,450	93 / 2,450
68 / 2,200	69 / 2,450	69 / 2,450	69 / 2,450	69 / 2,450	69 / 2,450
324 / 1,600	31 / 1,400	31 / 1,400	31 / 1,400	31 / 1,400	31 / 1,400
6 / 5,785	6 / 4,294	6 / 4,294	6 / 4,294	6 / 4,294	6 / 4,294
powershift	powershift	powershift	powershift	powershift	powershift
2 / 2	2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
230	190	190	210	210	230
140	140	140	140	140	140

DIMENSIONAL DRAWING

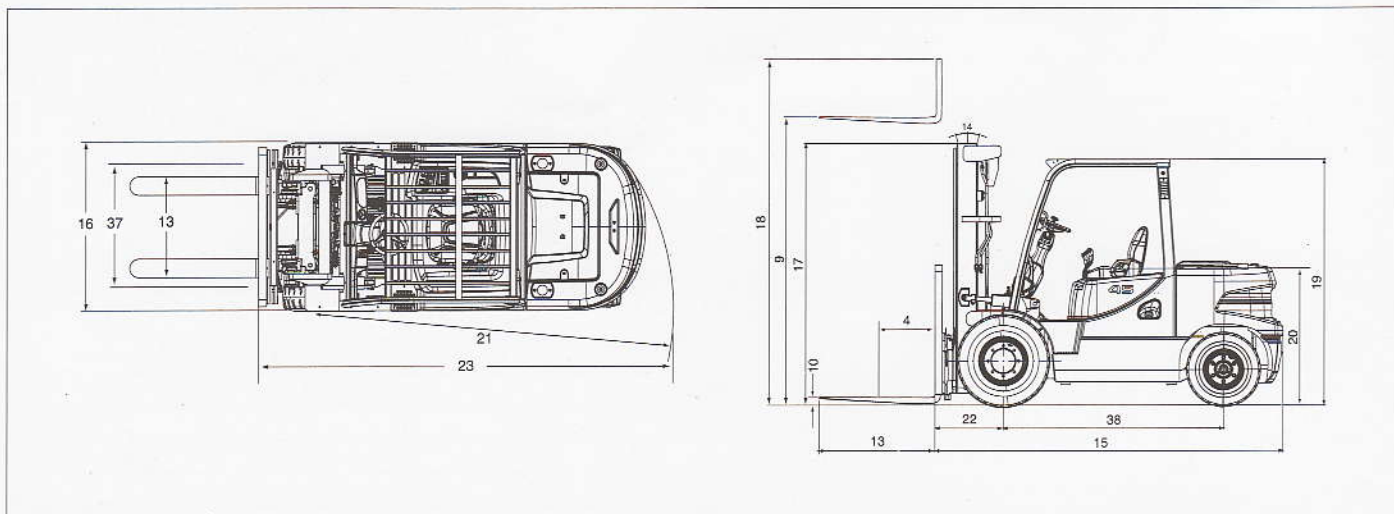

MAST SPECIFICATIONS and RATED CAPACITIES

D/G35S-5, D/G40SC-5


Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities							
					D,G35S-5, D,G40SC-5							
			With Load Backrest	With Load Backrest	Tilt Angle				Load Capacities			
					Single Pneu.		Double Pneu.		Single Pneu.		Double Pneu.	
	mm	mm	mm	mm	FWD	BWD	FWD	BWD	LC500mm	LC600mm	LC500mm	LC600mm
STD	3000	2225	4265	160	8	10	8	10	4000	3655	4000	3655
	3300	2375	4565	160	8	10	8	10	4000	3655	4000	3655
	3650	2550	4915	160	8	10	8	10	4000	3655	4000	3655
	4000	2875	5265	160	8	10	8	10	4000	3655	4000	3655
	4250	3000	5515	160	8	10	8	10	4000	3655	4000	3655
	4850	3450	6115	160	8	8	8	10	3850	3520	3875	3545
FF	3000	2205	4250	1005	8	10	8	10	4000	3660	4000	3660
FFT	4000	2090	5265	890	8	8	8	8	3975	3645	4000	3670
	4250	2175	5530	975	8	8	8	8	3900	3575	3950	3625
	4700	2325	5980	1125	8	8	8	8	3775	3465	3800	3485
	5150	2475	6430	1275	8	5	8	8	3650	3350	3675	3370
	5600	2625	6880	1425	8	3	8	8	3525	3235	3550	3255
	6050	2775	7330	1575	8	3	8	5	3075	2820	3450	3165

D/G40S-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities							
					D,G40S-5							
			With Load Backrest	With Load Backrest	Tilt Angle				Load Capacities			
					Single Pneu.		Double Pneu.		Single Pneu.		Double Pneu.	
	mm	mm	mm	mm	FWD	BWD	FWD	BWD	LC500mm	LC600mm	LC500mm	LC600mm
STD	3000	2230	4270	160	8	10	8	10	4500	4115	4500	4115
	3300	2380	4570	160	8	10	8	10	4500	4115	4500	4115
	3650	2555	4920	160	8	10	8	10	4500	4115	4500	4115
	4000	2880	5270	160	8	10	8	10	4500	4115	4500	4115
	4250	3005	5520	160	8	10	8	10	4500	4115	4500	4115
	4850	3455	6120	160	8	8	8	10	4400	4025	4425	4045
FF	3000	2210	4255	1010	8	10	8	10	4500	4115	4500	4115
FFT	4000	2090	5270	890	8	8	8	8	4500	4125	4500	4125
	4250	2180	5535	980	8	8	8	8	4475	4105	4500	4125
	4700	2330	5985	1130	8	8	8	8	4325	3965	4350	3990
	5150	2480	6435	1280	8	5	8	5	4175	3830	4225	3875
	5600	2630	6885	1430	8	3	8	3	4050	3715	4075	3740
	6050	2780	7335	1580	8	3	8	3	3750	3440	3800	3485

Note : Mast Specifications & Rated Capacities are based on standard chassis with pneumatic tire and without side shifter.

DIMENSIONAL DRAWING

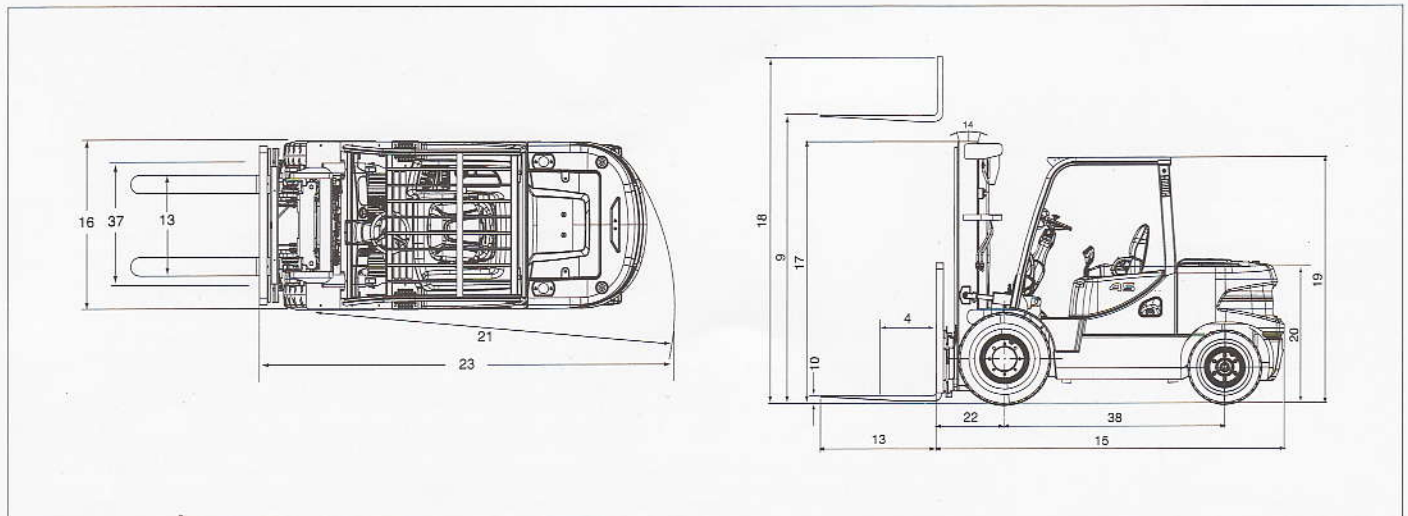

MAST SPECIFICATIONS and RATED CAPACITIES

D/G35S-5, D/G40SC-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities							
					D.G35S-5, D.G40SC-5							
					Tilt Angle				Load Capacities			
					Single Pneu.		Double Pneu.		Single Pneu.		Double Pneu.	
			With Load Backrest	With Load Backrest	FWD	BWD	FWD	BWD	LC500mm	LC600mm	LC500mm	LC600mm
	mm	mm	mm	mm	deg	deg	deg	deg	kg	kg	kg	kg
STD	3000	2225	4265	160	8	10	8	10	4000	3655	4000	3655
	3300	2375	4565	160	8	10	8	10	4000	3655	4000	3655
	3650	2550	4915	160	8	10	8	10	4000	3655	4000	3655
	4000	2875	5265	160	8	10	8	10	4000	3655	4000	3655
	4250	3000	5515	160	8	10	8	10	4000	3655	4000	3655
	4850	3450	6115	160	8	8	8	10	3850	3520	3875	3545
FF	3000	2205	4250	1005	8	10	8	10	4000	3660	4000	3660
FFT	4000	2090	5265	890	8	8	8	8	3975	3645	4000	3670
	4250	2175	5530	975	8	8	8	8	3900	3575	3950	3625
	4700	2325	5980	1125	8	8	8	8	3775	3465	3800	3485
	5150	2475	6430	1275	8	5	8	8	3650	3350	3675	3370
	5600	2625	6880	1425	8	3	8	8	3525	3235	3550	3255
	6050	2775	7330	1575	8	3	8	5	3075	2820	3450	3165

D/G40S-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities							
					D.G40S-5							
					Tilt Angle				Load Capacities			
					Single Pneu.		Double Pneu.		Single Pneu.		Double Pneu.	
			With Load Backrest	With Load Backrest	FWD	BWD	FWD	BWD	LC500mm	LC600mm	LC500mm	LC600mm
	mm	mm	mm	mm	deg	deg	deg	deg	kg	kg	kg	kg
STD	3000	2230	4270	160	8	10	8	10	4500	4115	4500	4115
	3300	2380	4570	160	8	10	8	10	4500	4115	4500	4115
	3650	2555	4920	160	8	10	8	10	4500	4115	4500	4115
	4000	2880	5270	160	8	10	8	10	4500	4115	4500	4115
	4250	3005	5520	160	8	10	8	10	4500	4115	4500	4115
	4850	3455	6120	160	8	8	8	10	4400	4025	4425	4045
FF	3000	2210	4255	1010	8	10	8	10	4500	4115	4500	4115
FFT	4000	2090	5270	890	8	8	8	8	4500	4125	4500	4125
	4250	2180	5535	980	8	8	8	8	4475	4105	4500	4125
	4700	2330	5985	1130	8	8	8	8	4325	3965	4350	3990
	5150	2480	6435	1280	8	5	8	5	4175	3830	4225	3875
	5600	2630	6885	1430	8	3	8	3	4050	3715	4075	3740
	6050	2780	7335	1580	8	3	8	3	3750	3440	3800	3485

Note : Mast Specifications & Rated Capacities are based on standard chassis with pneumatic tire and without side shifter.

D/G45S-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities							
					D.G45S-5							
					Tilt Angle				Load Capacities			
					Single Pneu.		Double Pneu.		Single Pneu.		Double Pneu.	
			With Load Backrest	With Load Backrest	FWD	BWD	FWD	BWD	LC500mm	LC600mm	LC500mm	LC600mm
	mm	mm	mm	mm	deg	deg	deg	deg	kg	kg	kg	kg
STD	3000	2230	4420	160	8	10	8	10	5000	4570	5000	4570
	3300	2380	4720	160	8	10	8	10	5000	4570	5000	4570
	3650	2555	5070	160	8	10	8	10	5000	4570	5000	4570
	4000	2880	5420	160	8	10	8	10	5000	4570	5000	4570
	4250	3005	5670	160	8	10	8	10	5000	4570	5000	4570
	4850	3455	6270	160	8	5	8	10	4700	4295	4900	4480
FF	3000	2210	4400	860	8	10	8	10	5000	4575	5000	4575
FFT	4000	2090	5415	740	8	8	8	8	5000	4585	5000	4585
	4250	2180	5680	830	8	8	8	8	4975	4585	5000	4585
	4700	2330	6130	980	8	8	8	8	4800	4400	4850	4450
	5150	2480	6580	1130	8	3	8	8	4525	4150	4650	4265
	5600	2630	7030	1280	8	3	8	5	4125	3785	4500	4125
	6050	2780	7480	1430	8	3	8	3	3575	3280	3575	3280

D/G50C-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities							
					D.G50C-5							
					Tilt Angle				Load Capacities			
					Single Pneu.		Double Pneu.		Single Pneu.		Double Pneu.	
			With Load Backrest	With Load Backrest	FWD	BWD	FWD	BWD	LC500mm	LC600mm	LC500mm	LC600mm
	mm	mm	mm	mm	deg	deg	deg	deg	kg	kg	kg	kg
STD	2750	2230	4170	170	8	10	8	10	5500	5030	5500	5030
	3050	2380	4470	170	8	10	8	10	5500	5030	5500	5030
	3400	2555	4820	170	8	10	8	10	5500	5030	5500	5030
	3750	2880	5170	170	8	10	8	10	5500	5030	5500	5030
	4000	3005	5420	170	8	10	8	10	5500	5030	5500	5030
	4600	3455	6020	170	8	8	8	10	4690	5500	5500	5030
FF	2875	2210	4275	870	8	10	8	10	5500	5035	5500	5035
FFT	3875	2090	5290	750	8	8	8	8	5500	5050	5500	5050
	4125	2180	5555	840	8	8	8	8	5500	5050	5500	5050
	4575	2330	6005	990	8	8	8	8	5375	4935	5425	4980
	5025	2480	6455	1140	8	5	8	8	4600	4220	5200	4775
	5475	2630	6905	1290	8	3	8	5	4200	3855	4650	4270
	5925	2780	7355	1440	8	3	8	5	3275	3005	3625	3330

D/G55C-5 (COMPACT)

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities							
					D.G55C-5 (COMPACT)							
					Tilt Angle				Load Capacities			
					Single Pneu.		Double Pneu.		Single Pneu.		Double Pneu.	
			With Load Backrest	With Load Backrest	FWD	BWD	FWD	BWD	LC500mm	LC500mm	LC500mm	LC500mm
	mm	mm	mm	mm	deg	deg	deg	deg	kg		kg	
STD	2750	2230	4170	170	8	10	8	10	5500		5500	
	3050	2380	4470	170	8	10	8	10	5500		5500	
	3400	2555	4820	170	8	10	8	10	5500		5500	
	3750	2880	5170	170	8	10	8	10	5500		5500	
	4000	3005	5420	170	8	10	8	10	5500		5500	
	4600	3455	6020	170	8	8	8	10	4900		5400	
FF	2875	2210	4275	870	8	10	8	10	5500		5500	
FFT	3875	2090	5290	750	8	8	8	8	5500		5500	
	4125	2180	5555	840	8	8	8	8	5500		5500	
	4575	2330	6005	990	8	8	8	8	5500		5500	
	5025	2480	6455	1140	8	5	8	8	4425		5150	
	5475	2630	6905	1290	8	3	8	5	4050		4500	
	5925	2780	7355	1440	8	3	8	5	3125		3500	

Note : Mast Specifications & Rated Capacities are based on standard chassis with pneumatic tire and without side shifter.

PSC0807B3 (July.2008)



Doosan Infracore
Forklifts

Seoul Office : 22nd floor, Doosan Tower Bldg, Euljiro 6-Ga, Jung-Gu, Seoul, Korea.
Tel : 82-2-3398-8633 Fax : 82-2-3398-8619
Web site : <http://iv.doosaninfracore.co.kr/eng>