


Datasheets

# Danfoss Reciprocating compressors **MT / MTZ / NTZ**



**General Characteristics**

Model number (on compressor nameplate)		<b>MTZ125HU4VE</b>
Code number for Singlepack*		MTZ125-4VI
Code number for Industrial pack**		MTZ125-4VM
Drawing number		8504010f
Suction and discharge connections		Rotolock
Suction connection		1-3/4 " Rotolock
Discharge connection		1-1/4 " Rotolock
Suction connection with supplied sleeve		1-1/8 " ODF
Discharge connection with supplied sleeve		3/4 " ODF
Oil sight glass		Threaded
Oil equalisation connection		3/8" flare SAE
Oil drain connection		None
LP gauge port		Schrader
IPR valve		30 bar / 8 bar
Cylinders		4
Swept volume		215,44 cm <sup>3</sup> /rev
Displacement @ Nominal speed		37.5 m <sup>3</sup> /h @ 2900 rpm - 45.2 m <sup>3</sup> /h @ 3500 rpm
Net weight		64 kg
Oil charge		3.9 litre, POE - 175PZ
Maximum system test pressure Low Side / High side		25 bar(g) / 30 bar(g)
Maximum differential test pressure		30 bar
Maximum number of starts per hour		12
Refrigerant charge limit		10 kg
Approved refrigerants		R404A, R134a, R407C, R407A/F, R448A, R449A, R452A

**Dimensions**



D=352 mm

H=519 mm

H1=233 mm

H2=125 mm

H3=- mm

**Terminal box**


IP54 (with cable gland)

1: Screw connectors 10-32 UNF x 9.5

2: Earth M4-12

3: Knock-out Ø 29 mm (1.14")

4: Knock-out Ø 25.5 mm (1.00")

**Electrical Characteristics**

Nominal voltage	380-400V/3/50Hz - 460V/3/60Hz
Voltage range	340-440 V @ 50Hz - 414-506 V @ 60Hz
Winding resistance (between phases) +/- 7% at 25°C	1.57 Ω
Maximum Continuous Current (MCC)	27 A
Locked Rotor Amps (LRA)	105 A
Motor protection	Internal overload protector

**Recommended Installation torques**

Oil sight glass	50 Nm
Power connections / Earth connection	3 Nm / 2 Nm
Mounting bolts	50 Nm

**Parts shipped with compressor**

Mounting kit with grommets, bolts, nuts, sleeves and washers
Suction & Discharge solder sleeves, rotolock nuts and gaskets (shipped with rotolock version only)
Initial oil charge
Installation instructions

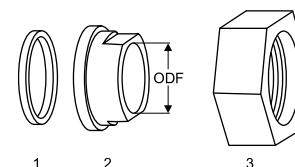
**Approvals** : CE certified, UL certified (file SA6873), -

\*Singlepack: Compressor in cardboard box

\*\*Industrial pack: 6 Unboxed compressors on pallet (order per multiples of 6)

**Rotolock accessories, suction side**
**Code no.**

Solder sleeve, P02 (1-3/4" Rotolock, 1-1/8" ODF)	8153004
Angle adapter, C02 (1-3/4" Rotolock, 1-1/8" ODF)	8168005
Rotolock valve, V02 (1-3/4" Rotolock, 1-1/8" ODF)	8168028
Gasket, 1-3/4"	8156132

**Gaskets, sleeves and nuts**


- 1: Gasket
- 2: Solder sleeve
- 3: Rotolock nut

**Rotolock accessories, discharge side**
**Code no.**

Solder sleeve, P04 (1-1/4" Rotolock, 3/4" ODF)	8153008
Angle adapter, C04 (1-1/4" Rotolock, 3/4" ODF)	8168006
Rotolock valve, V04 (1-1/4" Rotolock, 3/4" ODF)	8168029
Gasket, 1-1/4"	8156131

**Rotolock accessories, sets**
**Code no.**

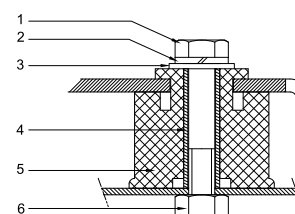
Angle adapter set, C02 (1-3/4"~1-1/8"), C04 (1-1/4"~3/4")	7703014
Valve set, V02 (1-3/4"~1-1/8"), V04 (1-1/4"~3/4")	7703009
Gasket set, 1", 1-1/4", 1-3/4", OSG gaskets black & white	8156009

**Oil / lubricants**
**Code no.**

POE lubricant, 175PZ, 1 litre can	120Z0638
POE lubricant, 175PZ, 2.5 litre can	120Z0639

**Crankcase heaters**
**Code no.**

PTC heater 27W, CE mark, UL	120Z0459
Belt type crankcase heater, 75 W, 230 V, CE mark, UL	7773108
Belt type crankcase heater, 75 W, 400 V, CE mark, UL	7773118
Belt type crankcase heater, 75 W, 460 V, CE mark, UL	120Z0464

**Mounting kit**


- 1: Bolt (4x)
- 2: Lock washer (4x)
- 3: Flat washer (4x)
- 4: Sleeve (4x)
- 5: Grommet (4x)
- 6: Nut (4x)

**Miscellaneous accessories**
**Code no.**

Electronic soft start kit, MCI 25 C	7705007
Soft start kit with statoric resistors, prewired box, SCR03	7705001
Acoustic hood for 4 cylinder compressor	120Z0473
Oil equalisation nut	8153127

**Spare parts**
**Code no.**

Mounting kit for 4 cylinder compressor & MS, including 4 grommets, 4 bolts	8156007
Oil sight glass with gaskets (black & white)	8156019
Gasket for oil sight glass (black chloroprene)	8156145
Service kit for terminal box 96 x 115 mm, including 1 cover, 1 clamp	8156135
T block connector 52 x 57 mm	8173230

**Performance data at 50 Hz, EN 12900 rating conditions**
**R407C**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-15	-10	-5	0	5	10	15	

**Cooling capacity in W**

35	13 025	17 106	21 947	27 643	34 289	41 980	50 812	-	-
40	11 788	15 658	20 230	25 599	31 861	39 112	47 445	-	-
45	10 525	14 178	18 476	23 514	29 388	36 192	44 022	-	-
50	-	12 676	16 695	21 396	26 876	33 229	40 551	-	-
55	-	-	14 893	19 254	24 335	30 232	37 040	-	-
60	-	-	-	17 094	21 771	27 208	33 498	-	-
65	-	-	-	14 925	19 194	24 164	29 931	-	-

**Power input in W**

35	5 760	6 328	6 807	7 209	7 548	7 834	8 081	-	-
40	5 986	6 676	7 265	7 766	8 191	8 552	8 861	-	-
45	6 132	6 965	7 686	8 307	8 840	9 297	9 691	-	-
50	-	7 175	8 050	8 813	9 476	10 051	10 550	-	-
55	-	-	8 336	9 262	10 077	10 791	11 418	-	-
60	-	-	-	9 635	10 622	11 498	12 274	-	-
65	-	-	-	9 911	11 093	12 152	13 099	-	-

**Current consumption in A**

35	10.20	10.99	11.67	12.29	12.91	13.58	14.34	-	-
40	10.49	11.43	12.23	12.93	13.58	14.23	14.94	-	-
45	10.62	11.79	12.76	13.60	14.34	15.03	15.74	-	-
50	-	12.01	13.22	14.25	15.14	15.94	16.70	-	-
55	-	-	13.57	14.85	15.94	16.91	17.79	-	-
60	-	-	-	15.36	16.72	17.91	18.97	-	-
65	-	-	-	15.75	17.44	18.90	20.20	-	-

**Mass flow in kg/h**

35	283	365	461	571	698	842	1 007	-	-
40	269	351	446	555	680	822	984	-	-
45	254	335	429	537	660	800	959	-	-
50	-	318	410	517	638	776	932	-	-
55	-	-	390	495	614	749	903	-	-
60	-	-	-	470	588	721	871	-	-
65	-	-	-	444	559	689	837	-	-

**Coefficient of performance (C.O.P.)**

35	2.26	2.70	3.22	3.83	4.54	5.36	6.29	-	-
40	1.97	2.35	2.78	3.30	3.89	4.57	5.35	-	-
45	1.72	2.04	2.40	2.83	3.32	3.89	4.54	-	-
50	-	1.77	2.07	2.43	2.84	3.31	3.84	-	-
55	-	-	1.79	2.08	2.41	2.80	3.24	-	-
60	-	-	-	1.77	2.05	2.37	2.73	-	-
65	-	-	-	1.51	1.73	1.99	2.29	-	-

**Nominal performance at to = 5 °C, tc = 50 °C**

Cooling capacity	26 876	W
Power input	9 476	W
Current consumption	15.14	A
Mass flow	638	kg/h
C.O.P.	2.84	



to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

**Pressure switch settings**

Maximum HP switch setting	29.4	bar(g)
Minimum LP switch setting	1.4	bar(g)
LP pump down setting	1.7	bar(g)

**Sound power data**

Sound power level	86	dB(A)
With acoustic hood	80	dB(A)

Tolerance according EN12900

Performance data at 50 Hz, ARI rating conditions

R407C

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-15	-10	-5	0	5	10	15	

Cooling capacity in W

35	14 020	18 390	23 566	29 648	36 737	44 930	54 328	-	-
40	12 758	16 922	21 834	27 595	34 304	42 062	50 967	-	-
45	11 464	15 418	20 062	25 496	31 822	39 139	47 549	-	-
50	-	13 885	18 257	23 361	29 299	36 172	44 082	-	-
55	-	-	16 427	21 197	26 744	33 170	40 576	-	-
60	-	-	-	19 013	24 166	30 142	37 043	-	-
65	-	-	-	16 819	21 577	27 102	33 497	-	-

Power input in W

35	5 760	6 328	6 807	7 209	7 548	7 834	8 081	-	-
40	5 986	6 676	7 265	7 766	8 191	8 552	8 861	-	-
45	6 132	6 965	7 686	8 307	8 840	9 297	9 691	-	-
50	-	7 175	8 050	8 813	9 476	10 051	10 550	-	-
55	-	-	8 336	9 262	10 077	10 791	11 418	-	-
60	-	-	-	9 635	10 622	11 498	12 274	-	-
65	-	-	-	9 911	11 093	12 152	13 099	-	-

Current consumption in A

35	10.20	10.99	11.67	12.29	12.91	13.58	14.34	-	-
40	10.49	11.43	12.23	12.93	13.58	14.23	14.94	-	-
45	10.62	11.79	12.76	13.60	14.34	15.03	15.74	-	-
50	-	12.01	13.22	14.25	15.14	15.94	16.70	-	-
55	-	-	13.57	14.85	15.94	16.91	17.79	-	-
60	-	-	-	15.36	16.72	17.91	18.97	-	-
65	-	-	-	15.75	17.44	18.90	20.20	-	-

Mass flow in kg/h

35	281	363	458	568	694	838	1 000	-	-
40	268	349	443	552	676	817	978	-	-
45	252	333	427	534	656	795	953	-	-
50	-	316	408	514	634	771	926	-	-
55	-	-	388	492	610	745	897	-	-
60	-	-	-	468	584	716	866	-	-
65	-	-	-	441	556	685	832	-	-

Coefficient of performance (C.O.P.)

35	2.43	2.91	3.46	4.11	4.87	5.73	6.72	-	-
40	2.13	2.53	3.01	3.55	4.19	4.92	5.75	-	-
45	1.87	2.21	2.61	3.07	3.60	4.21	4.91	-	-
50	-	1.94	2.27	2.65	3.09	3.60	4.18	-	-
55	-	-	1.97	2.29	2.65	3.07	3.55	-	-
60	-	-	-	1.97	2.27	2.62	3.02	-	-
65	-	-	-	1.70	1.95	2.23	2.56	-	-

Nominal performance at to = 7.2 °C, tc = 54.4 °C

Cooling capacity	29 788	W
Power input	10 325	W
Current consumption	16.28	A
Mass flow	671	kg/h
C.O.P.	2.89	

Pressure switch settings

Maximum HP switch setting	29.4	bar(g)
Minimum LP switch setting	1.4	bar(g)
LP pump down setting	1.7	bar(g)

Sound power data

Sound power level	86	dB(A)
With acoustic hood	80	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

Performance data at 50 Hz, EN 12900 rating conditions

R134a

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-25	-20	-10	-5	0	5	10	15

Cooling capacity in W

35	3 731	5 407	10 130	13 320	17 158	21 716	27 065	33 277	40 424
40	3 197	4 782	9 224	12 224	15 839	20 141	25 200	31 090	37 880
45	2 666	4 156	8 306	11 110	14 496	18 535	23 299	28 860	35 289
50	2 150	3 537	7 384	9 987	13 138	16 909	21 372	26 598	32 659
55	-	-	6 469	8 865	11 775	15 272	19 428	24 314	30 002
60	-	-	-	7 753	10 418	13 635	17 478	22 018	27 327
65	-	-	-	-	9 076	12 008	15 532	19 720	24 644
75	-	-	-	-	-	-	11 692	15 159	19 295

Power input in W

35	2 510	3 006	3 954	4 366	4 712	4 970	5 121	5 146	5 023
40	2 547	3 063	4 082	4 545	4 950	5 278	5 509	5 622	5 599
45	2 528	3 071	4 174	4 693	5 164	5 568	5 885	6 094	6 177
50	2 452	3 028	4 227	4 809	5 353	5 840	6 249	6 560	6 754
55	-	-	4 240	4 891	5 515	6 090	6 598	7 017	7 330
60	-	-	-	4 938	5 647	6 317	6 930	7 465	7 902
65	-	-	-	-	5 747	6 520	7 244	7 900	8 468
75	-	-	-	-	-	-	7 809	8 727	9 576

Current consumption in A

35	6.68	7.17	8.13	8.55	8.91	9.20	9.39	9.47	9.41
40	6.69	7.21	8.25	8.74	9.18	9.55	9.84	10.03	10.10
45	6.64	7.20	8.35	8.90	9.43	9.90	10.30	10.61	10.82
50	6.54	7.14	8.41	9.04	9.66	10.24	10.75	11.19	11.54
55	-	-	8.43	9.15	9.87	10.55	11.20	11.77	12.27
60	-	-	-	9.22	10.04	10.85	11.63	12.35	13.00
65	-	-	-	-	10.18	11.12	12.03	12.91	13.73
75	-	-	-	-	-	-	12.76	13.97	15.15

Mass flow in kg/h

35	95	135	241	310	390	484	592	716	857
40	86	126	231	299	378	471	578	701	840
45	76	115	219	286	365	456	562	683	820
50	66	104	207	273	350	440	544	663	798
55	-	-	193	257	333	422	524	641	774
60	-	-	-	240	315	402	502	617	748
65	-	-	-	-	295	380	478	591	719
75	-	-	-	-	-	-	424	532	655

Coefficient of performance (C.O.P.)

35	1.49	1.80	2.56	3.05	3.64	4.37	5.28	6.47	8.05
40	1.26	1.56	2.26	2.69	3.20	3.82	4.57	5.53	6.77
45	1.05	1.35	1.99	2.37	2.81	3.33	3.96	4.74	5.71
50	0.88	1.17	1.75	2.08	2.45	2.90	3.42	4.05	4.84
55	-	-	1.53	1.81	2.14	2.51	2.94	3.46	4.09
60	-	-	-	1.57	1.84	2.16	2.52	2.95	3.46
65	-	-	-	-	1.58	1.84	2.14	2.50	2.91
75	-	-	-	-	-	-	1.50	1.74	2.01

Nominal performance at to = 5 °C, tc = 50 °C

Cooling capacity	16 909	W
Power input	5 840	W
Current consumption	10.24	A
Mass flow	440	kg/h
C.O.P.	2.90	

Pressure switch settings

Maximum HP switch setting	20.2	bar(g)
Minimum LP switch setting	0.1	bar(g)
LP pump down setting	0.4	bar(g)

Sound power data

Sound power level	0	dB(A)
With acoustic hood	0	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

**Performance data at 50 Hz, ARI rating conditions**
**R134a**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-25	-20	-10	-5	0	5	10	15

**Cooling capacity in W**

35	4 056	5 867	10 953	14 379	18 493	23 371	29 086	35 713	43 326
40	3 495	5 218	10 026	13 263	17 156	21 779	27 206	33 514	40 775
45	2 935	4 564	9 082	12 124	15 788	20 150	25 284	31 266	38 170
50	-	3 914	8 130	10 970	14 400	18 495	23 330	28 981	35 522
55	-	-	7 180	9 813	13 002	16 825	21 355	26 669	32 841
60	-	-	-	8 662	11 605	15 149	19 369	24 341	30 140
65	-	-	-	-	-	13 478	17 382	22 007	27 429
75	-	-	-	-	-	-	13 454	17 373	22 031

**Power input in W**

35	2 510	3 006	3 954	4 366	4 712	4 970	5 121	5 146	5 023
40	2 547	3 063	4 082	4 545	4 950	5 278	5 509	5 622	5 599
45	2 528	3 071	4 174	4 693	5 164	5 568	5 885	6 094	6 177
50	-	3 028	4 227	4 809	5 353	5 840	6 249	6 560	6 754
55	-	-	4 240	4 891	5 515	6 090	6 598	7 017	7 330
60	-	-	-	4 938	5 647	6 317	6 930	7 465	7 902
65	-	-	-	-	-	6 520	7 244	7 900	8 468
75	-	-	-	-	-	-	7 809	8 727	9 576

**Current consumption in A**

35	6.68	7.17	8.13	8.55	8.91	9.20	9.39	9.47	9.41
40	6.69	7.21	8.25	8.74	9.18	9.55	9.84	10.03	10.10
45	6.64	7.20	8.35	8.90	9.43	9.90	10.30	10.61	10.82
50	-	7.14	8.41	9.04	9.66	10.24	10.75	11.19	11.54
55	-	-	8.43	9.15	9.87	10.55	11.20	11.77	12.27
60	-	-	-	9.22	10.04	10.85	11.63	12.35	13.00
65	-	-	-	-	-	11.12	12.03	12.91	13.73
75	-	-	-	-	-	-	12.76	13.97	15.15

**Mass flow in kg/h**

35	94	134	240	308	388	482	589	712	852
40	85	125	230	297	377	469	575	697	835
45	76	115	218	285	363	454	559	679	815
50	-	104	206	271	348	438	541	659	794
55	-	-	192	256	331	419	521	637	770
60	-	-	-	239	313	399	499	614	744
65	-	-	-	-	-	378	475	587	715
75	-	-	-	-	-	-	421	529	651

**Coefficient of performance (C.O.P.)**

35	1.62	1.95	2.77	3.29	3.92	4.70	5.68	6.94	8.62
40	1.37	1.70	2.46	2.92	3.47	4.13	4.94	5.96	7.28
45	1.16	1.49	2.18	2.58	3.06	3.62	4.30	5.13	6.18
50	-	1.29	1.92	2.28	2.69	3.17	3.73	4.42	5.26
55	-	-	1.69	2.01	2.36	2.76	3.24	3.80	4.48
60	-	-	-	1.75	2.06	2.40	2.79	3.26	3.81
65	-	-	-	-	-	2.07	2.40	2.79	3.24
75	-	-	-	-	-	-	1.72	1.99	2.30

**Nominal performance at to = 7.2 °C, tc = 54.4 °C**

Cooling capacity	18 943	W
Power input	6 289	W
Current consumption	10.80	A
Mass flow	465	kg/h
C.O.P.	3.01	

**Pressure switch settings**

Maximum HP switch setting	20.2	bar(g)
Minimum LP switch setting	0.1	bar(g)
LP pump down setting	0.4	bar(g)

**Sound power data**

Sound power level	0	dB(A)
With acoustic hood	0	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

**Performance data at 50 Hz, EN 12900 rating conditions**
**R404A**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-30	-25	-20	-15	-10	-5	0	5

**Cooling capacity in W**

30	7 283	9 943	13 245	17 267	22 089	27 791	34 451	42 148	50 963
35	6 328	8 755	11 770	15 453	19 884	25 142	31 306	38 455	46 669
40	5 457	7 649	10 377	13 721	17 760	22 574	28 242	34 842	42 455
45	4 660	6 616	9 057	12 061	15 708	20 078	25 248	31 300	38 311
50	3 927	5 648	7 800	10 464	13 719	17 643	22 316	27 818	34 227
55	-	4 734	6 598	8 921	11 782	15 261	19 436	24 387	30 194
60	-	3 865	5 440	7 422	9 889	12 922	16 599	20 999	26 202

**Power input in W**

30	5 064	5 716	6 320	6 867	7 350	7 764	8 100	8 351	8 510
35	5 125	5 849	6 533	7 168	7 748	8 266	8 714	9 086	9 374
40	5 154	5 949	6 711	7 433	8 108	8 729	9 289	9 780	10 195
45	5 159	6 023	6 863	7 671	8 439	9 162	9 831	10 440	10 981
50	5 147	6 079	6 995	7 887	8 747	9 570	10 348	11 073	11 740
55	-	6 124	7 114	8 088	9 040	9 962	10 847	11 687	12 477
60	-	6 164	7 228	8 284	9 325	10 344	11 335	12 289	13 201

**Current consumption in A**

30	9.46	10.24	11.02	11.76	12.43	13.00	13.45	13.75	13.87
35	9.55	10.40	11.26	12.10	12.89	13.59	14.19	14.65	14.94
40	9.61	10.54	11.50	12.44	13.35	14.19	14.93	15.56	16.03
45	9.64	10.65	11.70	12.76	13.79	14.78	15.68	16.48	17.14
50	9.61	10.72	11.87	13.05	14.22	15.35	16.42	17.40	18.25
55	-	10.73	12.00	13.30	14.61	15.90	17.14	18.30	19.36
60	-	10.67	12.06	13.49	14.95	16.40	17.82	19.18	20.44

**Mass flow in kg/h**

30	229	306	397	505	630	774	939	1 127	1 338
35	214	289	378	483	605	746	908	1 093	1 301
40	200	273	359	461	581	719	878	1 059	1 264
45	188	257	341	440	557	692	847	1 025	1 226
50	176	243	324	420	533	665	817	992	1 189
55	-	230	307	400	510	639	788	958	1 152
60	-	218	292	382	489	614	759	926	1 116

**Coefficient of performance (C.O.P.)**

30	1.44	1.74	2.10	2.51	3.01	3.58	4.25	5.05	5.99
35	1.23	1.50	1.80	2.16	2.57	3.04	3.59	4.23	4.98
40	1.06	1.29	1.55	1.85	2.19	2.59	3.04	3.56	4.16
45	0.90	1.10	1.32	1.57	1.86	2.19	2.57	3.00	3.49
50	0.76	0.93	1.12	1.33	1.57	1.84	2.16	2.51	2.92
55	-	0.77	0.93	1.10	1.30	1.53	1.79	2.09	2.42
60	-	0.63	0.75	0.90	1.06	1.25	1.46	1.71	1.98

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	15 708	W
Power input	8 439	W
Current consumption	13.79	A
Mass flow	557	kg/h
C.O.P.	1.86	


**Pressure switch settings**

Maximum HP switch setting	27.7	bar(g)
Minimum LP switch setting	1	bar(g)
LP pump down setting	1.3	bar(g)

**Sound power data**

Sound power level	84	dB(A)
With acoustic hood	78	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900



**Performance data at 50 Hz, ARI rating conditions**
**R404A**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-30	-25	-20	-15	-10	-5	0	5

**Cooling capacity in W**

30	8 108	11 039	14 666	19 073	24 344	30 560	37 806	46 162	55 712
35	7 121	9 819	13 161	17 231	22 113	27 890	34 646	42 462	51 423
40	6 221	8 686	11 743	15 476	19 969	25 307	31 574	38 853	47 226
45	5 401	7 633	10 404	13 800	17 906	22 806	28 586	35 329	43 119
50	4 652	6 651	9 138	12 198	15 917	20 383	25 680	31 893	39 106
55	-	5 736	7 939	10 666	14 005	18 041	22 863	28 554	35 202
60	-	4 886	6 812	9 213	12 179	15 798	20 159	25 349	31 453

**Power input in W**

30	5 064	5 716	6 320	6 867	7 350	7 764	8 100	8 351	8 510
35	5 125	5 849	6 533	7 168	7 748	8 266	8 714	9 086	9 374
40	5 154	5 949	6 711	7 433	8 108	8 729	9 289	9 780	10 195
45	5 159	6 023	6 863	7 671	8 439	9 162	9 831	10 440	10 981
50	5 147	6 079	6 995	7 887	8 747	9 570	10 348	11 073	11 740
55	-	6 124	7 114	8 088	9 040	9 962	10 847	11 687	12 477
60	-	6 164	7 228	8 284	9 325	10 344	11 335	12 289	13 201

**Current consumption in A**

30	9.46	10.24	11.02	11.76	12.43	13.00	13.45	13.75	13.87
35	9.55	10.40	11.26	12.10	12.89	13.59	14.19	14.65	14.94
40	9.61	10.54	11.50	12.44	13.35	14.19	14.93	15.56	16.03
45	9.64	10.65	11.70	12.76	13.79	14.78	15.68	16.48	17.14
50	9.61	10.72	11.87	13.05	14.22	15.35	16.42	17.40	18.25
55	-	10.73	12.00	13.30	14.61	15.90	17.14	18.30	19.36
60	-	10.67	12.06	13.49	14.95	16.40	17.82	19.18	20.44

**Mass flow in kg/h**

30	228	304	395	502	626	769	933	1 119	1 329
35	213	287	376	480	602	742	903	1 086	1 292
40	199	271	357	459	577	715	872	1 052	1 255
45	187	256	339	438	553	688	842	1 018	1 218
50	175	242	322	417	530	661	812	985	1 181
55	-	228	306	398	507	635	783	952	1 145
60	-	216	291	380	486	610	754	920	1 109

**Coefficient of performance (C.O.P.)**

30	1.60	1.93	2.32	2.78	3.31	3.94	4.67	5.53	6.55
35	1.39	1.68	2.01	2.40	2.85	3.37	3.98	4.67	5.49
40	1.21	1.46	1.75	2.08	2.46	2.90	3.40	3.97	4.63
45	1.05	1.27	1.52	1.80	2.12	2.49	2.91	3.38	3.93
50	0.90	1.09	1.31	1.55	1.82	2.13	2.48	2.88	3.33
55	-	0.94	1.12	1.32	1.55	1.81	2.11	2.44	2.82
60	-	0.79	0.94	1.11	1.31	1.53	1.78	2.06	2.38

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	17 906	W
Power input	8 439	W
Current consumption	13.79	A
Mass flow	553	kg/h
C.O.P.	2.12	

**Pressure switch settings**

Maximum HP switch setting	27.7	bar(g)
Minimum LP switch setting	1	bar(g)
LP pump down setting	1.3	bar(g)

**Sound power data**

Sound power level	84	dB(A)
With acoustic hood	78	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

**Performance data at 50 Hz, EN 12900 rating conditions**
**R407A**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-30	-25	-20	-15	-10	-5	0	5

**Cooling capacity in W**

30	5 389	7 889	10 980	14 742	19 253	24 591	30 834	38 061	46 350
35	4 604	6 944	9 839	13 367	17 605	22 633	28 529	35 370	43 236
40	3 845	6 021	8 712	11 999	15 959	20 671	26 212	32 661	40 097
45	3 126	5 129	7 611	10 651	14 326	18 714	23 894	29 945	36 944
50	-	4 281	6 547	9 332	12 715	16 774	21 587	27 233	33 789
55	-	-	5 531	8 056	11 140	14 863	19 302	24 536	30 642
60	-	-	-	6 831	9 611	12 991	17 050	21 865	27 516

**Power input in W**

30	3 833	4 527	5 183	5 788	6 332	6 801	7 184	7 468	7 642
35	3 810	4 573	5 308	6 002	6 643	7 220	7 720	8 130	8 440
40	3 749	4 583	5 397	6 181	6 921	7 606	8 223	8 760	9 207
45	3 654	4 559	5 455	6 328	7 168	7 962	8 697	9 363	9 946
50	-	4 507	5 484	6 449	7 389	8 293	9 148	9 942	10 663
55	-	-	5 490	6 547	7 588	8 602	9 578	10 501	11 362
60	-	-	-	6 626	7 770	8 895	9 991	11 046	12 046

**Current consumption in A**

30	8.46	9.21	9.97	10.70	11.37	11.96	12.43	12.75	12.89
35	8.52	9.31	10.13	10.94	11.71	12.42	13.04	13.53	13.87
40	8.57	9.40	10.28	11.18	12.06	12.91	13.68	14.35	14.89
45	8.59	9.47	10.41	11.40	12.40	13.39	14.32	15.17	15.92
50	-	9.48	10.51	11.59	12.72	13.84	14.95	15.99	16.95
55	-	-	10.54	11.73	12.99	14.26	15.54	16.78	17.96
60	-	-	-	11.80	13.19	14.63	16.08	17.53	18.93

**Mass flow in kg/h**

30	128	185	252	332	425	534	659	801	963
35	115	171	237	316	409	516	640	781	941
40	102	157	222	300	391	497	619	759	918
45	89	142	206	282	372	476	597	736	893
50	-	127	189	264	352	455	574	711	866
55	-	-	172	245	331	433	550	684	838
60	-	-	-	226	310	409	524	657	808

**Coefficient of performance (C.O.P.)**

30	1.41	1.74	2.12	2.55	3.04	3.62	4.29	5.10	6.06
35	1.21	1.52	1.85	2.23	2.65	3.13	3.70	4.35	5.12
40	1.03	1.31	1.61	1.94	2.31	2.72	3.19	3.73	4.36
45	0.86	1.12	1.40	1.68	2.00	2.35	2.75	3.20	3.71
50	-	0.95	1.19	1.45	1.72	2.02	2.36	2.74	3.17
55	-	-	1.01	1.23	1.47	1.73	2.02	2.34	2.70
60	-	-	-	1.03	1.24	1.46	1.71	1.98	2.28

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	14 326	W
Power input	7 168	W
Current consumption	12.40	A
Mass flow	372	kg/h
C.O.P.	2.00	

**Pressure switch settings**

Maximum HP switch setting	25.8	bar(g)
Minimum LP switch setting	0.9	bar(g)
LP pump down setting	1.2	bar(g)

**Sound power data**

Sound power level	83	dB(A)
With acoustic hood	77	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

**Performance data at 50 Hz, ARI rating conditions**
**R407A**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)								
	-30	-25	-20	-15	-10	-5	0	5	10

**Cooling capacity in W**

30	5 829	8 519	11 841	15 877	20 708	26 417	33 084	40 792	49 622
35	5 009	7 542	10 670	14 474	19 036	24 439	30 764	38 093	46 508
40	4 213	6 583	9 509	13 075	17 361	22 452	28 428	35 373	43 368
45	3 453	5 653	8 371	11 691	15 696	20 468	26 091	32 646	40 216
50	-	4 764	7 268	10 337	14 053	18 502	23 765	29 925	37 066
55	-	-	6 211	9 023	12 446	16 565	21 465	27 227	33 936
60	-	-	-	7 763	10 888	14 675	19 208	24 571	30 848

**Power input in W**

30	3 833	4 527	5 183	5 788	6 332	6 801	7 184	7 468	7 642
35	3 810	4 573	5 308	6 002	6 643	7 220	7 720	8 130	8 440
40	3 749	4 583	5 397	6 181	6 921	7 606	8 223	8 760	9 207
45	3 654	4 559	5 455	6 328	7 168	7 962	8 697	9 363	9 946
50	-	4 507	5 484	6 449	7 389	8 293	9 148	9 942	10 663
55	-	-	5 490	6 547	7 588	8 602	9 578	10 501	11 362
60	-	-	-	6 626	7 770	8 895	9 991	11 046	12 046

**Current consumption in A**

30	8.46	9.21	9.97	10.70	11.37	11.96	12.43	12.75	12.89
35	8.52	9.31	10.13	10.94	11.71	12.42	13.04	13.53	13.87
40	8.57	9.40	10.28	11.18	12.06	12.91	13.68	14.35	14.89
45	8.59	9.47	10.41	11.40	12.40	13.39	14.32	15.17	15.92
50	-	9.48	10.51	11.59	12.72	13.84	14.95	15.99	16.95
55	-	-	10.54	11.73	12.99	14.26	15.54	16.78	17.96
60	-	-	-	11.80	13.19	14.63	16.08	17.53	18.93

**Mass flow in kg/h**

30	127	184	251	330	423	531	655	796	957
35	115	170	236	315	406	513	636	776	936
40	102	156	221	298	389	494	616	755	913
45	88	141	205	281	370	474	594	731	888
50	-	126	188	263	350	452	571	706	861
55	-	-	171	244	330	430	547	680	833
60	-	-	-	225	308	407	521	653	803

**Coefficient of performance (C.O.P.)**

30	1.52	1.88	2.28	2.74	3.27	3.88	4.61	5.46	6.49
35	1.31	1.65	2.01	2.41	2.87	3.38	3.99	4.69	5.51
40	1.12	1.44	1.76	2.12	2.51	2.95	3.46	4.04	4.71
45	0.94	1.24	1.53	1.85	2.19	2.57	3.00	3.49	4.04
50	-	1.06	1.33	1.60	1.90	2.23	2.60	3.01	3.48
55	-	-	1.13	1.38	1.64	1.93	2.24	2.59	2.99
60	-	-	-	1.17	1.40	1.65	1.92	2.22	2.56

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	15 696	W
Power input	7 168	W
Current consumption	12.40	A
Mass flow	370	kg/h
C.O.P.	2.19	

**Pressure switch settings**

Maximum HP switch setting	25.8	bar(g)
Minimum LP switch setting	0.9	bar(g)
LP pump down setting	1.2	bar(g)

**Sound power data**

Sound power level	83	dB(A)
With acoustic hood	77	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

**Performance data at 50 Hz, EN 12900 rating conditions**
**R407F**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)								
	-30	-25	-20	-15	-10	-5	0	5	10

**Cooling capacity in W**

30	-	8 577	12 060	16 303	21 402	27 448	34 536	42 760	52 213
35	-	7 354	10 501	14 344	18 977	24 493	30 987	38 551	47 280
40	-	6 350	9 213	12 709	16 929	21 968	27 919	34 877	42 934
45	-	5 522	8 155	11 355	15 216	19 830	25 292	31 696	39 135
50	-	-	7 285	10 242	13 795	18 038	23 064	28 966	35 839
55	-	-	-	9 327	12 626	16 549	21 191	26 645	33 004
60	-	-	-	-	-	-	-	-	-

**Power input in W**

30	-	4 819	5 485	6 115	6 678	7 138	7 464	7 621	7 576
35	-	4 889	5 617	6 334	7 007	7 602	8 087	8 428	8 592
40	-	4 964	5 740	6 530	7 299	8 016	8 647	9 158	9 517
45	-	5 069	5 879	6 728	7 581	8 406	9 169	9 837	10 376
50	-	-	6 060	6 954	7 877	8 796	9 677	10 488	11 196
55	-	-	-	7 233	8 212	9 211	10 198	11 138	12 000
60	-	-	-	-	-	-	-	-	-

**Current consumption in A**

30	-	9.22	10.03	10.82	11.54	12.15	12.61	12.87	12.88
35	-	9.44	10.30	11.16	11.99	12.74	13.37	13.82	14.06
40	-	9.57	10.49	11.44	12.38	13.28	14.08	14.73	15.20
45	-	9.65	10.63	11.68	12.75	13.80	14.78	15.64	16.35
50	-	-	10.78	11.93	13.13	14.34	15.51	16.59	17.55
55	-	-	-	12.23	13.57	14.94	16.31	17.62	18.83
60	-	-	-	-	-	-	-	-	-

**Mass flow in kg/h**

30	-	177	246	327	423	535	665	813	983
35	-	159	224	301	393	499	623	765	928
40	-	145	207	280	368	470	589	726	882
45	-	133	193	264	348	447	562	694	845
50	-	-	183	253	335	430	542	670	817
55	-	-	-	246	326	420	529	654	798
60	-	-	-	-	-	-	-	-	-

**Coefficient of performance (C.O.P.)**

30	-	1.78	2.20	2.67	3.20	3.85	4.63	5.61	6.89
35	-	1.50	1.87	2.26	2.71	3.22	3.83	4.57	5.50
40	-	1.28	1.61	1.95	2.32	2.74	3.23	3.81	4.51
45	-	1.09	1.39	1.69	2.01	2.36	2.76	3.22	3.77
50	-	-	1.20	1.47	1.75	2.05	2.38	2.76	3.20
55	-	-	-	1.29	1.54	1.80	2.08	2.39	2.75
60	-	-	-	-	-	-	-	-	-

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	15 216	W
Power input	7 581	W
Current consumption	12.75	A
Mass flow	348	kg/h
C.O.P.	2.01	

**Pressure switch settings**

Maximum HP switch setting	24	bar(g)
Minimum LP switch setting	1	bar(g)
LP pump down setting	1.26	bar(g)

**Sound power data**

Sound power level	83	dB(A)
With acoustic hood	77	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

**Performance data at 50 Hz, ARI rating conditions**
**R407F**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)								
	-30	-25	-20	-15	-10	-5	0	5	10

**Cooling capacity in W**

30	-	9 192	12 912	17 438	22 869	29 303	36 837	45 570	55 598
35	-	7 919	11 294	15 410	20 366	26 259	33 188	41 252	50 546
40	-	6 874	9 962	13 724	18 259	23 668	30 047	37 496	46 113
45	-	6 017	8 873	12 337	16 509	21 489	27 374	34 265	42 261
50	-	-	7 986	11 210	15 076	19 684	25 134	31 525	38 956
55	-	-	-	10 304	13 924	18 220	23 293	29 244	36 173
60	-	-	-	-	-	-	-	-	-

**Power input in W**

30	-	4 819	5 485	6 115	6 678	7 138	7 464	7 621	7 576
35	-	4 889	5 617	6 334	7 007	7 602	8 087	8 428	8 592
40	-	4 964	5 740	6 530	7 299	8 016	8 647	9 158	9 517
45	-	5 069	5 879	6 728	7 581	8 406	9 169	9 837	10 376
50	-	-	6 060	6 954	7 877	8 796	9 677	10 488	11 196
55	-	-	-	7 233	8 212	9 211	10 198	11 138	12 000
60	-	-	-	-	-	-	-	-	-

**Current consumption in A**

30	-	9.22	10.03	10.82	11.54	12.15	12.61	12.87	12.88
35	-	9.44	10.30	11.16	11.99	12.74	13.37	13.82	14.06
40	-	9.57	10.49	11.44	12.38	13.28	14.08	14.73	15.20
45	-	9.65	10.63	11.68	12.75	13.80	14.78	15.64	16.35
50	-	-	10.78	11.93	13.13	14.34	15.51	16.59	17.55
55	-	-	-	12.23	13.57	14.94	16.31	17.62	18.83
60	-	-	-	-	-	-	-	-	-

**Mass flow in kg/h**

30	-	176	244	325	421	532	661	808	976
35	-	159	223	300	390	496	619	761	922
40	-	144	205	279	366	467	585	721	876
45	-	132	192	263	346	444	558	689	839
50	-	-	182	251	333	428	538	666	811
55	-	-	-	244	324	418	526	650	792
60	-	-	-	-	-	-	-	-	-

**Coefficient of performance (C.O.P.)**

30	-	1.91	2.35	2.85	3.42	4.11	4.94	5.98	7.34
35	-	1.62	2.01	2.43	2.91	3.45	4.10	4.89	5.88
40	-	1.38	1.74	2.10	2.50	2.95	3.47	4.09	4.85
45	-	1.19	1.51	1.83	2.18	2.56	2.99	3.48	4.07
50	-	-	1.32	1.61	1.91	2.24	2.60	3.01	3.48
55	-	-	-	1.42	1.70	1.98	2.28	2.63	3.01
60	-	-	-	-	-	-	-	-	-

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	16 509	W
Power input	7 581	W
Current consumption	12.75	A
Mass flow	346	kg/h
C.O.P.	2.18	

**Pressure switch settings**

Maximum HP switch setting	24	bar(g)
Minimum LP switch setting	1	bar(g)
LP pump down setting	1.26	bar(g)

**Sound power data**

Sound power level	83	dB(A)
With acoustic hood	77	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

**Performance data at 50 Hz, EN 12900 rating conditions**
**R134a**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-25	-20	-10	-5	0	5	10	15

**Cooling capacity in W**

35	3 731	5 407	10 130	13 320	17 158	21 716	27 065	33 277	40 424
40	3 197	4 782	9 224	12 224	15 839	20 141	25 200	31 090	37 880
45	2 666	4 156	8 306	11 110	14 496	18 535	23 299	28 860	35 289
50	2 150	3 537	7 384	9 987	13 138	16 909	21 372	26 598	32 659
55	-	-	6 469	8 865	11 775	15 272	19 428	24 314	30 002
60	-	-	-	7 753	10 418	13 635	17 478	22 018	27 327
65	-	-	-	-	9 076	12 008	15 532	19 720	24 644
75	-	-	-	-	-	-	11 692	15 159	19 295

**Power input in W**

35	2 510	3 006	3 954	4 366	4 712	4 970	5 121	5 146	5 023
40	2 547	3 063	4 082	4 545	4 950	5 278	5 509	5 622	5 599
45	2 528	3 071	4 174	4 693	5 164	5 568	5 885	6 094	6 177
50	2 452	3 028	4 227	4 809	5 353	5 840	6 249	6 560	6 754
55	-	-	4 240	4 891	5 515	6 090	6 598	7 017	7 330
60	-	-	-	4 938	5 647	6 317	6 930	7 465	7 902
65	-	-	-	-	5 747	6 520	7 244	7 900	8 468
75	-	-	-	-	-	-	7 809	8 727	9 576

**Current consumption in A**

35	6.68	7.17	8.13	8.55	8.91	9.20	9.39	9.47	9.41
40	6.69	7.21	8.25	8.74	9.18	9.55	9.84	10.03	10.10
45	6.64	7.20	8.35	8.90	9.43	9.90	10.30	10.61	10.82
50	6.54	7.14	8.41	9.04	9.66	10.24	10.75	11.19	11.54
55	-	-	8.43	9.15	9.87	10.55	11.20	11.77	12.27
60	-	-	-	9.22	10.04	10.85	11.63	12.35	13.00
65	-	-	-	-	10.18	11.12	12.03	12.91	13.73
75	-	-	-	-	-	-	12.76	13.97	15.15

**Mass flow in kg/h**

35	95	135	241	310	390	484	592	716	857
40	86	126	231	299	378	471	578	701	840
45	76	115	219	286	365	456	562	683	820
50	66	104	207	273	350	440	544	663	798
55	-	-	193	257	333	422	524	641	774
60	-	-	-	240	315	402	502	617	748
65	-	-	-	-	295	380	478	591	719
75	-	-	-	-	-	-	424	532	655

**Coefficient of performance (C.O.P.)**

35	1.49	1.80	2.56	3.05	3.64	4.37	5.28	6.47	8.05
40	1.26	1.56	2.26	2.69	3.20	3.82	4.57	5.53	6.77
45	1.05	1.35	1.99	2.37	2.81	3.33	3.96	4.74	5.71
50	0.88	1.17	1.75	2.08	2.45	2.90	3.42	4.05	4.84
55	-	-	1.53	1.81	2.14	2.51	2.94	3.46	4.09
60	-	-	-	1.57	1.84	2.16	2.52	2.95	3.46
65	-	-	-	-	1.58	1.84	2.14	2.50	2.91
75	-	-	-	-	-	-	1.50	1.74	2.01

**Nominal performance at to = 5 °C, tc = 50 °C**

Cooling capacity	16 909	W
Power input	5 840	W
Current consumption	10.24	A
Mass flow	440	kg/h
C.O.P.	2.90	

**Pressure switch settings**

Maximum HP switch setting	20.2	bar(g)
Minimum LP switch setting	0.1	bar(g)
LP pump down setting	0.4	bar(g)

**Sound power data**

Sound power level	0	dB(A)
With acoustic hood	0	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

**Performance data at 50 Hz, ARI rating conditions**
**R134a**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-25	-20	-10	-5	0	5	10	15

**Cooling capacity in W**

35	4 056	5 867	10 953	14 379	18 493	23 371	29 086	35 713	43 326
40	3 495	5 218	10 026	13 263	17 156	21 779	27 206	33 514	40 775
45	2 935	4 564	9 082	12 124	15 788	20 150	25 284	31 266	38 170
50	-	3 914	8 130	10 970	14 400	18 495	23 330	28 981	35 522
55	-	-	7 180	9 813	13 002	16 825	21 355	26 669	32 841
60	-	-	-	8 662	11 605	15 149	19 369	24 341	30 140
65	-	-	-	-	-	13 478	17 382	22 007	27 429
75	-	-	-	-	-	-	13 454	17 373	22 031

**Power input in W**

35	2 510	3 006	3 954	4 366	4 712	4 970	5 121	5 146	5 023
40	2 547	3 063	4 082	4 545	4 950	5 278	5 509	5 622	5 599
45	2 528	3 071	4 174	4 693	5 164	5 568	5 885	6 094	6 177
50	-	3 028	4 227	4 809	5 353	5 840	6 249	6 560	6 754
55	-	-	4 240	4 891	5 515	6 090	6 598	7 017	7 330
60	-	-	-	4 938	5 647	6 317	6 930	7 465	7 902
65	-	-	-	-	-	6 520	7 244	7 900	8 468
75	-	-	-	-	-	-	7 809	8 727	9 576

**Current consumption in A**

35	6.68	7.17	8.13	8.55	8.91	9.20	9.39	9.47	9.41
40	6.69	7.21	8.25	8.74	9.18	9.55	9.84	10.03	10.10
45	6.64	7.20	8.35	8.90	9.43	9.90	10.30	10.61	10.82
50	-	7.14	8.41	9.04	9.66	10.24	10.75	11.19	11.54
55	-	-	8.43	9.15	9.87	10.55	11.20	11.77	12.27
60	-	-	-	9.22	10.04	10.85	11.63	12.35	13.00
65	-	-	-	-	-	11.12	12.03	12.91	13.73
75	-	-	-	-	-	-	12.76	13.97	15.15

**Mass flow in kg/h**

35	94	134	240	308	388	482	589	712	852
40	85	125	230	297	377	469	575	697	835
45	76	115	218	285	363	454	559	679	815
50	-	104	206	271	348	438	541	659	794
55	-	-	192	256	331	419	521	637	770
60	-	-	-	239	313	399	499	614	744
65	-	-	-	-	-	378	475	587	715
75	-	-	-	-	-	-	421	529	651

**Coefficient of performance (C.O.P.)**

35	1.62	1.95	2.77	3.29	3.92	4.70	5.68	6.94	8.62
40	1.37	1.70	2.46	2.92	3.47	4.13	4.94	5.96	7.28
45	1.16	1.49	2.18	2.58	3.06	3.62	4.30	5.13	6.18
50	-	1.29	1.92	2.28	2.69	3.17	3.73	4.42	5.26
55	-	-	1.69	2.01	2.36	2.76	3.24	3.80	4.48
60	-	-	-	1.75	2.06	2.40	2.79	3.26	3.81
65	-	-	-	-	-	2.07	2.40	2.79	3.24
75	-	-	-	-	-	-	1.72	1.99	2.30

**Nominal performance at to = 7.2 °C, tc = 54.4 °C**

Cooling capacity	18 943	W
Power input	6 289	W
Current consumption	10.80	A
Mass flow	465	kg/h
C.O.P.	3.01	

**Pressure switch settings**

Maximum HP switch setting	20.2	bar(g)
Minimum LP switch setting	0.1	bar(g)
LP pump down setting	0.4	bar(g)

**Sound power data**

Sound power level	0	dB(A)
With acoustic hood	0	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

Performance data at 50 Hz, EN 12900 rating conditions

R407C

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-15	-10	-5	0	5	10	15	

Cooling capacity in W

35	13 025	17 106	21 947	27 643	34 289	41 980	50 812	-	-
40	11 788	15 658	20 230	25 599	31 861	39 112	47 445	-	-
45	10 525	14 178	18 476	23 514	29 388	36 192	44 022	-	-
50	-	12 676	16 695	21 396	26 876	33 229	40 551	-	-
55	-	-	14 893	19 254	24 335	30 232	37 040	-	-
60	-	-	-	17 094	21 771	27 208	33 498	-	-
65	-	-	-	14 925	19 194	24 164	29 931	-	-

Power input in W

35	5 760	6 328	6 807	7 209	7 548	7 834	8 081	-	-
40	5 986	6 676	7 265	7 766	8 191	8 552	8 861	-	-
45	6 132	6 965	7 686	8 307	8 840	9 297	9 691	-	-
50	-	7 175	8 050	8 813	9 476	10 051	10 550	-	-
55	-	-	8 336	9 262	10 077	10 791	11 418	-	-
60	-	-	-	9 635	10 622	11 498	12 274	-	-
65	-	-	-	9 911	11 093	12 152	13 099	-	-

Current consumption in A

35	10.20	10.99	11.67	12.29	12.91	13.58	14.34	-	-
40	10.49	11.43	12.23	12.93	13.58	14.23	14.94	-	-
45	10.62	11.79	12.76	13.60	14.34	15.03	15.74	-	-
50	-	12.01	13.22	14.25	15.14	15.94	16.70	-	-
55	-	-	13.57	14.85	15.94	16.91	17.79	-	-
60	-	-	-	15.36	16.72	17.91	18.97	-	-
65	-	-	-	15.75	17.44	18.90	20.20	-	-

Mass flow in kg/h

35	283	365	461	571	698	842	1 007	-	-
40	269	351	446	555	680	822	984	-	-
45	254	335	429	537	660	800	959	-	-
50	-	318	410	517	638	776	932	-	-
55	-	-	390	495	614	749	903	-	-
60	-	-	-	470	588	721	871	-	-
65	-	-	-	444	559	689	837	-	-

Coefficient of performance (C.O.P.)

35	2.26	2.70	3.22	3.83	4.54	5.36	6.29	-	-
40	1.97	2.35	2.78	3.30	3.89	4.57	5.35	-	-
45	1.72	2.04	2.40	2.83	3.32	3.89	4.54	-	-
50	-	1.77	2.07	2.43	2.84	3.31	3.84	-	-
55	-	-	1.79	2.08	2.41	2.80	3.24	-	-
60	-	-	-	1.77	2.05	2.37	2.73	-	-
65	-	-	-	1.51	1.73	1.99	2.29	-	-

Nominal performance at to = 5 °C, tc = 50 °C

Cooling capacity	26 876	W
Power input	9 476	W
Current consumption	15.14	A
Mass flow	638	kg/h
C.O.P.	2.84	



to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Pressure switch settings

Maximum HP switch setting	29.4	bar(g)
Minimum LP switch setting	1.4	bar(g)
LP pump down setting	1.7	bar(g)

Sound power data

Sound power level	86	dB(A)
With acoustic hood	80	dB(A)

Tolerance according EN12900



Performance data at 50 Hz, ARI rating conditions

R407C

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-15	-10	-5	0	5	10	15	

Cooling capacity in W

35	14 020	18 390	23 566	29 648	36 737	44 930	54 328	-	-
40	12 758	16 922	21 834	27 595	34 304	42 062	50 967	-	-
45	11 464	15 418	20 062	25 496	31 822	39 139	47 549	-	-
50	-	13 885	18 257	23 361	29 299	36 172	44 082	-	-
55	-	-	16 427	21 197	26 744	33 170	40 576	-	-
60	-	-	-	19 013	24 166	30 142	37 043	-	-
65	-	-	-	16 819	21 577	27 102	33 497	-	-

Power input in W

35	5 760	6 328	6 807	7 209	7 548	7 834	8 081	-	-
40	5 986	6 676	7 265	7 766	8 191	8 552	8 861	-	-
45	6 132	6 965	7 686	8 307	8 840	9 297	9 691	-	-
50	-	7 175	8 050	8 813	9 476	10 051	10 550	-	-
55	-	-	8 336	9 262	10 077	10 791	11 418	-	-
60	-	-	-	9 635	10 622	11 498	12 274	-	-
65	-	-	-	9 911	11 093	12 152	13 099	-	-

Current consumption in A

35	10.20	10.99	11.67	12.29	12.91	13.58	14.34	-	-
40	10.49	11.43	12.23	12.93	13.58	14.23	14.94	-	-
45	10.62	11.79	12.76	13.60	14.34	15.03	15.74	-	-
50	-	12.01	13.22	14.25	15.14	15.94	16.70	-	-
55	-	-	13.57	14.85	15.94	16.91	17.79	-	-
60	-	-	-	15.36	16.72	17.91	18.97	-	-
65	-	-	-	15.75	17.44	18.90	20.20	-	-

Mass flow in kg/h

35	281	363	458	568	694	838	1 000	-	-
40	268	349	443	552	676	817	978	-	-
45	252	333	427	534	656	795	953	-	-
50	-	316	408	514	634	771	926	-	-
55	-	-	388	492	610	745	897	-	-
60	-	-	-	468	584	716	866	-	-
65	-	-	-	441	556	685	832	-	-

Coefficient of performance (C.O.P.)

35	2.43	2.91	3.46	4.11	4.87	5.73	6.72	-	-
40	2.13	2.53	3.01	3.55	4.19	4.92	5.75	-	-
45	1.87	2.21	2.61	3.07	3.60	4.21	4.91	-	-
50	-	1.94	2.27	2.65	3.09	3.60	4.18	-	-
55	-	-	1.97	2.29	2.65	3.07	3.55	-	-
60	-	-	-	1.97	2.27	2.62	3.02	-	-
65	-	-	-	1.70	1.95	2.23	2.56	-	-

Nominal performance at to = 7.2 °C, tc = 54.4 °C

Cooling capacity	29 788	W
Power input	10 325	W
Current consumption	16.28	A
Mass flow	671	kg/h
C.O.P.	2.89	

Pressure switch settings

Maximum HP switch setting	29.4	bar(g)
Minimum LP switch setting	1.4	bar(g)
LP pump down setting	1.7	bar(g)

Sound power data

Sound power level	86	dB(A)
With acoustic hood	80	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

**Performance data at 60 Hz, EN 12900 rating conditions**
**R407C**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-15	-10	-5	0	5	10	15	

**Cooling capacity in W**

35	16 447	21 287	27 031	33 789	41 672	50 792	61 260	-	-
40	14 952	19 495	24 853	31 136	38 454	46 919	56 640	-	-
45	13 454	17 723	22 719	28 551	35 329	43 162	52 163	-	-
50	-	15 952	20 609	26 014	32 275	39 503	47 806	-	-
55	-	-	18 505	23 505	29 274	35 918	43 548	-	-
60	-	-	-	21 006	26 303	32 387	39 365	-	-
65	-	-	-	18 494	23 339	28 883	35 230	-	-

**Power input in W**

35	7 288	8 023	8 677	9 264	9 794	10 278	10 729	-	-
40	7 560	8 406	9 166	9 852	10 475	11 047	11 580	-	-
45	7 785	8 752	9 628	10 425	11 153	11 824	12 450	-	-
50	-	9 067	10 070	10 988	11 832	12 614	13 344	-	-
55	-	-	10 496	11 547	12 518	13 421	14 267	-	-
60	-	-	-	12 107	13 216	14 252	15 225	-	-
65	-	-	-	12 673	13 932	15 111	16 222	-	-

**Current consumption in A**

35	10.67	11.60	12.44	13.17	13.79	14.28	14.63	-	-
40	11.03	12.10	13.05	13.89	14.59	15.14	15.54	-	-
45	11.27	12.55	13.70	14.70	15.56	16.25	16.76	-	-
50	-	12.88	14.29	15.53	16.61	17.51	18.21	-	-
55	-	-	14.74	16.30	17.67	18.84	19.80	-	-
60	-	-	-	16.91	18.64	20.16	21.45	-	-
65	-	-	-	17.29	19.45	21.39	23.08	-	-

**Mass flow in kg/h**

35	357	454	567	698	848	1 020	1 214	-	-
40	341	437	548	675	821	986	1 174	-	-
45	324	419	528	652	793	954	1 136	-	-
50	-	400	507	628	766	922	1 098	-	-
55	-	-	485	604	738	890	1 061	-	-
60	-	-	-	578	710	858	1 024	-	-
65	-	-	-	550	680	824	986	-	-

**Coefficient of performance (C.O.P.)**

35	2.26	2.65	3.12	3.65	4.25	4.94	5.71	-	-
40	1.98	2.32	2.71	3.16	3.67	4.25	4.89	-	-
45	1.73	2.02	2.36	2.74	3.17	3.65	4.19	-	-
50	-	1.76	2.05	2.37	2.73	3.13	3.58	-	-
55	-	-	1.76	2.04	2.34	2.68	3.05	-	-
60	-	-	-	1.73	1.99	2.27	2.59	-	-
65	-	-	-	1.46	1.68	1.91	2.17	-	-

**Nominal performance at to = 5 °C, tc = 50 °C**

Cooling capacity	32 275	W
Power input	11 832	W
Current consumption	16.61	A
Mass flow	766	kg/h
C.O.P.	2.73	

**Pressure switch settings**

Maximum HP switch setting	29.4	bar(g)
Minimum LP switch setting	1.4	bar(g)
LP pump down setting	1.7	bar(g)

**Sound power data**

Sound power level	89	dB(A)
With acoustic hood	83	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

**Performance data at 60 Hz, ARI rating conditions**
**R407C**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-15	-10	-5	0	5	10	15	

**Cooling capacity in W**

35	17 703	22 885	29 025	36 240	44 647	54 361	65 498	-	-
40	16 182	21 070	26 825	33 564	41 402	50 458	60 845	-	-
45	14 653	19 273	24 669	30 957	38 255	46 678	56 342	-	-
50	-	17 474	22 537	28 402	35 185	43 002	51 969	-	-
55	-	-	20 410	25 877	32 172	39 409	47 705	-	-
60	-	-	-	23 364	29 196	35 880	43 532	-	-
65	-	-	-	20 841	26 237	32 394	39 428	-	-

**Power input in W**

35	7 288	8 023	8 677	9 264	9 794	10 278	10 729	-	-
40	7 560	8 406	9 166	9 852	10 475	11 047	11 580	-	-
45	7 785	8 752	9 628	10 425	11 153	11 824	12 450	-	-
50	-	9 067	10 070	10 988	11 832	12 614	13 344	-	-
55	-	-	10 496	11 547	12 518	13 421	14 267	-	-
60	-	-	-	12 107	13 216	14 252	15 225	-	-
65	-	-	-	12 673	13 932	15 111	16 222	-	-

**Current consumption in A**

35	10.67	11.60	12.44	13.17	13.79	14.28	14.63	-	-
40	11.03	12.10	13.05	13.89	14.59	15.14	15.54	-	-
45	11.27	12.55	13.70	14.70	15.56	16.25	16.76	-	-
50	-	12.88	14.29	15.53	16.61	17.51	18.21	-	-
55	-	-	14.74	16.30	17.67	18.84	19.80	-	-
60	-	-	-	16.91	18.64	20.16	21.45	-	-
65	-	-	-	17.29	19.45	21.39	23.08	-	-

**Mass flow in kg/h**

35	355	452	564	694	843	1 013	1 206	-	-
40	339	435	545	671	816	981	1 167	-	-
45	322	417	525	648	789	948	1 129	-	-
50	-	398	504	625	762	917	1 092	-	-
55	-	-	482	600	734	885	1 055	-	-
60	-	-	-	575	706	853	1 018	-	-
65	-	-	-	547	676	819	980	-	-

**Coefficient of performance (C.O.P.)**

35	2.43	2.85	3.34	3.91	4.56	5.29	6.10	-	-
40	2.14	2.51	2.93	3.41	3.95	4.57	5.25	-	-
45	1.88	2.20	2.56	2.97	3.43	3.95	4.53	-	-
50	-	1.93	2.24	2.58	2.97	3.41	3.89	-	-
55	-	-	1.94	2.24	2.57	2.94	3.34	-	-
60	-	-	-	1.93	2.21	2.52	2.86	-	-
65	-	-	-	1.64	1.88	2.14	2.43	-	-

**Nominal performance at to = 7.2 °C, tc = 54.4 °C**

Cooling capacity	35 621	W
Power input	12 834	W
Current consumption	18.07	A
Mass flow	802	kg/h
C.O.P.	2.78	

**Pressure switch settings**

Maximum HP switch setting	29.4	bar(g)
Minimum LP switch setting	1.4	bar(g)
LP pump down setting	1.7	bar(g)

**Sound power data**

Sound power level	89	dB(A)
With acoustic hood	83	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

**Performance data at 60 Hz, EN 12900 rating conditions**
**R134a**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-25	-20	-10	-5	0	5	10	15

**Cooling capacity in W**

35	4 478	6 489	12 156	15 984	20 589	26 059	32 478	39 932	48 509
40	3 836	5 739	11 069	14 669	19 007	24 169	30 240	37 308	45 457
45	3 200	4 987	9 967	13 332	17 395	22 242	27 959	34 632	42 347
50	2 580	4 245	8 861	11 984	15 765	20 291	25 646	31 918	39 191
55	-	-	7 763	10 637	14 130	18 327	23 314	29 177	36 002
60	-	-	-	9 304	12 501	16 362	20 974	26 422	32 792
65	-	-	-	-	10 891	14 409	18 639	23 664	29 572
75	-	-	-	-	-	-	14 030	18 191	23 154

**Power input in W**

35	3 012	3 607	4 744	5 240	5 654	5 964	6 146	6 175	6 028
40	3 057	3 676	4 898	5 454	5 940	6 333	6 610	6 747	6 719
45	3 034	3 686	5 008	5 631	6 197	6 682	7 062	7 313	7 412
50	2 942	3 634	5 072	5 771	6 424	7 008	7 498	7 872	8 105
55	-	-	5 088	5 870	6 618	7 308	7 917	8 421	8 796
60	-	-	-	5 925	6 776	7 581	8 316	8 958	9 482
65	-	-	-	-	6 897	7 824	8 693	9 480	10 162
75	-	-	-	-	-	-	9 371	10 472	11 492

**Current consumption in A**

35	6.97	7.48	8.47	8.92	9.29	9.59	9.79	9.87	9.82
40	6.98	7.52	8.61	9.11	9.57	9.96	10.27	10.46	10.54
45	6.93	7.51	8.71	9.29	9.83	10.32	10.74	11.07	11.28
50	6.82	7.44	8.77	9.43	10.08	10.68	11.21	11.67	12.04
55	-	-	8.79	9.54	10.29	11.01	11.68	12.28	12.80
60	-	-	-	9.61	10.47	11.32	12.12	12.88	13.56
65	-	-	-	-	10.62	11.59	12.55	13.46	14.32
75	-	-	-	-	-	-	13.31	14.57	15.80

**Mass flow in kg/h**

35	113	162	289	372	469	581	711	859	1 028
40	103	151	277	359	454	565	694	841	1 008
45	91	138	263	344	438	548	674	819	984
50	79	125	248	327	420	528	653	796	958
55	-	-	231	309	400	506	629	769	929
60	-	-	-	289	378	482	602	740	898
65	-	-	-	-	354	455	573	709	863
75	-	-	-	-	-	-	508	638	786

**Coefficient of performance (C.O.P.)**

35	1.49	1.80	2.56	3.05	3.64	4.37	5.28	6.47	8.05
40	1.26	1.56	2.26	2.69	3.20	3.82	4.57	5.53	6.77
45	1.05	1.35	1.99	2.37	2.81	3.33	3.96	4.74	5.71
50	0.88	1.17	1.75	2.08	2.45	2.90	3.42	4.05	4.84
55	-	-	1.53	1.81	2.14	2.51	2.94	3.46	4.09
60	-	-	-	1.57	1.84	2.16	2.52	2.95	3.46
65	-	-	-	-	1.58	1.84	2.14	2.50	2.91
75	-	-	-	-	-	-	1.50	1.74	2.01

**Nominal performance at to = 5 °C, tc = 50 °C**

Cooling capacity	20 291	W
Power input	7 008	W
Current consumption	10.68	A
Mass flow	528	kg/h
C.O.P.	2.90	

**Pressure switch settings**

Maximum HP switch setting	20.2	bar(g)
Minimum LP switch setting	0.1	bar(g)
LP pump down setting	0.4	bar(g)

**Sound power data**

Sound power level	0	dB(A)
With acoustic hood	0	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

**Performance data at 60 Hz, ARI rating conditions**
**R134a**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)								
	-25	-20	-10	-5	0	5	10	15	20

**Cooling capacity in W**

35	4 867	7 040	13 143	17 255	22 192	28 045	34 903	42 856	51 991
40	4 195	6 262	12 032	15 916	20 587	26 134	32 648	40 216	48 929
45	3 522	5 476	10 898	14 548	18 945	24 180	30 341	37 519	45 803
50	-	4 697	9 756	13 164	17 280	22 194	27 996	34 777	42 626
55	-	-	8 616	11 775	15 603	20 189	25 626	32 003	39 409
60	-	-	-	10 395	13 926	18 179	23 242	29 209	36 168
65	-	-	-	-	-	16 174	20 859	26 409	32 915
75	-	-	-	-	-	-	16 145	20 848	26 437

**Power input in W**

35	3 012	3 607	4 744	5 240	5 654	5 964	6 146	6 175	6 028
40	3 057	3 676	4 898	5 454	5 940	6 333	6 610	6 747	6 719
45	3 034	3 686	5 008	5 631	6 197	6 682	7 062	7 313	7 412
50	-	3 634	5 072	5 771	6 424	7 008	7 498	7 872	8 105
55	-	-	5 088	5 870	6 618	7 308	7 917	8 421	8 796
60	-	-	-	5 925	6 776	7 581	8 316	8 958	9 482
65	-	-	-	-	-	7 824	8 693	9 480	10 162
75	-	-	-	-	-	-	9 371	10 472	11 492

**Current consumption in A**

35	6.97	7.48	8.47	8.92	9.29	9.59	9.79	9.87	9.82
40	6.98	7.52	8.61	9.11	9.57	9.96	10.27	10.46	10.54
45	6.93	7.51	8.71	9.29	9.83	10.32	10.74	11.07	11.28
50	-	7.44	8.77	9.43	10.08	10.68	11.21	11.67	12.04
55	-	-	8.79	9.54	10.29	11.01	11.68	12.28	12.80
60	-	-	-	9.61	10.47	11.32	12.12	12.88	13.56
65	-	-	-	-	-	11.59	12.55	13.46	14.32
75	-	-	-	-	-	-	13.31	14.57	15.80

**Mass flow in kg/h**

35	113	161	288	370	466	578	707	855	1 022
40	102	150	276	357	452	562	690	836	1 002
45	91	138	262	342	436	545	671	815	979
50	-	125	247	325	418	525	649	791	953
55	-	-	230	307	398	503	625	765	924
60	-	-	-	287	376	479	599	736	893
65	-	-	-	-	-	453	570	705	858
75	-	-	-	-	-	-	506	634	782

**Coefficient of performance (C.O.P.)**

35	1.62	1.95	2.77	3.29	3.92	4.70	5.68	6.94	8.62
40	1.37	1.70	2.46	2.92	3.47	4.13	4.94	5.96	7.28
45	1.16	1.49	2.18	2.58	3.06	3.62	4.30	5.13	6.18
50	-	1.29	1.92	2.28	2.69	3.17	3.73	4.42	5.26
55	-	-	1.69	2.01	2.36	2.76	3.24	3.80	4.48
60	-	-	-	1.75	2.06	2.40	2.79	3.26	3.81
65	-	-	-	-	-	2.07	2.40	2.79	3.24
75	-	-	-	-	-	-	1.72	1.99	2.30

**Nominal performance at to = 7.2 °C, tc = 54.4 °C**

Cooling capacity	22 731	W
Power input	7 547	W
Current consumption	11.26	A
Mass flow	558	kg/h
C.O.P.	3.01	

**Pressure switch settings**

Maximum HP switch setting	20.2	bar(g)
Minimum LP switch setting	0.1	bar(g)
LP pump down setting	0.4	bar(g)

**Sound power data**

Sound power level	0	dB(A)
With acoustic hood	0	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

**Performance data at 60 Hz, EN 12900 rating conditions**
**R404A**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-30	-25	-20	-15	-10	-5	0	5

**Cooling capacity in W**

30	9 352	12 402	16 062	20 414	25 540	31 522	38 440	46 378	55 417
35	8 170	11 045	14 481	18 562	23 368	28 982	35 484	42 956	51 482
40	6 991	9 672	12 867	16 658	21 126	26 353	32 421	39 410	47 404
45	5 824	8 293	11 229	14 712	18 825	23 647	29 262	35 751	43 195
50	4 680	6 919	9 577	12 735	16 473	20 874	26 018	31 987	38 863
55	-	5 560	7 923	10 736	14 082	18 042	22 698	28 129	34 419
60	-	4 227	6 275	8 727	11 662	15 164	19 311	24 187	29 872

**Power input in W**

30	6 438	7 204	7 897	8 507	9 023	9 437	9 738	9 915	9 960
35	6 472	7 347	8 158	8 894	9 546	10 102	10 555	10 892	11 106
40	6 455	7 442	8 373	9 237	10 026	10 728	11 334	11 835	12 218
45	6 369	7 470	8 523	9 518	10 446	11 296	12 059	12 724	13 281
50	6 197	7 414	8 591	9 720	10 790	11 790	12 711	13 543	14 276
55	-	7 256	8 560	9 825	11 038	12 191	13 273	14 274	15 185
60	-	6 978	8 412	9 814	11 174	12 481	13 726	14 899	15 990

**Current consumption in A**

30	9.64	10.51	11.28	11.97	12.62	13.26	13.92	14.62	15.42
35	9.70	10.73	11.64	12.47	13.24	14.00	14.76	15.57	16.45
40	9.65	10.85	11.92	12.90	13.81	14.69	15.57	16.49	17.48
45	9.48	10.86	12.10	13.24	14.31	15.33	16.35	17.40	18.50
50	9.18	10.76	12.19	13.50	14.73	15.92	17.09	18.27	19.50
55	-	10.53	12.16	13.67	15.08	16.44	17.77	19.10	20.48
60	-	10.18	12.02	13.73	15.34	16.89	18.39	19.90	21.43

**Mass flow in kg/h**

30	294	382	482	597	729	878	1 048	1 240	1 456
35	277	364	465	580	711	860	1 029	1 220	1 435
40	257	345	445	560	691	839	1 007	1 197	1 410
45	235	323	423	537	667	815	982	1 170	1 382
50	210	298	397	511	640	787	953	1 140	1 350
55	-	270	369	482	610	756	920	1 106	1 314
60	-	238	337	449	576	720	883	1 067	1 273

**Coefficient of performance (C.O.P.)**

30	1.45	1.72	2.03	2.40	2.83	3.34	3.95	4.68	5.56
35	1.26	1.50	1.78	2.09	2.45	2.87	3.36	3.94	4.64
40	1.08	1.30	1.54	1.80	2.11	2.46	2.86	3.33	3.88
45	0.91	1.11	1.32	1.55	1.80	2.09	2.43	2.81	3.25
50	0.76	0.93	1.11	1.31	1.53	1.77	2.05	2.36	2.72
55	-	0.77	0.93	1.09	1.28	1.48	1.71	1.97	2.27
60	-	0.61	0.75	0.89	1.04	1.21	1.41	1.62	1.87

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	18 825	W
Power input	10 446	W
Current consumption	14.31	A
Mass flow	667	kg/h
C.O.P.	1.80	

**Pressure switch settings**

Maximum HP switch setting	27.7	bar(g)
Minimum LP switch setting	1	bar(g)
LP pump down setting	1.3	bar(g)

**Sound power data**

Sound power level	87	dB(A)
With acoustic hood	81	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

**Performance data at 60 Hz, ARI rating conditions**
**R404A**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-30	-25	-20	-15	-10	-5	0	5

**Cooling capacity in W**

30	10 411	13 768	17 785	22 550	28 147	34 663	42 184	50 794	60 581
35	9 193	12 387	16 193	20 698	25 988	32 149	39 269	47 432	56 726
40	7 970	10 984	14 561	18 789	23 754	29 544	36 246	43 947	52 732
45	6 750	9 568	12 899	16 833	21 458	26 861	33 130	40 353	48 616
50	5 544	8 149	11 219	14 844	19 113	24 116	29 939	36 672	44 403
55	-	6 738	9 533	12 837	16 739	21 330	26 699	32 936	40 128
60	-	5 344	7 858	10 833	14 363	18 539	23 454	29 197	35 859

**Power input in W**

30	6 438	7 204	7 897	8 507	9 023	9 437	9 738	9 915	9 960
35	6 472	7 347	8 158	8 894	9 546	10 102	10 555	10 892	11 106
40	6 455	7 442	8 373	9 237	10 026	10 728	11 334	11 835	12 218
45	6 369	7 470	8 523	9 518	10 446	11 296	12 059	12 724	13 281
50	6 197	7 414	8 591	9 720	10 790	11 790	12 711	13 543	14 276
55	-	7 256	8 560	9 825	11 038	12 191	13 273	14 274	15 185
60	-	6 978	8 412	9 814	11 174	12 481	13 726	14 899	15 990

**Current consumption in A**

30	9.64	10.51	11.28	11.97	12.62	13.26	13.92	14.62	15.42
35	9.70	10.73	11.64	12.47	13.24	14.00	14.76	15.57	16.45
40	9.65	10.85	11.92	12.90	13.81	14.69	15.57	16.49	17.48
45	9.48	10.86	12.10	13.24	14.31	15.33	16.35	17.40	18.50
50	9.18	10.76	12.19	13.50	14.73	15.92	17.09	18.27	19.50
55	-	10.53	12.16	13.67	15.08	16.44	17.77	19.10	20.48
60	-	10.18	12.02	13.73	15.34	16.89	18.39	19.90	21.43

**Mass flow in kg/h**

30	292	379	479	594	724	873	1 042	1 232	1 446
35	275	362	462	577	707	855	1 023	1 212	1 425
40	255	343	443	557	687	834	1 001	1 189	1 401
45	233	321	420	534	663	810	976	1 163	1 373
50	209	296	395	508	637	782	947	1 133	1 341
55	-	268	367	479	606	751	914	1 098	1 305
60	-	237	335	446	573	716	878	1 060	1 265

**Coefficient of performance (C.O.P.)**

30	1.62	1.91	2.25	2.65	3.12	3.67	4.33	5.12	6.08
35	1.42	1.69	1.98	2.33	2.72	3.18	3.72	4.35	5.11
40	1.23	1.48	1.74	2.03	2.37	2.75	3.20	3.71	4.32
45	1.06	1.28	1.51	1.77	2.05	2.38	2.75	3.17	3.66
50	0.89	1.10	1.31	1.53	1.77	2.05	2.36	2.71	3.11
55	-	0.93	1.11	1.31	1.52	1.75	2.01	2.31	2.64
60	-	0.77	0.93	1.10	1.29	1.49	1.71	1.96	2.24

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	21 458	W
Power input	10 446	W
Current consumption	14.31	A
Mass flow	663	kg/h
C.O.P.	2.05	

**Pressure switch settings**

Maximum HP switch setting	27.7	bar(g)
Minimum LP switch setting	1	bar(g)
LP pump down setting	1.3	bar(g)

**Sound power data**

Sound power level	87	dB(A)
With acoustic hood	81	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

**Performance data at 60 Hz, EN 12900 rating conditions**
**R407A**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-30	-25	-20	-15	-10	-5	0	5

**Cooling capacity in W**

30	6 467	9 466	13 176	17 690	23 103	29 509	37 001	45 673	55 619
35	5 524	8 333	11 807	16 040	21 127	27 160	34 235	42 444	51 883
40	4 614	7 225	10 455	14 399	19 151	24 805	31 454	39 194	48 116
45	3 751	6 155	9 134	12 781	17 191	22 457	28 673	35 934	44 333
50	-	5 137	7 856	11 199	15 259	20 129	25 905	32 679	40 547
55	-	-	6 637	9 667	13 368	17 836	23 163	29 443	36 771
60	-	-	-	8 198	11 533	15 590	20 460	26 238	33 019

**Power input in W**

30	4 600	5 432	6 219	6 946	7 598	8 161	8 621	8 962	9 171
35	4 572	5 488	6 370	7 202	7 972	8 664	9 264	9 756	10 128
40	4 498	5 499	6 477	7 417	8 305	9 127	9 867	10 513	11 048
45	4 385	5 471	6 546	7 594	8 602	9 554	10 437	11 236	11 936
50	-	5 409	6 581	7 739	8 867	9 951	10 977	11 930	12 796
55	-	-	6 589	7 856	9 106	10 323	11 493	12 602	13 634
60	-	-	-	7 951	9 324	10 674	11 990	13 255	14 455

**Current consumption in A**

30	8.82	9.61	10.40	11.16	11.86	12.47	12.96	13.30	13.45
35	8.89	9.71	10.56	11.41	12.22	12.96	13.60	14.11	14.47
40	8.94	9.81	10.72	11.66	12.58	13.46	14.27	14.96	15.53
45	8.96	9.87	10.86	11.89	12.94	13.96	14.93	15.82	16.60
50	-	9.89	10.96	12.09	13.26	14.44	15.59	16.68	17.68
55	-	-	10.99	12.24	13.54	14.88	16.21	17.50	18.73
60	-	-	-	12.31	13.76	15.25	16.77	18.28	19.74

**Mass flow in kg/h**

30	154	221	302	398	510	640	790	961	1 156
35	138	205	285	379	490	619	768	937	1 130
40	123	188	267	360	469	596	743	911	1 102
45	107	170	247	339	446	572	717	883	1 072
50	-	152	227	317	423	546	689	853	1 039
55	-	-	207	294	398	519	660	821	1 005
60	-	-	-	271	372	491	629	788	970

**Coefficient of performance (C.O.P.)**

30	1.41	1.74	2.12	2.55	3.04	3.62	4.29	5.10	6.06
35	1.21	1.52	1.85	2.23	2.65	3.13	3.70	4.35	5.12
40	1.03	1.31	1.61	1.94	2.31	2.72	3.19	3.73	4.36
45	0.86	1.12	1.40	1.68	2.00	2.35	2.75	3.20	3.71
50	-	0.95	1.19	1.45	1.72	2.02	2.36	2.74	3.17
55	-	-	1.01	1.23	1.47	1.73	2.02	2.34	2.70
60	-	-	-	1.03	1.24	1.46	1.71	1.98	2.28

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	17 191	W
Power input	8 602	W
Current consumption	12.94	A
Mass flow	446	kg/h
C.O.P.	2.00	

**Pressure switch settings**

Maximum HP switch setting	25.8	bar(g)
Minimum LP switch setting	0.9	bar(g)
LP pump down setting	1.2	bar(g)

**Sound power data**

Sound power level	86	dB(A)
With acoustic hood	80	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900



**Performance data at 60 Hz, ARI rating conditions**
**R407A**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-30	-25	-20	-15	-10	-5	0	5

**Cooling capacity in W**

30	6 995	10 223	14 209	19 052	24 850	31 700	39 701	48 951	59 546
35	6 010	9 051	12 804	17 368	22 843	29 326	36 917	45 712	55 810
40	5 055	7 900	11 411	15 689	20 833	26 942	34 114	42 448	52 042
45	4 143	6 784	10 046	14 030	18 835	24 562	31 309	39 175	48 259
50	-	5 717	8 722	12 404	16 864	22 202	28 518	35 910	44 479
55	-	-	7 454	10 827	14 935	19 879	25 758	32 673	40 723
60	-	-	-	9 316	13 066	17 610	23 050	29 486	37 018

**Power input in W**

30	4 600	5 432	6 219	6 946	7 598	8 161	8 621	8 962	9 171
35	4 572	5 488	6 370	7 202	7 972	8 664	9 264	9 756	10 128
40	4 498	5 499	6 477	7 417	8 305	9 127	9 867	10 513	11 048
45	4 385	5 471	6 546	7 594	8 602	9 554	10 437	11 236	11 936
50	-	5 409	6 581	7 739	8 867	9 951	10 977	11 930	12 796
55	-	-	6 589	7 856	9 106	10 323	11 493	12 602	13 634
60	-	-	-	7 951	9 324	10 674	11 990	13 255	14 455

**Current consumption in A**

30	8.82	9.61	10.40	11.16	11.86	12.47	12.96	13.30	13.45
35	8.89	9.71	10.56	11.41	12.22	12.96	13.60	14.11	14.47
40	8.94	9.81	10.72	11.66	12.58	13.46	14.27	14.96	15.53
45	8.96	9.87	10.86	11.89	12.94	13.96	14.93	15.82	16.60
50	-	9.89	10.96	12.09	13.26	14.44	15.59	16.68	17.68
55	-	-	10.99	12.24	13.54	14.88	16.21	17.50	18.73
60	-	-	-	12.31	13.76	15.25	16.77	18.28	19.74

**Mass flow in kg/h**

30	153	220	301	396	507	637	786	956	1 149
35	138	204	283	377	488	616	763	932	1 123
40	122	187	265	358	466	593	739	906	1 095
45	106	170	246	337	444	569	713	878	1 065
50	-	152	226	315	420	543	685	848	1 033
55	-	-	206	293	396	516	656	816	999
60	-	-	-	270	370	488	625	783	964

**Coefficient of performance (C.O.P.)**

30	1.52	1.88	2.28	2.74	3.27	3.88	4.61	5.46	6.49
35	1.31	1.65	2.01	2.41	2.87	3.38	3.99	4.69	5.51
40	1.12	1.44	1.76	2.12	2.51	2.95	3.46	4.04	4.71
45	0.94	1.24	1.53	1.85	2.19	2.57	3.00	3.49	4.04
50	-	1.06	1.33	1.60	1.90	2.23	2.60	3.01	3.48
55	-	-	1.13	1.38	1.64	1.93	2.24	2.59	2.99
60	-	-	-	1.17	1.40	1.65	1.92	2.22	2.56

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	18 835	W
Power input	8 602	W
Current consumption	12.94	A
Mass flow	444	kg/h
C.O.P.	2.19	

**Pressure switch settings**

Maximum HP switch setting	25.8	bar(g)
Minimum LP switch setting	0.9	bar(g)
LP pump down setting	1.2	bar(g)

**Sound power data**

Sound power level	86	dB(A)
With acoustic hood	80	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

**Performance data at 60 Hz, EN 12900 rating conditions**
**R407F**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)								
	-30	-25	-20	-15	-10	-5	0	5	10

**Cooling capacity in W**

30	-	10 292	14 471	19 564	25 682	32 938	41 444	51 312	62 656
35	-	8 825	12 601	17 213	22 772	29 392	37 184	46 261	56 736
40	-	7 620	11 056	15 250	20 315	26 362	33 503	41 852	51 521
45	-	6 627	9 787	13 627	18 259	23 796	30 351	38 035	46 962
50	-	-	8 742	12 291	16 555	21 646	27 676	34 759	43 006
55	-	-	-	11 192	15 151	19 859	25 429	31 974	39 605
60	-	-	-	-	-	-	-	-	-

**Power input in W**

30	-	5 782	6 582	7 339	8 013	8 566	8 956	9 145	9 091
35	-	5 867	6 740	7 601	8 408	9 123	9 705	10 114	10 310
40	-	5 957	6 888	7 835	8 759	9 620	10 376	10 990	11 420
45	-	6 083	7 055	8 073	9 097	10 087	11 002	11 804	12 452
50	-	-	7 272	8 345	9 452	10 555	11 613	12 586	13 435
55	-	-	-	8 680	9 854	11 054	12 238	13 366	14 400
60	-	-	-	-	-	-	-	-	-

**Current consumption in A**

30	-	9.62	10.46	11.28	12.04	12.68	13.15	13.42	13.44
35	-	9.84	10.74	11.64	12.51	13.29	13.94	14.41	14.66
40	-	9.98	10.94	11.93	12.92	13.85	14.68	15.37	15.86
45	-	10.07	11.09	12.18	13.30	14.39	15.41	16.32	17.06
50	-	-	11.25	12.44	13.70	14.95	16.17	17.31	18.31
55	-	-	-	12.75	14.15	15.58	17.01	18.38	19.64
60	-	-	-	-	-	-	-	-	-

**Mass flow in kg/h**

30	-	212	295	392	508	642	798	976	1 179
35	-	191	269	362	471	599	748	918	1 113
40	-	174	248	336	441	564	706	871	1 058
45	-	160	232	317	418	536	674	832	1 014
50	-	-	220	303	401	517	650	804	980
55	-	-	-	295	392	504	635	785	957
60	-	-	-	-	-	-	-	-	-

**Coefficient of performance (C.O.P.)**

30	-	1.78	2.20	2.67	3.20	3.85	4.63	5.61	6.89
35	-	1.50	1.87	2.26	2.71	3.22	3.83	4.57	5.50
40	-	1.28	1.61	1.95	2.32	2.74	3.23	3.81	4.51
45	-	1.09	1.39	1.69	2.01	2.36	2.76	3.22	3.77
50	-	-	1.20	1.47	1.75	2.05	2.38	2.76	3.20
55	-	-	-	1.29	1.54	1.80	2.08	2.39	2.75
60	-	-	-	-	-	-	-	-	-

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	18 259	W
Power input	9 097	W
Current consumption	13.30	A
Mass flow	418	kg/h
C.O.P.	2.01	

**Pressure switch settings**

Maximum HP switch setting	24	bar(g)
Minimum LP switch setting	1	bar(g)
LP pump down setting	1.26	bar(g)

**Sound power data**

Sound power level	86	dB(A)
With acoustic hood	80	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

**Performance data at 60 Hz, ARI rating conditions**
**R407F**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)								
	-30	-25	-20	-15	-10	-5	0	5	10

**Cooling capacity in W**

30	-	11 031	15 494	20 926	27 443	35 163	44 205	54 684	66 718
35	-	9 502	13 553	18 492	24 439	31 511	39 826	49 502	60 656
40	-	8 249	11 954	16 469	21 911	28 401	36 056	44 995	55 335
45	-	7 220	10 648	14 805	19 811	25 786	32 849	41 118	50 713
50	-	-	9 583	13 452	18 091	23 621	30 160	37 830	46 747
55	-	-	-	12 365	16 708	21 864	27 952	35 093	43 407
60	-	-	-	-	-	-	-	-	-

**Power input in W**

30	-	5 782	6 582	7 339	8 013	8 566	8 956	9 145	9 091
35	-	5 867	6 740	7 601	8 408	9 123	9 705	10 114	10 310
40	-	5 957	6 888	7 835	8 759	9 620	10 376	10 990	11 420
45	-	6 083	7 055	8 073	9 097	10 087	11 002	11 804	12 452
50	-	-	7 272	8 345	9 452	10 555	11 613	12 586	13 435
55	-	-	-	8 680	9 854	11 054	12 238	13 366	14 400
60	-	-	-	-	-	-	-	-	-

**Current consumption in A**

30	-	9.62	10.46	11.28	12.04	12.68	13.15	13.42	13.44
35	-	9.84	10.74	11.64	12.51	13.29	13.94	14.41	14.66
40	-	9.98	10.94	11.93	12.92	13.85	14.68	15.37	15.86
45	-	10.07	11.09	12.18	13.30	14.39	15.41	16.32	17.06
50	-	-	11.25	12.44	13.70	14.95	16.17	17.31	18.31
55	-	-	-	12.75	14.15	15.58	17.01	18.38	19.64
60	-	-	-	-	-	-	-	-	-

**Mass flow in kg/h**

30	-	211	293	390	505	638	793	970	1 172
35	-	190	267	360	468	596	743	913	1 106
40	-	173	247	335	439	561	702	865	1 051
45	-	159	230	315	416	533	670	827	1 007
50	-	-	219	301	399	513	646	799	974
55	-	-	-	293	389	501	631	780	951
60	-	-	-	-	-	-	-	-	-

**Coefficient of performance (C.O.P.)**

30	-	1.91	2.35	2.85	3.42	4.11	4.94	5.98	7.34
35	-	1.62	2.01	2.43	2.91	3.45	4.10	4.89	5.88
40	-	1.38	1.74	2.10	2.50	2.95	3.47	4.09	4.85
45	-	1.19	1.51	1.83	2.18	2.56	2.99	3.48	4.07
50	-	-	1.32	1.61	1.91	2.24	2.60	3.01	3.48
55	-	-	-	1.42	1.70	1.98	2.28	2.63	3.01
60	-	-	-	-	-	-	-	-	-

**Nominal performance at to = -10 °C, tc = 45 °C**

Cooling capacity	19 811	W
Power input	9 097	W
Current consumption	13.30	A
Mass flow	416	kg/h
C.O.P.	2.18	

**Pressure switch settings**

Maximum HP switch setting	24	bar(g)
Minimum LP switch setting	1	bar(g)
LP pump down setting	1.26	bar(g)

**Sound power data**

Sound power level	86	dB(A)
With acoustic hood	80	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

**Performance data at 60 Hz, EN 12900 rating conditions**
**R134a**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-25	-20	-10	-5	0	5	10	15

**Cooling capacity in W**

35	4 478	6 489	12 156	15 984	20 589	26 059	32 478	39 932	48 509
40	3 836	5 739	11 069	14 669	19 007	24 169	30 240	37 308	45 457
45	3 200	4 987	9 967	13 332	17 395	22 242	27 959	34 632	42 347
50	2 580	4 245	8 861	11 984	15 765	20 291	25 646	31 918	39 191
55	-	-	7 763	10 637	14 130	18 327	23 314	29 177	36 002
60	-	-	-	9 304	12 501	16 362	20 974	26 422	32 792
65	-	-	-	-	10 891	14 409	18 639	23 664	29 572
75	-	-	-	-	-	-	14 030	18 191	23 154

**Power input in W**

35	3 012	3 607	4 744	5 240	5 654	5 964	6 146	6 175	6 028
40	3 057	3 676	4 898	5 454	5 940	6 333	6 610	6 747	6 719
45	3 034	3 686	5 008	5 631	6 197	6 682	7 062	7 313	7 412
50	2 942	3 634	5 072	5 771	6 424	7 008	7 498	7 872	8 105
55	-	-	5 088	5 870	6 618	7 308	7 917	8 421	8 796
60	-	-	-	5 925	6 776	7 581	8 316	8 958	9 482
65	-	-	-	-	6 897	7 824	8 693	9 480	10 162
75	-	-	-	-	-	-	9 371	10 472	11 492

**Current consumption in A**

35	6.97	7.48	8.47	8.92	9.29	9.59	9.79	9.87	9.82
40	6.98	7.52	8.61	9.11	9.57	9.96	10.27	10.46	10.54
45	6.93	7.51	8.71	9.29	9.83	10.32	10.74	11.07	11.28
50	6.82	7.44	8.77	9.43	10.08	10.68	11.21	11.67	12.04
55	-	-	8.79	9.54	10.29	11.01	11.68	12.28	12.80
60	-	-	-	9.61	10.47	11.32	12.12	12.88	13.56
65	-	-	-	-	10.62	11.59	12.55	13.46	14.32
75	-	-	-	-	-	-	13.31	14.57	15.80

**Mass flow in kg/h**

35	113	162	289	372	469	581	711	859	1 028
40	103	151	277	359	454	565	694	841	1 008
45	91	138	263	344	438	548	674	819	984
50	79	125	248	327	420	528	653	796	958
55	-	-	231	309	400	506	629	769	929
60	-	-	-	289	378	482	602	740	898
65	-	-	-	-	354	455	573	709	863
75	-	-	-	-	-	-	508	638	786

**Coefficient of performance (C.O.P.)**

35	1.49	1.80	2.56	3.05	3.64	4.37	5.28	6.47	8.05
40	1.26	1.56	2.26	2.69	3.20	3.82	4.57	5.53	6.77
45	1.05	1.35	1.99	2.37	2.81	3.33	3.96	4.74	5.71
50	0.88	1.17	1.75	2.08	2.45	2.90	3.42	4.05	4.84
55	-	-	1.53	1.81	2.14	2.51	2.94	3.46	4.09
60	-	-	-	1.57	1.84	2.16	2.52	2.95	3.46
65	-	-	-	-	1.58	1.84	2.14	2.50	2.91
75	-	-	-	-	-	-	1.50	1.74	2.01

**Nominal performance at to = 5 °C, tc = 50 °C**

Cooling capacity	20 291	W
Power input	7 008	W
Current consumption	10.68	A
Mass flow	528	kg/h
C.O.P.	2.90	

**Pressure switch settings**

Maximum HP switch setting	20.2	bar(g)
Minimum LP switch setting	0.1	bar(g)
LP pump down setting	0.4	bar(g)

**Sound power data**

Sound power level	0	dB(A)
With acoustic hood	0	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

**Performance data at 60 Hz, ARI rating conditions**
**R134a**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)								
	-25	-20	-10	-5	0	5	10	15	20

**Cooling capacity in W**

35	4 867	7 040	13 143	17 255	22 192	28 045	34 903	42 856	51 991
40	4 195	6 262	12 032	15 916	20 587	26 134	32 648	40 216	48 929
45	3 522	5 476	10 898	14 548	18 945	24 180	30 341	37 519	45 803
50	-	4 697	9 756	13 164	17 280	22 194	27 996	34 777	42 626
55	-	-	8 616	11 775	15 603	20 189	25 626	32 003	39 409
60	-	-	-	10 395	13 926	18 179	23 242	29 209	36 168
65	-	-	-	-	-	16 174	20 859	26 409	32 915
75	-	-	-	-	-	-	16 145	20 848	26 437

**Power input in W**

35	3 012	3 607	4 744	5 240	5 654	5 964	6 146	6 175	6 028
40	3 057	3 676	4 898	5 454	5 940	6 333	6 610	6 747	6 719
45	3 034	3 686	5 008	5 631	6 197	6 682	7 062	7 313	7 412
50	-	3 634	5 072	5 771	6 424	7 008	7 498	7 872	8 105
55	-	-	5 088	5 870	6 618	7 308	7 917	8 421	8 796
60	-	-	-	5 925	6 776	7 581	8 316	8 958	9 482
65	-	-	-	-	-	7 824	8 693	9 480	10 162
75	-	-	-	-	-	-	9 371	10 472	11 492

**Current consumption in A**

35	6.97	7.48	8.47	8.92	9.29	9.59	9.79	9.87	9.82
40	6.98	7.52	8.61	9.11	9.57	9.96	10.27	10.46	10.54
45	6.93	7.51	8.71	9.29	9.83	10.32	10.74	11.07	11.28
50	-	7.44	8.77	9.43	10.08	10.68	11.21	11.67	12.04
55	-	-	8.79	9.54	10.29	11.01	11.68	12.28	12.80
60	-	-	-	9.61	10.47	11.32	12.12	12.88	13.56
65	-	-	-	-	-	11.59	12.55	13.46	14.32
75	-	-	-	-	-	-	13.31	14.57	15.80

**Mass flow in kg/h**

35	113	161	288	370	466	578	707	855	1 022
40	102	150	276	357	452	562	690	836	1 002
45	91	138	262	342	436	545	671	815	979
50	-	125	247	325	418	525	649	791	953
55	-	-	230	307	398	503	625	765	924
60	-	-	-	287	376	479	599	736	893
65	-	-	-	-	-	453	570	705	858
75	-	-	-	-	-	-	506	634	782

**Coefficient of performance (C.O.P.)**

35	1.62	1.95	2.77	3.29	3.92	4.70	5.68	6.94	8.62
40	1.37	1.70	2.46	2.92	3.47	4.13	4.94	5.96	7.28
45	1.16	1.49	2.18	2.58	3.06	3.62	4.30	5.13	6.18
50	-	1.29	1.92	2.28	2.69	3.17	3.73	4.42	5.26
55	-	-	1.69	2.01	2.36	2.76	3.24	3.80	4.48
60	-	-	-	1.75	2.06	2.40	2.79	3.26	3.81
65	-	-	-	-	-	2.07	2.40	2.79	3.24
75	-	-	-	-	-	-	1.72	1.99	2.30

**Nominal performance at to = 7.2 °C, tc = 54.4 °C**

Cooling capacity	22 731	W
Power input	7 547	W
Current consumption	11.26	A
Mass flow	558	kg/h
C.O.P.	3.01	

**Pressure switch settings**

Maximum HP switch setting	20.2	bar(g)
Minimum LP switch setting	0.1	bar(g)
LP pump down setting	0.4	bar(g)

**Sound power data**

Sound power level	0	dB(A)
With acoustic hood	0	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alternations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.

**Performance data at 60 Hz, EN 12900 rating conditions**
**R407C**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-15	-10	-5	0	5	10	15	

**Cooling capacity in W**

35	16 447	21 287	27 031	33 789	41 672	50 792	61 260	-	-
40	14 952	19 495	24 853	31 136	38 454	46 919	56 640	-	-
45	13 454	17 723	22 719	28 551	35 329	43 162	52 163	-	-
50	-	15 952	20 609	26 014	32 275	39 503	47 806	-	-
55	-	-	18 505	23 505	29 274	35 918	43 548	-	-
60	-	-	-	21 006	26 303	32 387	39 365	-	-
65	-	-	-	18 494	23 339	28 883	35 230	-	-

**Power input in W**

35	7 288	8 023	8 677	9 264	9 794	10 278	10 729	-	-
40	7 560	8 406	9 166	9 852	10 475	11 047	11 580	-	-
45	7 785	8 752	9 628	10 425	11 153	11 824	12 450	-	-
50	-	9 067	10 070	10 988	11 832	12 614	13 344	-	-
55	-	-	10 496	11 547	12 518	13 421	14 267	-	-
60	-	-	-	12 107	13 216	14 252	15 225	-	-
65	-	-	-	12 673	13 932	15 111	16 222	-	-

**Current consumption in A**

35	10.67	11.60	12.44	13.17	13.79	14.28	14.63	-	-
40	11.03	12.10	13.05	13.89	14.59	15.14	15.54	-	-
45	11.27	12.55	13.70	14.70	15.56	16.25	16.76	-	-
50	-	12.88	14.29	15.53	16.61	17.51	18.21	-	-
55	-	-	14.74	16.30	17.67	18.84	19.80	-	-
60	-	-	-	16.91	18.64	20.16	21.45	-	-
65	-	-	-	17.29	19.45	21.39	23.08	-	-

**Mass flow in kg/h**

35	357	454	567	698	848	1 020	1 214	-	-
40	341	437	548	675	821	986	1 174	-	-
45	324	419	528	652	793	954	1 136	-	-
50	-	400	507	628	766	922	1 098	-	-
55	-	-	485	604	738	890	1 061	-	-
60	-	-	-	578	710	858	1 024	-	-
65	-	-	-	550	680	824	986	-	-

**Coefficient of performance (C.O.P.)**

35	2.26	2.65	3.12	3.65	4.25	4.94	5.71	-	-
40	1.98	2.32	2.71	3.16	3.67	4.25	4.89	-	-
45	1.73	2.02	2.36	2.74	3.17	3.65	4.19	-	-
50	-	1.76	2.05	2.37	2.73	3.13	3.58	-	-
55	-	-	1.76	2.04	2.34	2.68	3.05	-	-
60	-	-	-	1.73	1.99	2.27	2.59	-	-
65	-	-	-	1.46	1.68	1.91	2.17	-	-

**Nominal performance at to = 5 °C, tc = 50 °C**

Cooling capacity	32 275	W
Power input	11 832	W
Current consumption	16.61	A
Mass flow	766	kg/h
C.O.P.	2.73	

**Pressure switch settings**

Maximum HP switch setting	29.4	bar(g)
Minimum LP switch setting	1.4	bar(g)
LP pump down setting	1.7	bar(g)

**Sound power data**

Sound power level	89	dB(A)
With acoustic hood	83	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 10 K , Subcooling = 0 K

Tolerance according EN12900

**Performance data at 60 Hz, ARI rating conditions**
**R407C**

Cond. temp. in °C (tc)	Evaporating temperature in °C (to)							
	-15	-10	-5	0	5	10	15	

**Cooling capacity in W**

35	17 703	22 885	29 025	36 240	44 647	54 361	65 498	-	-
40	16 182	21 070	26 825	33 564	41 402	50 458	60 845	-	-
45	14 653	19 273	24 669	30 957	38 255	46 678	56 342	-	-
50	-	17 474	22 537	28 402	35 185	43 002	51 969	-	-
55	-	-	20 410	25 877	32 172	39 409	47 705	-	-
60	-	-	-	23 364	29 196	35 880	43 532	-	-
65	-	-	-	20 841	26 237	32 394	39 428	-	-

**Power input in W**

35	7 288	8 023	8 677	9 264	9 794	10 278	10 729	-	-
40	7 560	8 406	9 166	9 852	10 475	11 047	11 580	-	-
45	7 785	8 752	9 628	10 425	11 153	11 824	12 450	-	-
50	-	9 067	10 070	10 988	11 832	12 614	13 344	-	-
55	-	-	10 496	11 547	12 518	13 421	14 267	-	-
60	-	-	-	12 107	13 216	14 252	15 225	-	-
65	-	-	-	12 673	13 932	15 111	16 222	-	-

**Current consumption in A**

35	10.67	11.60	12.44	13.17	13.79	14.28	14.63	-	-
40	11.03	12.10	13.05	13.89	14.59	15.14	15.54	-	-
45	11.27	12.55	13.70	14.70	15.56	16.25	16.76	-	-
50	-	12.88	14.29	15.53	16.61	17.51	18.21	-	-
55	-	-	14.74	16.30	17.67	18.84	19.80	-	-
60	-	-	-	16.91	18.64	20.16	21.45	-	-
65	-	-	-	17.29	19.45	21.39	23.08	-	-

**Mass flow in kg/h**

35	355	452	564	694	843	1 013	1 206	-	-
40	339	435	545	671	816	981	1 167	-	-
45	322	417	525	648	789	948	1 129	-	-
50	-	398	504	625	762	917	1 092	-	-
55	-	-	482	600	734	885	1 055	-	-
60	-	-	-	575	706	853	1 018	-	-
65	-	-	-	547	676	819	980	-	-

**Coefficient of performance (C.O.P.)**

35	2.43	2.85	3.34	3.91	4.56	5.29	6.10	-	-
40	2.14	2.51	2.93	3.41	3.95	4.57	5.25	-	-
45	1.88	2.20	2.56	2.97	3.43	3.95	4.53	-	-
50	-	1.93	2.24	2.58	2.97	3.41	3.89	-	-
55	-	-	1.94	2.24	2.57	2.94	3.34	-	-
60	-	-	-	1.93	2.21	2.52	2.86	-	-
65	-	-	-	1.64	1.88	2.14	2.43	-	-

**Nominal performance at to = 7.2 °C, tc = 54.4 °C**

Cooling capacity	35 621	W
Power input	12 834	W
Current consumption	18.07	A
Mass flow	802	kg/h
C.O.P.	2.78	

**Pressure switch settings**

Maximum HP switch setting	29.4	bar(g)
Minimum LP switch setting	1.4	bar(g)
LP pump down setting	1.7	bar(g)

**Sound power data**

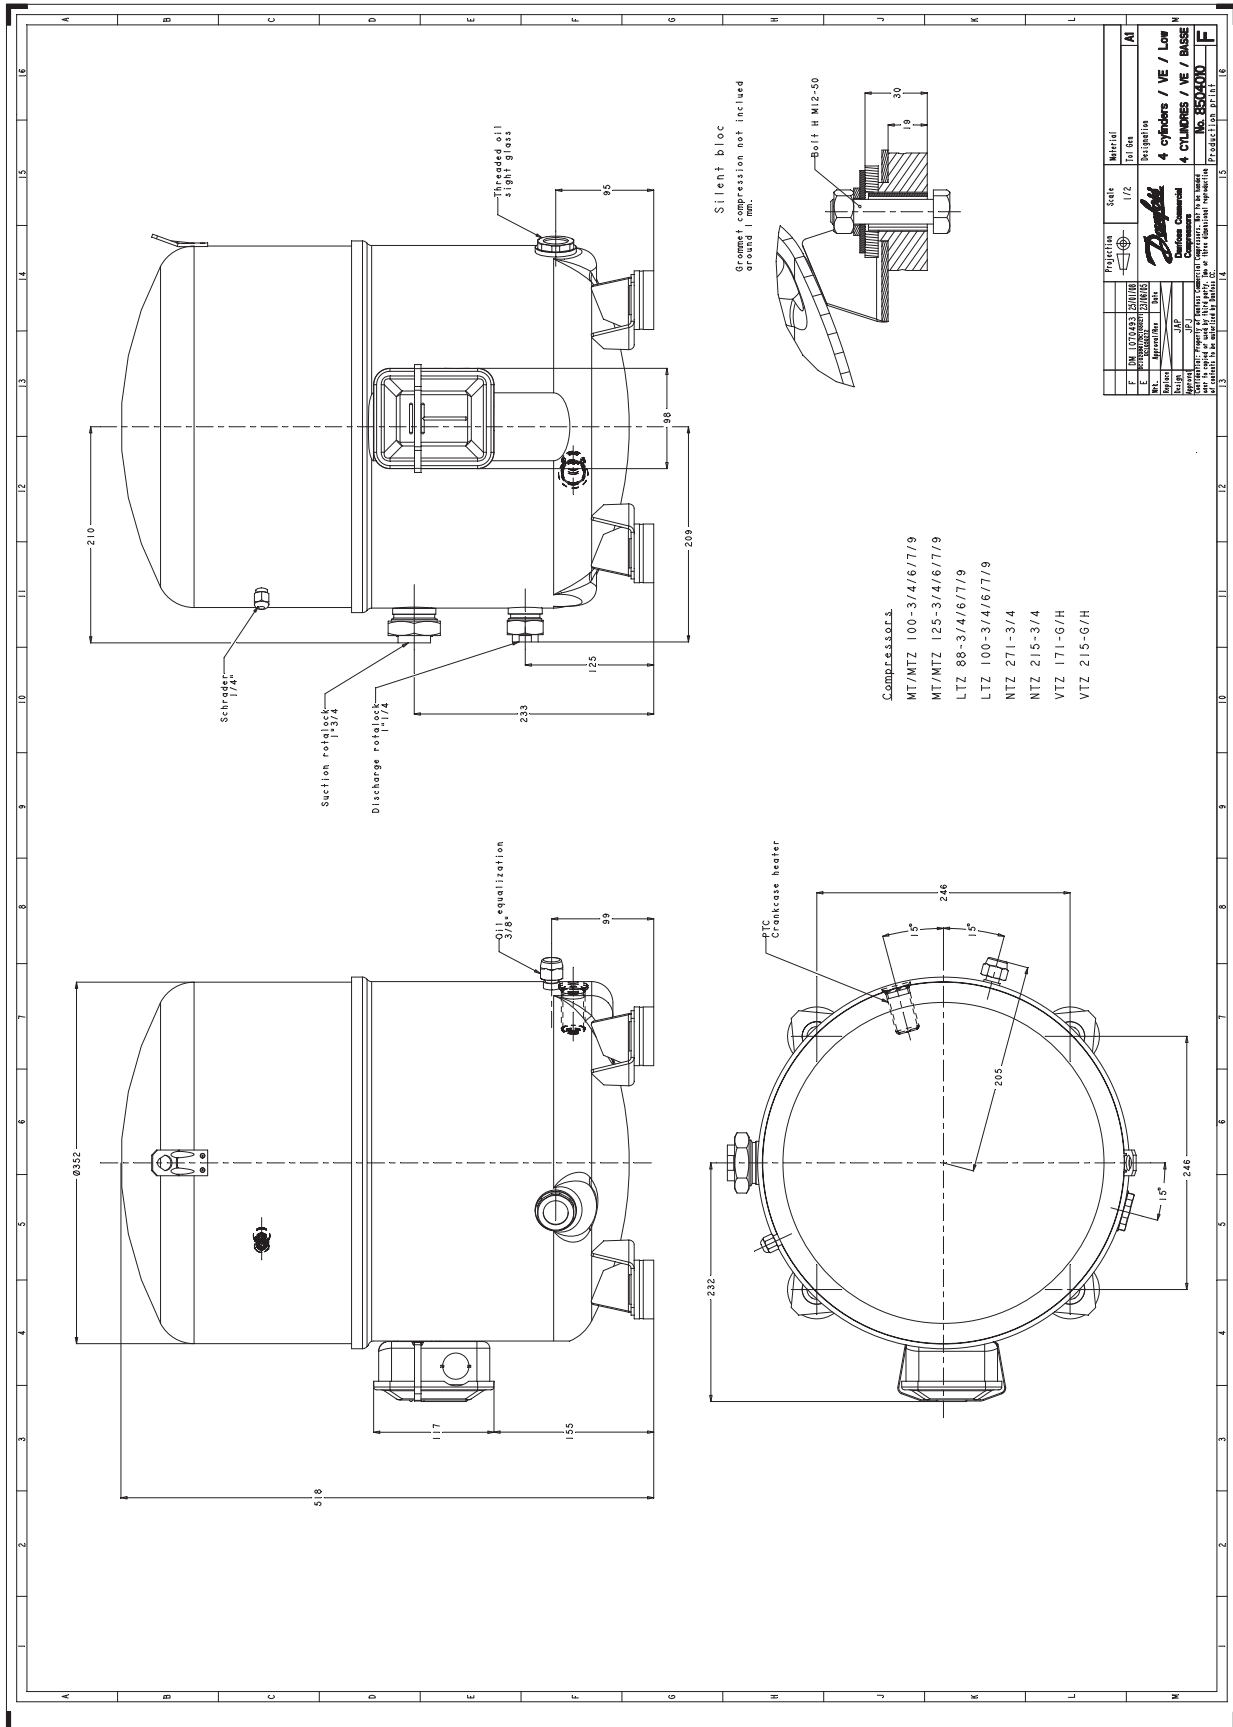
Sound power level	89	dB(A)
With acoustic hood	83	dB(A)

to: Evaporating temperature at dew point

tc: Condensing temperature at dew point

Rating conditions : Superheat = 11.1 K , Subcooling = 8.3 K

Tolerance according EN12900



Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss, the Danfoss logotype and Maneurop are trademarks of Danfoss A/S. All rights reserved.