


SOUR BOY (SERAMIC STONE)

- ◎Kneading and grinding : original grinding method,
Not generate "Shear stress" and "Burning"
We can get smooth soy bean paste.
- ◎Stainless hook : sanitary spec,
- ◎Ceramic stone is easily replace.

Inquiry to ; Matsubo Corporation Indonesia
Eman Joko Sufianto (Mr.)
 Wisma Keiai 7F, Jl. Jend. Sudirman Kav.3 Jakarta,
 Indonesia 10220
 TEL 021-572-4376,
 Email: eman.jokosufianto@kobelco-matsubo.com

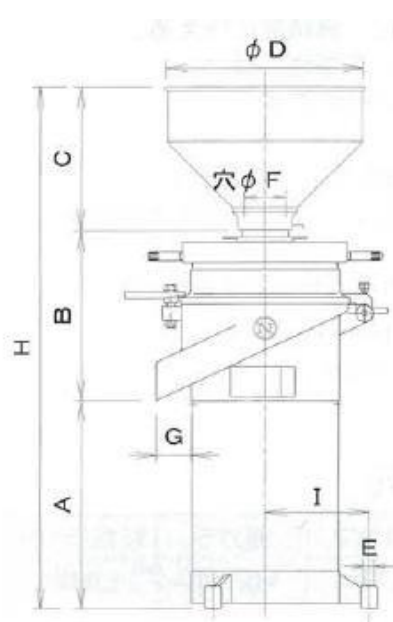

Type	Motor kW	Voltage	Stone	Capacity Dry base (kg/hour)
NSG-08C-100	0.75	200V 3phase	Ceramic φ 164	108kg/hour
NSG-08C	0.75	200V 3phase	Ceramic φ 180	120kg/hour
NSG-15T	1.5	200V 3phase	Ceramic φ 205	132kg/hour
NSG-15A	1.5	200V 3phase	Alundum φ 240	180kg/hour
NSG-22T	2.2	200V 3phase	Ceramic φ 225	210kg/hour
NSG-37C	3.7	200V 3phase	Ceramic φ 265	300kg/hour
NSG-75A	7.5	200V 3phase	Alundum φ 295	420kg/hour
HSG-75C	7.5	200V 3phase	Ceramic φ 305	420kg/hour
NSG-110F	11	200V 3phase	Ceramic φ 345	600kg/hour
NSG-150F	15	200V 3phase	Ceramic φ 380	810kg/hour

Capacity Data : Soymilk concentrate Brix=10% /reference value

Data of using soybean Constant supply feeder. (If use manual, possibility of over load.)

Type	A	B	C	D	E	F	G	H	I	Weight
NSG-08C-100	450	305	315	430	φ 15	72	65	1070	190	51kg
NSG-08C	450	305	315	430	φ 15	72	65	1070	190	51kg
NSG-15T	450	306	315	430	φ 15	86	50	1071	225	84kg
NSG-15A	450	312	315	430	φ 15	86	50	1077	225	87kg
NSG-22T	450	306	315	430	φ 15	86	50	1071	225	101kg
NSG-37C	450	368	312	430	M24	89	75	1130	225	126kg
NSG-75A	500	285	285	430	φ 20	135	83	1070	230	160kg
HSG-75C	500	260	312	430	φ 20	89	83	1072	230	160kg
NSG-110F	550	363	285	430	M24	138	50	1198	275	235kg
NSG-150F	600	443	285	430	M24	138	50	1328	300	260kg