



Portable Suspended Solids 740 Monitor and Soli-Tech 10 Sensor

PRODUCT DATASHEET

APPLICATIONS

Mixed Liquor Suspended Solids
Returned Activated Sludge
Final Effluent
River Monitoring

FEATURES

Wide Sensor Range
Upto 10 different calibrations
Compact Robust Design
Carry Bag Included

BENEFITS

Quick and Easy Suspended Solids
Measurement
Multiple sites with one monitor

ALTERNATIVE PRODUCTS


7200 Monitor
Turbi-Tech 2000LA Sensor
Turbi-Tech 2000LS Sensor



The 740 Monitor provides, quick and accurate readings of Suspended Solids, Sludge Blanket Level, and Turbidity, via an intuitive menu structure from a totally portable package. The robust IP65 enclosure incorporates a security strap and protective case to prevent accidental dropping, impact damage and abrasion of the display surface. The display itself is a high contrast LCD that has been designed to work over a wide temperature range with no loss of clarity. A rugged carrying case holds the above, together with the measuring probe, cable, battery charger and instruction manual.

The 740 Monitor includes capability for up to ten customer programmed user profiles, each defined by site specific calibrations to cater for differences in the effluents being monitored. A retrospective adjustment to the calibration for each site is also possible via a unique menu facility that enables a specific sensor output to be stored in memory at the same time as a liquid sample is taken. The gravimetric analysis of the suspended solids level in the sample is then returned to the monitor as the final calibration figure. Further site calibration enhancement is afforded by the ten-point look up table, that allows the monitor to accurately measure suspended solids in vast majority of applications.

The achievable accuracy and ease of use make the 740 Package ideal for regular checking of suspended solids levels to process or legislated requirements in activated sludge plants, final effluent outfalls, treatment plant inlets, streams and rivers and as a secondary standard to check other on-line and portable instruments.

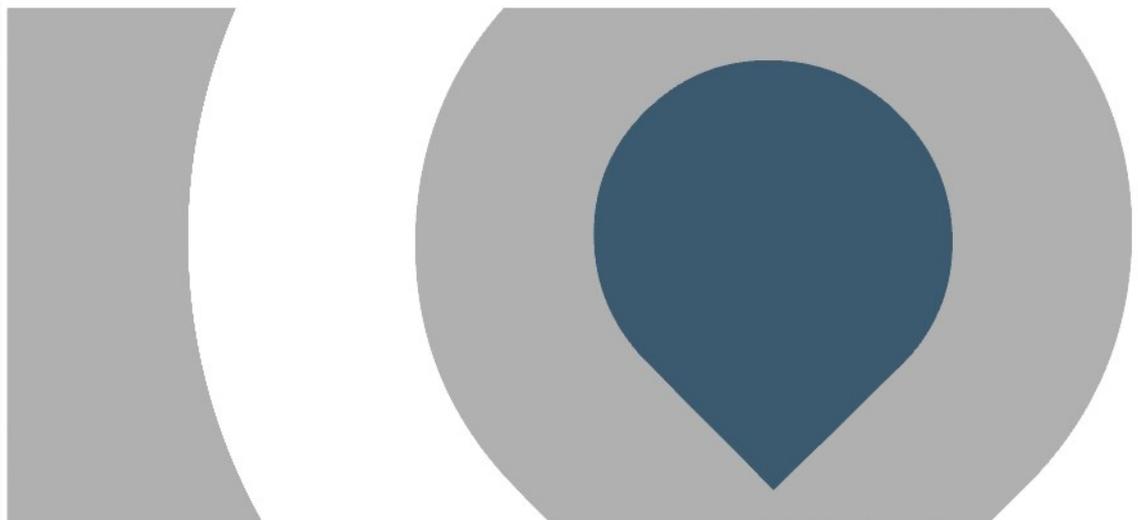



Call us on 01726 879800 www.partech.co.uk





Portable Suspended Solids 740 Monitor and Soli-Tech 10 Sensor

PRODUCT DATASHEET

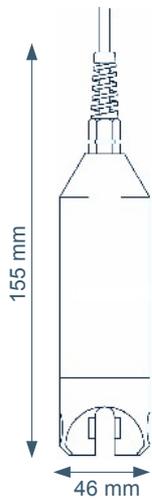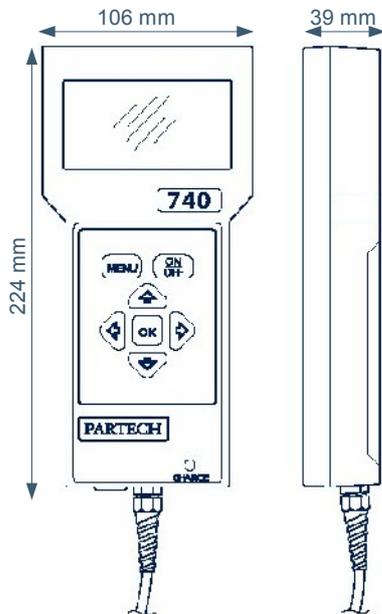

Physical

Weight
Dimensions (h x w x d)
Enclosure Rating
Enclosure Material
Cable Entries
Cable Size
Cable Length

Service Requirements

Environmental Data

Operating Temperature
Storage Temperature
Location
Power Supply

Measurement Details

Response Time
Accuracy
Repeatability
Measurement Principle
Wavelength
Pressure Rating
Flow Rate
Maximum Range
Minimum Range

User Interface

Display
Setup
Units of Measurement

Software

Remote Programming

Monitor

0.5 kg
224 x 106 x 39 mm
IP65
ABS
Plug for Sensor, Charger
3 core, 5 mm OD Polyurethane coated cable
5 metre standard, 100 metre maximum
Cable marking every 1 metre
No routine servicing
Will require cleaning after use

Sensor

0.6 kg (inc 5 metres of cable)
45 mm Diameter, 155 mm long
IP68
Black Acetal Co-Polymer
Integral Cable Gland

Monitor: -20 to 60°C

Sensor: 0 to 60°C

-20 to 60°C

Portable

Universal Charger 90-264 VAC, UK, US, and EU Plug Styles

Optional car charger available

0.5 seconds, damped by monitor

+/- 5% FSD on real sample

+/- 1% FSD on real sample

Infrared Light Attenuation

880 nm

10 mWC

Not effected by flowrate

0 – 20,000 mg/l

0 – 50 mg/l

Graphical Display providing 4 1/2 Digit with 2 message lines
via 4 Button Membrane Keypad
mg/l, g/l, ppm, NTU, FTU, %SS, User Defined

No

Publication No: I84150DS-Iss03
The company reserves the right
to alter the specification without
prior notice. E&OE

Call us on 01726 879800 www.partech.co.uk

