

Handheld Formaldehyde Meter/Monitor



HAL-HFX205

Features

- Wide measuring range
- Fast response
- Direct real time reading
- Manual and auto data save (user-defined auto log time interval)
- High-speed USB with a free data download software
- Auto backlight
- Self-calibration function
- Audible and user-defined excess limit warning
- Optional RH/T sensor probe for reading correction
- Over 7 hours of operation time
- CE certified
- Simple and easy to use

Formaldehyde (HCHO) is one of the most commonly poisonous substances found in daily life and industry. The HAL-HFX205 formaldehyde monitor/meter is designed for use in a wide variety of applications such as furniture, floor boards, wall papers, paint, gardening, indoor decoration, construction, dye stuffs, paper manufacture, pharmaceutical, medical, food, cleaning, synthetic resins, textile treatment, horticulture and cosmetics. The HAL-HFX205, based on reliable electrochemical sensing technology, features fast response times, directly displays the formaldehyde concentration in ppm or mg/m3. Newly re-designed HFX205 has significant improvement including side-access USB and power ports, temperature-corrected reading and longer battery operating time over previously obsolete model, HAL-HFX105.


Specifications


'	pecifications		
	Target Gas	Formaldehyde (HCHO) in air	
	Range	0.00 ~ 10ppm (0.00 ~ 25ppm and up to 100ppm available for special request)	
	Technology	Electrochemical sensor	
	Sampling Method	Pump and pointing sampling	
	Response Time	< 30 seconds	
	Resolution	0.01ppm	
	Display Unit	ppm or mg/m ³	
	Memory	Up to 500 sets of data	
	Interface	USB for data downloading	
	Operating Environmental Conditions	Temperature: 0 ~ 50°C Humidity: <90%RH	
	Power	Replaceable and rechargeable Lithium ion battery (3.7V/1250mAh); AC adapter 100-240VAC to 5VDC/1A	
	Dimensions	80 (W) × 45 (D) × 157 (H) mm	
	Weight	About 200 grams	



Sensor Performance Data

Linearity of HCHO Response

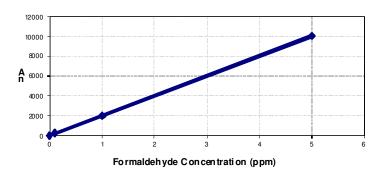

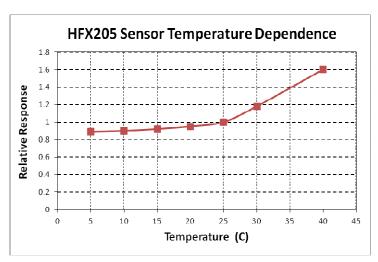

Sensor Cross Sensitivity Data

Chemicals	Response (HCHO equivalent)	
100 ppm Methanol	1ppm	
10 ppm Ethanol	1ppm	
25 ppm Isopropanol	0.5ppm	
20 ppm Carbon Monoxide	1ppm	
25 ppm Phenol	0.05ppm	
100 ppm Acetaldehyde	0.5ppm	
100 ppm H2	0.5ppm	
50 ppm H2S	3ррт	
50 ppm SO2	0.5ppm	
Methane, acetone, CO ₂ H2O vapor have no response		