

BRAQUE

1T3759

LIGHT SOURCE **LED** COLOUR TEMPERATURE **3000K** POWER (SOURCE) **13W** CRI **80** BEAM ANGLE **VWFL**
 COLOUR AND FINISH **PLASTER WHITE** VERSION **HORIZONTAL** POWER SUPPLY **220-240Vac 50/60Hz**
 INSULATION CLASS **CLASS 1** GLOBAL IP OR HOUSING **IP40** F CLASS **YES**



CONCEPT

Indirect emission wall mounted LED fixture.

MATERIALS

Matt painted aluminium body. Transparent polycarbonate screen.

SOURCE

Dimmable LED module 230V Ra80.

INSTALLATION


Fit to be installed parallel or perpendicular to the wall.

POWER SUPPLY

Driver not required. 220-240Vac 50/60Hz

NOTES


Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

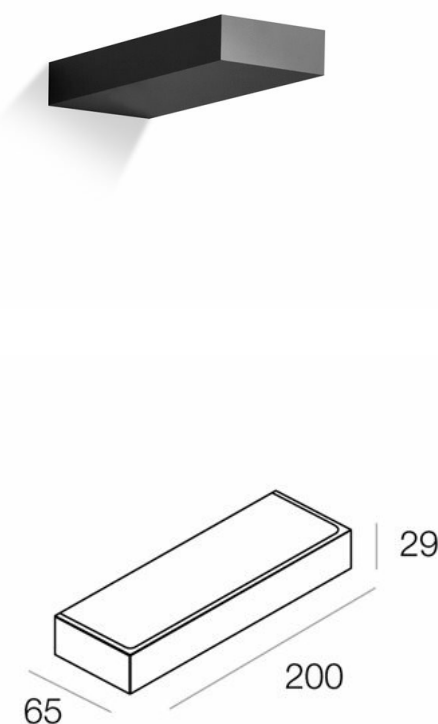

All the measures are expressed in mm

Photometries

	3000K Ra80	H(m) D1(m) D2(m) Emax(lx)		
		110°	108°	
Fixture Power	14W	1	2.86	2.73 348
Source Flux	893lm	2	5.72	5.46 87
Fixture Flux	893lm	3	8.58	8.18 39
Efficacy	65lm/W	4	11.44	10.91 22
Imax	348cd	5	14.29	13.64 14



Accessory Codes

Control Systems



1T5351

Control System

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology. It works with LED 230 V-AC modules, dimmable LED sources and halogen lamps. It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies. It can manage systems with a maximum absorption of 150W. The module is wireless controlled using a CASAMBI app for smartphones and tablets or traditional wall switches. IP20