

FLEX series

Luci Power FLEX EX 15mm pitch






Luci Power FLEX EX 15mm pitch



Luci Pte., Ltd.

2017.02.14

MacAdam 3STEP(IF: 150mA, Ta: 25°C)

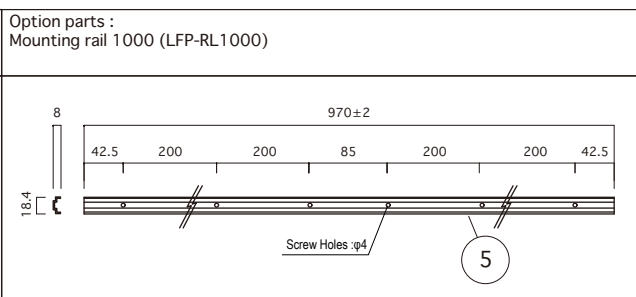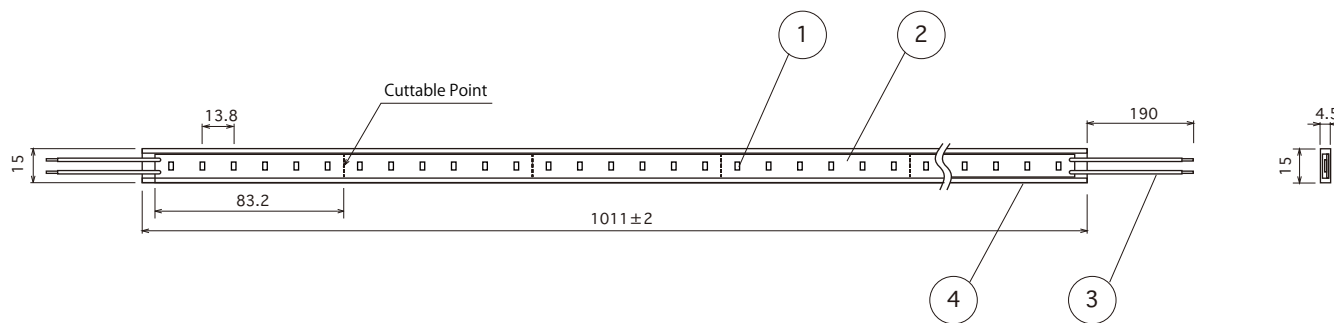

Unit Of Measure : mm

The specifications and prices are subject to change without prior notice.

Part Name	Material	Note	Drawing
1 LED		SMD/Top view type	
2 Tape Substrate	FPC		
3 Lead Wire		UL1007 AWG22 Black+,White-	
4 Body	Soft acrylic	Clear	
5 Mounting rail	AES	White	
6 Mounting parts	Polycarbonate	Clear	
7 Mounting clip for rail	Polycarbonate	Clear	
8 End cap	Polycarbonate	Clear	
9			

Spec	Item Number
Input voltage : DC24V	LFPEX15-1000-W-CL-I LFPEX15-1000-WW-CL-I LFPEX15-1000-L30-CL-I LFPEX15-1000-L27-CL-I LFPEX15-1000-L24-CL-I LFPEX15-1000-L21-CL-I LFPEX15-1000-L19-CL-I
Power consumption : 18.2W/m	
Weight : 60g	
Number of LEDs : 72	
Max. sets connectable : 5m	
Min. bending range : R50mm	
Environment : Indoors (No Condensation)	
Option parts : End cap	
Mounting clip , Mounting rail	
Light Source color : White : W : 4000K(1680 lm*/Ra 93*) Warm white 3500K : WW : 3500K(1620 lm*/Ra 93*) Warm white 3000K : L30 : 3000K(1493 lm*/Ra 94*) Warm white 2700K : L27 : 2700K(1496 lm*/Ra 93*) Warm white 2400K : L24 : 2400K(1260 lm*/Ra 93*) Warm white 2100K : L21 : 2100K(lm*/Ra 80*) Warm white 1900K : L19 : 1900K(lm*/Ra 70*) * =Equivalent	

Job/Project Name	Area/Location/Circuit No.
Product Code	Qty. Length(mm)