



SmartBright Troffer

RC098V LED44S/865 W60L120 GM

3 pcs

SmartBright 2.0 troffer is the most affordable LED troffer delivering comfortable light with high quality. It offers two lumen options with three dimension types, 600x600,300x1200 and 600x1200mm

Product data

General Information	
Number of light sources	3 pcs
Light source color	865 cool daylight
Light source replaceable	No
Number of gear units	2 units
Driver/power unit/transformer	Power supply unit
Driver included	Yes
Optic type	Beam angle 60 to 120°
Optical cover/lens type	Variable linear-lens array in polycarbonate cover
Luminaire light beam spread	110° x 110°
Protection class IEC	Safety class I
Glow-wire test	Temperature 650 °C, duration 30 s
CE mark	-
ENEC mark	-
UL mark	-
Constant light output	Yes
Spare parts available	Yes
Operating and Electrical	
Input Voltage	220-240 V

Power Factor (Nom)	0.9
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing Material	Steel
Reflector material	Steel
Color	White
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Init. Corr. Color Temperature	6500 K
Init. Color Rendering Index	80
Initial input power	51.5 W
Power consumption tolerance	+/-10%

SmartBright Troffer

Over Time Performance (IEC Compliant)

Median useful life L70B50 25000 h

Application Conditions

Ambient temperature range -20 to +40 °C

Product Data

Full product code 911401540221

Order product name RC098V LED44S/865 W60L120 GM

Order code 911401540221


Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 2

Material Nr. (12NC) 911401540221

Net Weight (Piece) 4.249 kg

Dimensional drawing

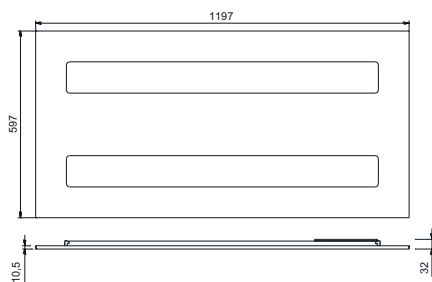

SmartBright Troffer RC098V

