



FlowBase

BWP352 LED69/NW 60W 220-240V DM2 MP1

A lighting design that ensures safety and good visibility is a key element in the success of any tunnel project. Philips FlowBase combines compact design, reliability, and affordability in one complete package to bring the perfect lighting solution for any tunnel application.

Product data


General Information	
Light source colour	740 neutral white
Driver/power unit/transformer	PSU [Power supply unit]
Driver included	Yes
Protection class IEC	Safety class I (I)
CE mark	CE mark
ENEC mark	-
UL mark	-
Constant light output	No
Operating and Electrical	
Input voltage	220-240 V
Input frequency	50 to 60 Hz
Power factor (nom.)	0.95 (nominal power)
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing material	Aluminum
Optic material	Polycarbonate
Fixation material	Aluminum

Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Initial Performance (IEC Compliant)	
Initial luminous flux	6500 lm
Initial LED luminaire efficacy	108.3 lm/W
Init. Corr. colour temperature	4000 K
Initial input power	60 W
Over Time Performance (IEC Compliant)	
Median useful life L70B50	50000 h
Application Conditions	
Ambient temperature range	-40 to +50 °C
Maximum dimming level	10%
Product Data	
Full product code	911401808398
Order product name	BWP352 LED69/NW 60W 220-240V DM2 MP1
Order code	01808398
Numerator – quantity per pack	1
Numerator – packs per outer box	1

FlowBase

Material no. (12NC)	911401808398
Net weight (piece)	3.999 kg

Dimensional drawing

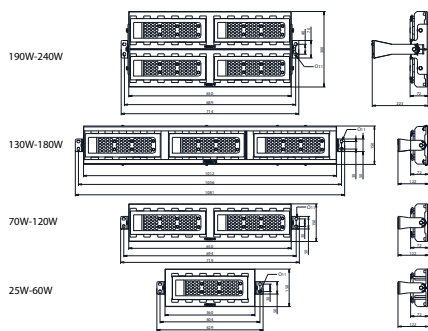

FlowBase BWP352

