



EMERGENCY LIGHTS PROVIDER

LED Aesthetical non-maintained emergency twin light

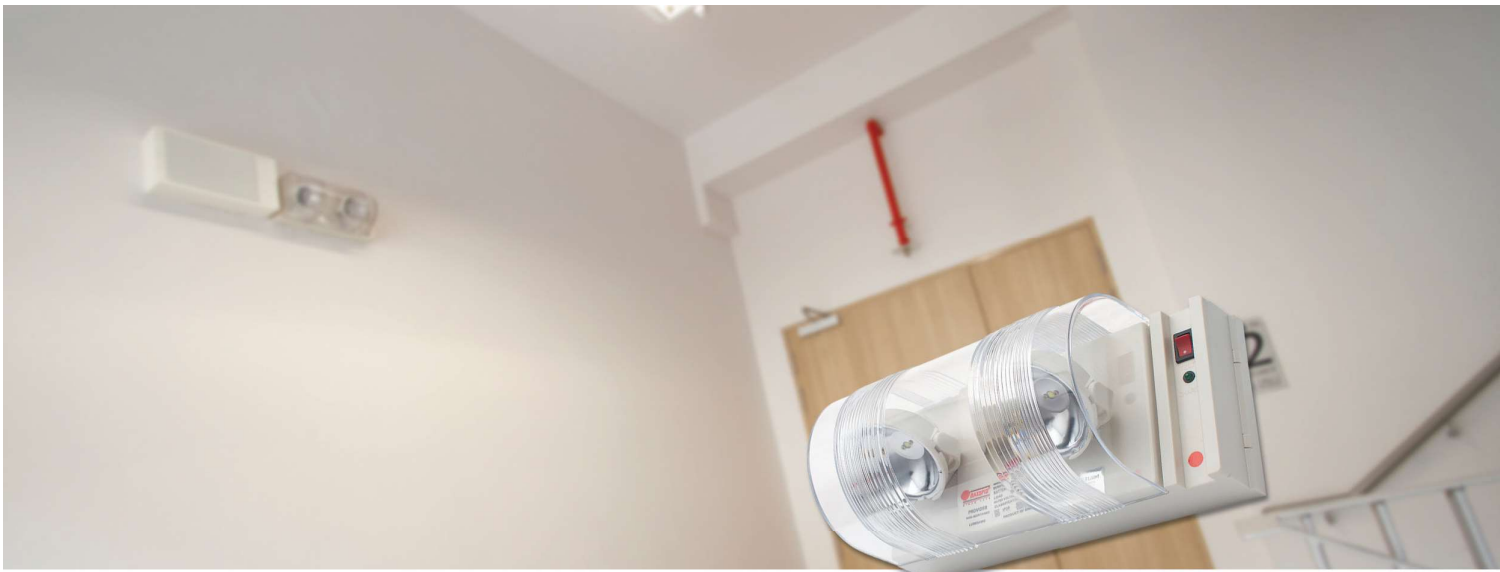

● PP203L NC

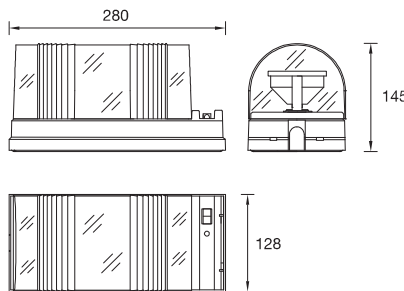

Dimension: mm NTS
High Power L.E.D

TECHNICAL DATA


Mode of Operation	: Non-Maintained
Lamp	: 2 x 3W High Power LED
Rated Duration	: 2 hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: < 2W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED Ø5mm
Test Facility	: Rocker switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Housing	: High impact thermoplastic enclosure in a matt white finish. Transparent half cylinder Polycarbonate lamp shield with fresnel pattern and fully adjustable self-locking lamp heads
Mounting	: Wall or ceiling. The snap-fit design will facilitate easy installations. Easily removable mounting and knockout holes are provided (fitting can be positioned vertically or horizontally)
Cable Entry	: Ø20mm K/O hole
Weight	: 1.2kg (gross)
Compliance	: SS 563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	: 1 year

KEY FEATURES

- > High Brightness Output
- > High Lumen/watt Efficiency
- > Low Power Consumption
- > Low Maintenance
- > Long Lifespan

ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Model	Lamp	Battery type
PP203L NC	2 x 3W LED	Nickel Cadmium



Type and batch tested with
PSB PLS-LISTED LABEL

Surface Mount
Flexible Application
Emergency Luminaire



Specifications subject to changes without prior notice.

