


LIGHTING YOUR WAY



MERCMASTER™ LED LOW PROFILE

Get the most from your LED investment, with lighting quality that makes a difference for the productivity and safety of your employees. Mercmaster LED Low Profile provides a broad, evenly distributed pattern that can be tailored in the field. This is the one harsh and hazardous location luminaire you can specify to meet all your low-mount application requirements – without compromise.



 **Appleton**® For product information:
www.appletonelec.com | 1.800.621.1506


EMERSON™

Appleton Grp LLC d/b/a Appleton Group. The Appleton and Emerson logos are registered in the U.S. Patent and Trademark Office. © 2016, Appleton Grp LLC. All rights reserved.

EMERSON. CONSIDER IT SOLVED.™


ONE LUMINAIRE FOR LED SIMPLICITY

Choose the right lighting levels for any low-mount application while eliminating spotlight effects and dark spots. Mercmaster LED Low Profile luminaires offer a choice of globes and an optional 30° reflector to achieve the optimum light distribution for any application.

- Choose light outputs from 2,500 to 5,000 lumens, with far less power consumed and heat generated per lumen.
- Ensure uniform light distribution without spotlight effects or dark spots in low-mount applications from 7 to 15 feet.
- Optimize lighting with a choice of four globes and a 30° angled reflector that can be installed in the field to increase beam spread, eliminate glare and redirect light.
- Mount to existing Mercmaster hoods in minutes, with no additional wiring required. One luminaire can be adapted for pendant, ceiling, wall or stanchion applications.
- This compact, low-profile LED luminaire weighs under 10 pounds and never requires relamping.
- Mercmaster LED Low Profile is robust enough to use in the toughest environments, including refineries, chemical plants, processing plants and more.
- Ordinary and hazardous location versions are cULus Listed to UL and CSA standards.

Light Where You Need It

Compare these two 3-foot-wide walkways with 25° stanchion fixtures mounted every 15 feet along the side. Fixtures are 7 feet high. The competitor's luminaire produces hot spots and shadows along the walkway. Consuming only half the power, the Mercmaster LED Low Profile with prismatic refractor delivers more evenly distributed light, with no hot spots, while maintaining more than the desired 5 foot-candles of light.

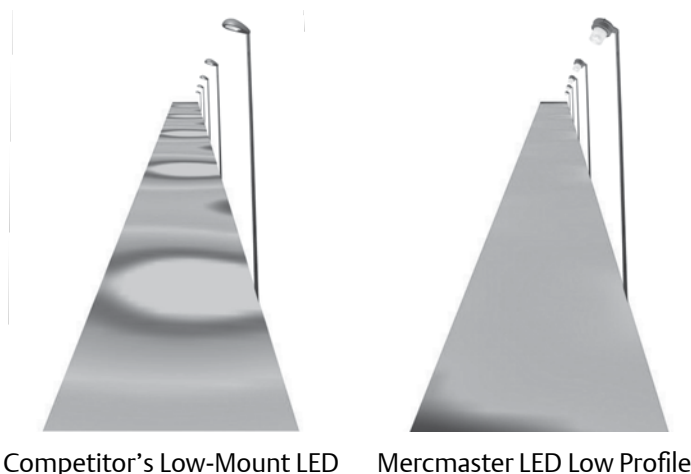

For more information, contact your local sales representative or visit www.appletonelec.com



United States: 1.800.621.1506 | Asia/Pacific: + 65.6556.1100 | Australia: + 61.3.9721.0348
Canada: + 1.888.765.2226 | China: + 86.21.3338.7000 | Europe: + 33.3.22.54.13.90
Mexico/Latin America: + 52.55.5809.5049 | Middle East/Africa/India: + 971.4.811.8100
www.appletonelec.com | Facebook | Twitter | YouTube

Appleton Grp LLC d/b/a Appleton Group. The Appleton and Emerson logos are registered in the U.S. Patent and Trademark Office. All other product or service names are the property of their registered owners. © 2016, Appleton Grp LLC. All rights reserved.

