



- The latest LED technology with a high luminous efficacy and a long service life
- Extremely high luminaire efficacy
- Can be adjusted from a 1.5 to a 3.0 h rated operating time
- Luminous flux after 100,000 h still 90% of the starting luminous flux
- Optionally with DALI for controlling and monitoring the luminaire
- Weekly functional test and annual rated operating time test

WebCode 6009D



The emergency luminaire with Series 6009/4 LED with integrated battery can be installed in stand-by switching, continuous mode or in switchable stand-by switching. A weekly functional test and annual rated operating time test are performed automatically. The results are indicated by an LED.

Technical Data

Explosion Protection

Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX IBE 16.0038
IECEX gas explosion protection	Ex db eb ib mb op is IIC T4 Gb
IECEX dust certificate	IECEX IBE 16.0038
IECEX dust explosion protection	Ex tb op is IIIC T100 °C Db
ATEX gas certificate	IBExU 16 ATEX 1199
ATEX gas explosion protection	Ex II 2 G Ex db eb ib mb op is IIC T4 Gb
ATEX dust certificate	IBExU 16 ATEX 1199
ATEX dust explosion protection	Ex II 2 D Ex tb op is IIIC T100 °C Db
EAC certificate	EAEU RU S-DE.HA91.B.00018/19
EAC dust explosion protection	Ex tb IIIC T100°C Db X
Certificates	ATEX (IBE), IECEX (IBE)

Electrical Data

Ex version	Yes
Rated operational voltage AC	110 – 240 V
Rated operational voltage max. AC	240 V
Rated operational voltage min. AC	110 V
Battery version	NiCd battery, gas-tight
Battery operating voltage	6 V
Battery capacity	7 Ah
Self-test function	With (standard)
Frequency range	50 – 60 Hz

Lighting Data

Number of lamps	1
Lamp wattage	45 W

Lighting

Emergency luminaire With LED

GRP

6009/4148-2103-162-2220-22-850011 Art. No. 267875



Lighting Data

Lamp	LED
Light colour	Neutral white
Light distribution	120°x120° with diffusing glass
Luminaire efficacy	129 lm/W
Luminous flux	5810 lm
Operating time	1.5 / 3h emergency lighting operation
Emergency light output	20% ... 3 h 35% ... 1.5 h
Colour rendering	≥ 80
Colour temperature	5000 K

Ambient Conditions

Ambient temperature	-30 °C ... +50 °C Note: Through wiring max. 3x16 A -30 °C ... +55 °C Note: Through wiring 2 max. 3x10 A
---------------------	--


Mechanical Data

Version	Standard
Degree of protection IP (IEC 60598)	IP66/IP67
Enclosure material	Polyester resin, Glass fibre reinforced
Diffuser	With diffuser
Sealing material	Silicone
Silicon free	Contains silicone
Material translucent cover	Polycarbonate
Installed terminal strip	PE + N + L1 + L2 + L3 + L´
Connection terminals solid max.	6 mm ²
Connection terminals finely-stranded max.	4 mm ²
Type of connection cable	Finely stranded Solid
Design size	4
Width	183.5 mm
Height	125 mm
Length	1467 mm
Impact strength (IK code)	IK10 (IEC 62262)
Enclosure colour	Light grey (RAL 7035)
Weight	9.2 kg
Weight	20.28 lb
Disconnection of the luminaire	All-pole disconnection

Components


Threaded plate	2x SS430 stainless steel
Ballast	6046/211-121-010 LED NLE 7Ah
Through wiring	With 6 conductors 2.5 mm ²
Drilled holes	3 x M20
Cable entries	Can be ordered as accessories
Stopping plug	Can be ordered as accessories
Accessories	Without

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations


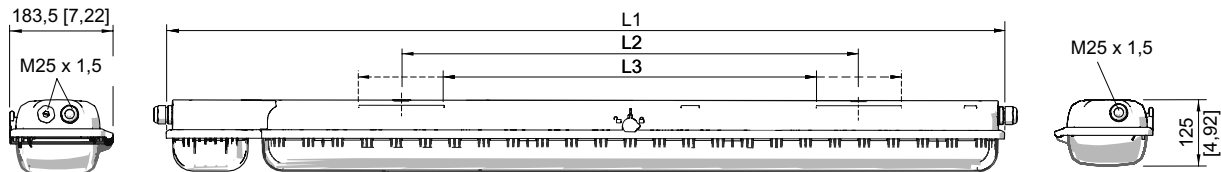


Size 2:
L1 = 857 mm [33.74]
L2 = 400 mm [15.75]
L3 = 320 ... 480 mm [12.60 ... 18.90]


Size 4:
L1 = 1467 mm [57.76]
L2 = 800 mm [31.50]
L3 = 670 ... 930 mm [26.38 ... 36.61]




Ring bolt fitted in insert nut of the luminaire

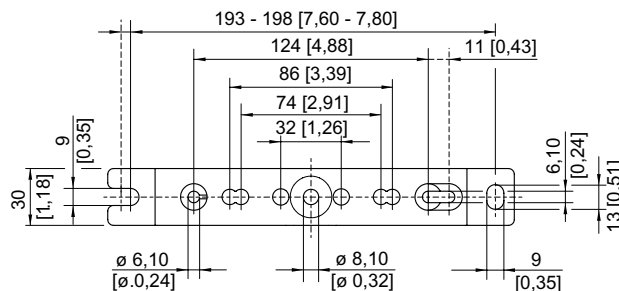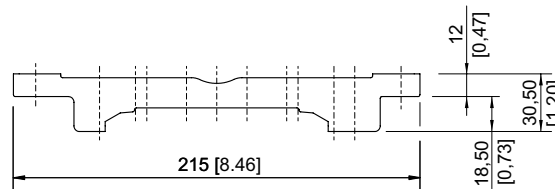

Mounting rail



Mounting rail




Pipe clamp fitted in mounting rail

Lighting


Emergency luminaire With LED

GRP


6009/4148-2103-162-2220-22-850011 Art. No. 267875




Mounting bracket fitted in mounting rail

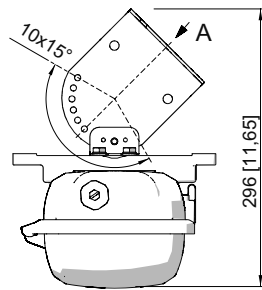

A

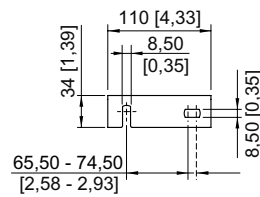

Wall mounting bracket fitted in mounting rail

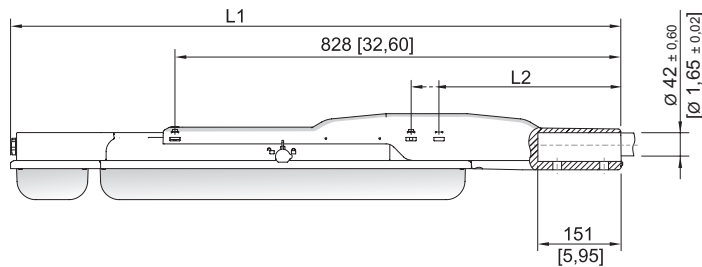

With pole mounting sleeve

Size 2:


L1 = 1133 mm [44,61]

L2 = 390 mm [15,35]




Size 4:

L1 = 1742 mm [68,58]

L2 = 338 mm [13,31]



Accessories and Spare Parts

Cover		Art. No.
	for luminaire size 4	222428
Contact element		Art. No.
	8080/1-3-L 2 NC contact element	132527
Socket key		Art. No.
	M8 / wrench size 13; to open/close the central locking	222430










Lighting

Emergency luminaire With LED

GRP

6009/4148-2103-162-2220-22-850011 Art. No. 267875



Mounting rail		Art. No.
	for a variable mounting distance; 1 pair	222826
Mounting bracket		Art. No.
	mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair	222456
Pole mounting sleeve		Art. No.
	for the subsequent mounting on lights size 2 and size 4, completely with assembly parts (for pipe diameter 42 mm)	227512
Pipe clamp		Art. No.
	R 1 1/2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222459
	R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222458
	R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair	222460
Ring bolt		Art. No.
	M8, direct mounting in insert nuts; 1 pair	115736
Breather		Art. No.
	Thread: M25 x 1.5; 1 pc; for installation in lights; in moulded material; without counter nut	138573
	Thread: M25 x 1.5; 20 pc; for installation in lights; in moulded material; without counter nut	138576
	M25 x 1.5 in order to avoid condensate formation	115738
Ceiling and wall mounting bracket		Art. No.
	mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair	222827
Bracket for wall mounting with tube		Art. No.
	for side entry lamp; with tube, length 400 mm, Ø 42 mm	108947
Battery set		Art. No.
	Battery cover with built-in battery. Gas-tight NiCd battery; 7 Ah / 6 V	223532

Lighting

Emergency luminaire With LED

GRP

6009/4148-2103-162-2220-22-850011 Art. No. 267875



We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.