

Mega Flood Light

G-COMIN

CO-T600-900W

160LM/W





Features:

- High lumen
- Easy combination
- Adjustable module
- IP66 & IK10

Areas of application:


Large stadiums, Airports, Parking lots, Terminals, Tennis court, Golf course, Power stations, Commercial parks etc.

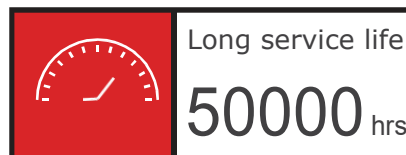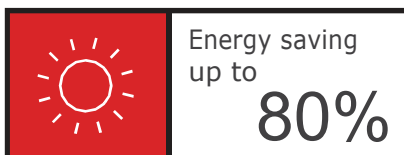

CE CB RoHS




1 Parameter

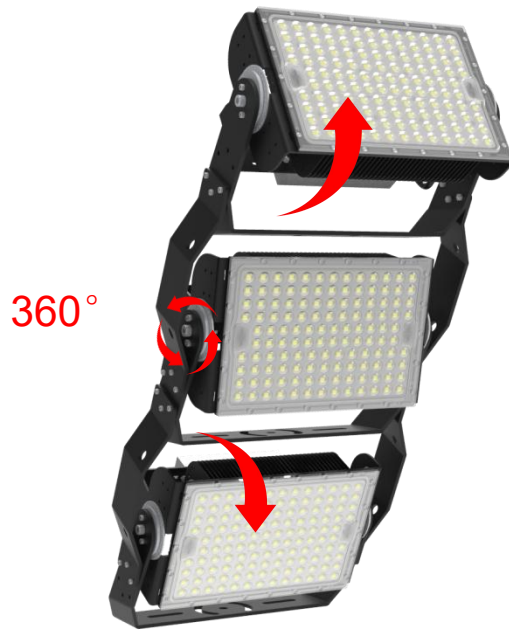

Wattage	CRI	Power Factor
900W (300W*3)	Ra>70/80	>0.95
Operating Temp	IP & IK Grade	Luminous Flux
-40°C ~55°C	IP66 & IK10	144,000LM±5%
Beam Angle	LED Quantity	Rated Voltage
30°/60°/90° Asymmetric G4	128LEDS Each Module	AC 100-240V 277V~, 50/60Hz

2 Beam angle

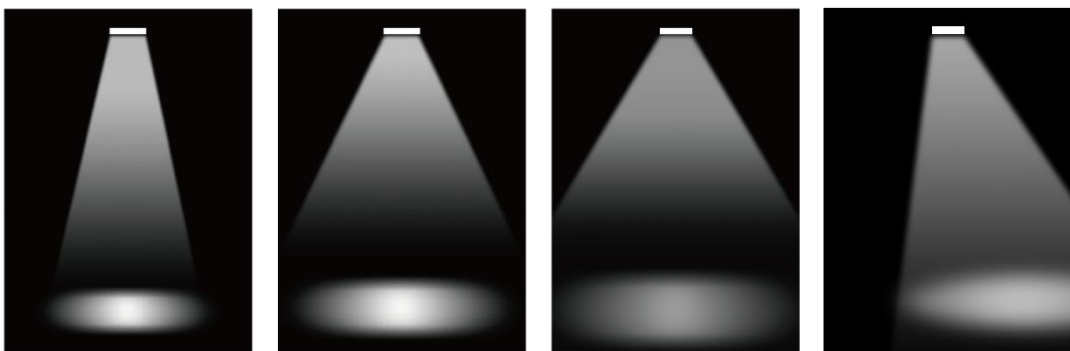

30°


60°

90°


Asymmetric G4

3 Installation


① Ground Installation




② Wall Installation



③ Pole Installation

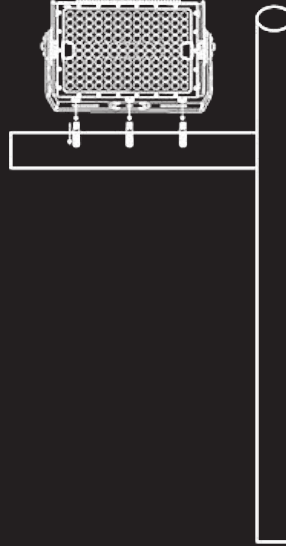

④ Ceiling Installation



4 Dimensions

