

U-B9451D




Products Specifications


- Input Voltage: AC120 ~ 277V
- Power consumption: 1) 30.5W(AC120V) / 31.4W(AC277V)
2) 30.8W(AC120V) / 30.8W(AC277V)
- Luminance flux: 1935 ~ 2084 lm
- Color rendering: CRI (Ra)=93(typ)
- Fixture's weight: 1) 5.6 lbs 2) 5.76 lbs
- Light distribution: Wall
- Input current: 0.67A
- Aiming distance: 0.2m (7 7/8 in)
- Ceiling thickness: 23/64 ~ 63/64 in
- Glare cut off angle: 35°

Size

Size of hole for installation
3 15/16"

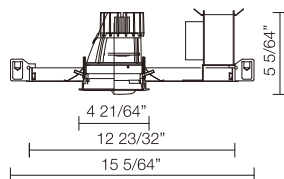

Installation

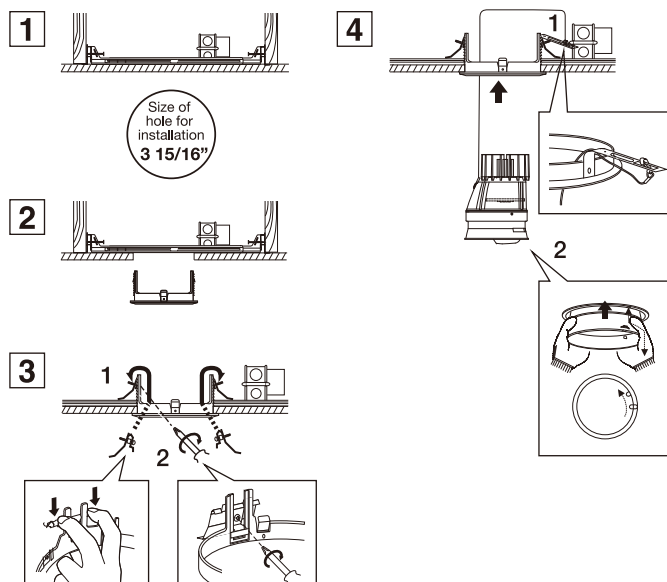

Product code

[ex : White cone / White trim / 0-10V type / 3000K]

U-B9451D/1/R30B/WC/W

Series	Function	Light source	Function	Auth-entification	Color temperature	Cone Color	Trim Color
--------	----------	--------------	----------	-------------------	-------------------	------------	------------


Dimming | 0-10V | 5-100%

- White: U-B9451D/1/R27B.R30B.R35B.R40B/WC/W(White)
- Matte black: U-B9451D/1/R27B.R30B.R35B.R40B/MC/W(White).M(Matte black)
- Chrome: U-B9451D/1/R27B.R30B.R35B.R40B/NC/W(White).M(Matte black)

Dimming | Eco system | 3-100%

- White: U-B9451D/2/R27B.R30B.R35B.R40B/WC/W(White)
- Matte black: U-B9451D/2/R27B.R30B.R35B.R40B/MC/W(White).M(Matte black)
- Chrome: U-B9451D/2/R27B.R30B.R35B.R40B/NC/W(White).M(Matte black)

Light distribution (Chrome cone)

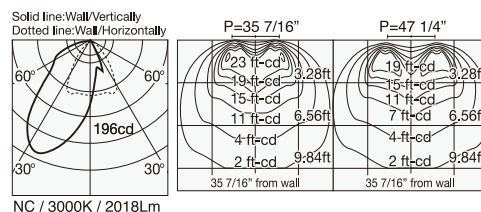

NC / 3000K / 2018Lm

Contact Mosheo Corporation
2B Airport Drive Ext. Hopedale,
MA 01747
Phone : +1-774-804-3283
E-mail : ModuleXSales@Mosheocorp.com

ModuleX[®]