



NISO, NIS, NISF

50Hz

End Suction Centrifugal Pump



Nanfang Pump Industry Co.,Ltd.

CNP Headquarter

Address: Renhe Town, Hangzhou, China

Post code: 311107

Tel: +86 571 86051667,86390516,86390517

Fax:+86 571 86051696

E-mail: info@nanfang-pump.com

http://www.cnppump.com

E150309
subject to amendments



Company Profile



Founded in 1991, Nanfang Pump Industry Co., Ltd. (hereinafter referred to as CNP) has been listed on the Shenzhen Stock Exchange on 9th December 2010; Stock name: CNP; Stock code: 300145.

As the first enterprise specializing in the research and large-scale production of stainless steel stamping welded centrifugal pump in China, CNP is currently the professional manufacturer with the highest volume of production and marketing in that industry. It ranks first in the country in terms of product scope, sales volume, and production quality. The company has set up a complete network of marketing services to meet the requirements of overseas markets as well as domestic needs. The products have seen a wide range of application in the area of pressurization, industry, living water, cycling of air-conditioning water, heat supply, fire extinguishing system, pumping of underground water, treatment of sewage and waste water, chemical industry and desalination of sea water etc.

CNP has now entered into the fast track of development and has taken a major step forward in forging China Strong Pump Enterprise and World's famous brand in the Pump Industry. In order to better meet the client's needs and requirements for expansion, it has set up a wide network of selling and service, as well as offices and service centers in major cities in China, which are aimed at providing timely and effective services for our clients. Meanwhile, our company has successfully penetrated into the world market by forging a good business relationship with more than 50 countries and regions in the Europe, Northern American, and Southeast Asia etc.

Content


General Data

Definition of Model	3
Min inlet pressure	3
Typical application	3
Construction	3
Specification	3
Curve conditions	3
Features	3
Model performance drawing	4
Sectional drawing	5
Part list	5
Models	7

Technical Data

2 Pole	
50-32-160/50-32-200	11
65-40-200/65-40-250	12
65-40-315/65-50-160	13
80-50-200/80-50-250	14
80-50-315/80-65-160	15
100-65-200/100-65-250	16
100-65-315/100-80-160	17
125-100-200/125-100-250	18
125-100-315	19
4 Pole	
50-32-160	19
50-32-200/65-40-200	20
65-40-250/65-40-315	21
65-50-160/80-50-200	22
80-50-250/80-50-315	23
80-65-160/100-65-200	24
100-65-250/100-65-315	25
100-80-160/125-100-200	26
125-100-250/125-100-315	27
125-80-400/125-100-400	28
150-125-250/150-125-315	29
150-125-400/200-150-315	30
200-150-400/250-200-315	31
250-200-400	32
NISO Pump dimensions	33
NISO Pump dimension table	34
NISO Pump set dimension	36
NISO Pump set dimension table	36
NIS, NISF Pump dimensions	41
NIS, NISF Pump dimensions table	41

● Definition of Model

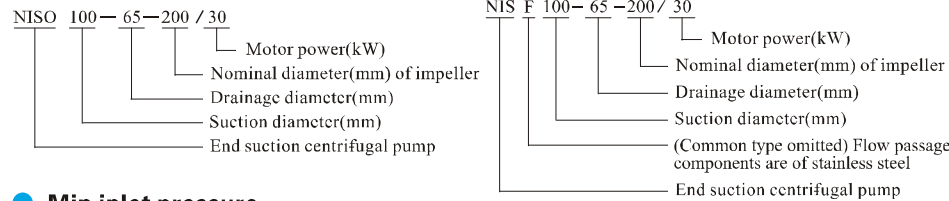

● Min inlet pressure

Min inlet pressure depends on NPSH +0.5m safety margin + gasified pressure. It should be re-calculated the inlet pressure if one of the following happens.

- The liquid is more warm.
- The flow speed exceeds the nominate value.
- Suction distance is very long or inlet pipe is very long.
- System pressure is too little.
- Inlet pressure is low, working pressure is low.

● Typical application

- Clean, thin, non-corrosive, non-flammable or non-explosive liquid without grain or fiber.
- Water supply system
- Heat, air condition system
- Booster, constant pressure water supply
- Firefighting, splitting system
- Irrigating, farming
- Industry cooling, heater circulation system
- Industry transferring, drainage system

● Construction

● Non-self-priming, single stage, single suction, horizontal, axial suction and radical discharge, pump body is fixed by base.

- NISO Pump use bearing cradle, which can orientate bearing, prevent from radical vibration, improve the rigidity of rotary part.
- NISO Pump use compacted shaft, use deep groove grease lubricated roller bearing.
- NISO Pump use connect pump and motor with semi-flexible coupling.
- Use standard wearable mechanical seal.
- TEFC motor, size complies to IEC standard.
- NISO Pump dimensions is conform to ISO 2858.
- NIS, NISF Pump are stub shaft.

● Specification

- Flow: Max 800m³/h
- Head: Max 160m
- Working pressure: Max 16 bar
- Inlet pressure: Max 6 bar
- Power: Max 160kW
- Liquid temperature: -15°C ~ 110°C
- Inlet and Outlet diameter: Inlet diameter: DN50~DN250
Outlet diameter: DN32~DN200



● Curve conditions

- Curves tolerance is according to ISO9906, Annex A;
- All curves are based on the measured value of constant motor speed 2900rpm, 2950rpm, 1450rpm or 1480rpm.
- The measurements were made with airless water at temperature of 20°C. The curves apply to a kinematic viscosity of 1mm²/s(1 est)


● Features

- Back-pull-out design, without having to disturb pump body and pipelines when servicing.
- All the NISO Pump models only use 4 kinds of pump shafts and bearing cover, make many parts exchangeable.
- Impeller is optimum design, inlet is enlarged, no whirlpool, deduct the water pump NPSH efficiently, which makes pump work stable with little noise.
- NIS, NISF Pump are small, compact, easy to install.

● Model performance drawing

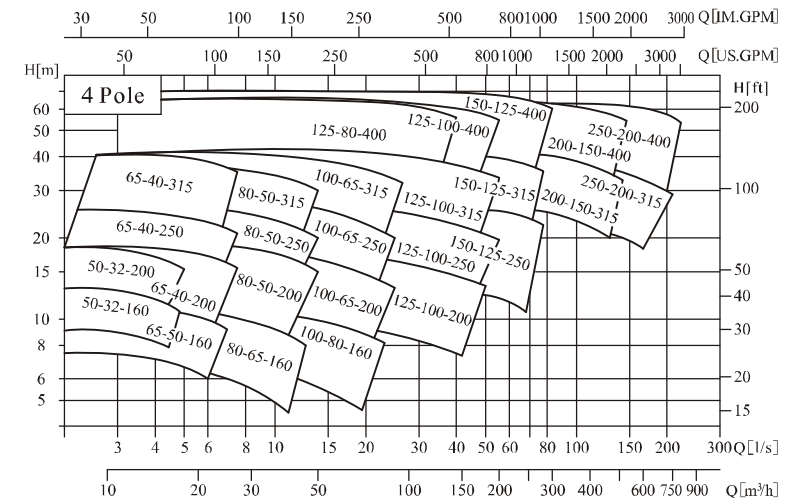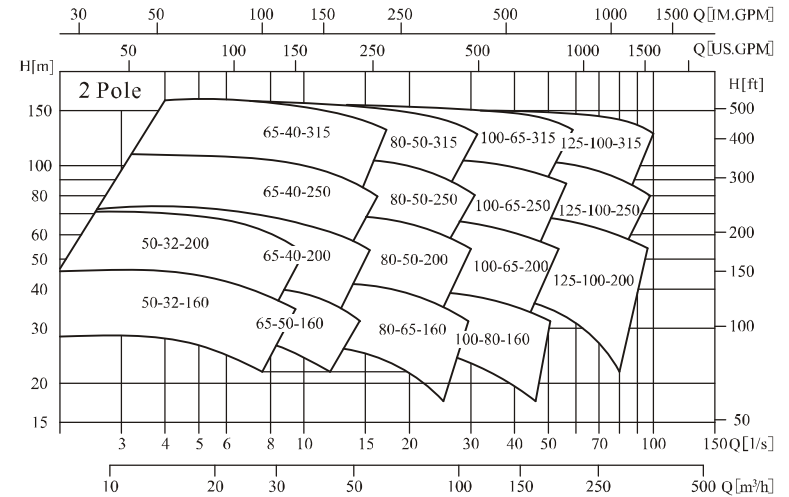


● NISO Sectional drawing

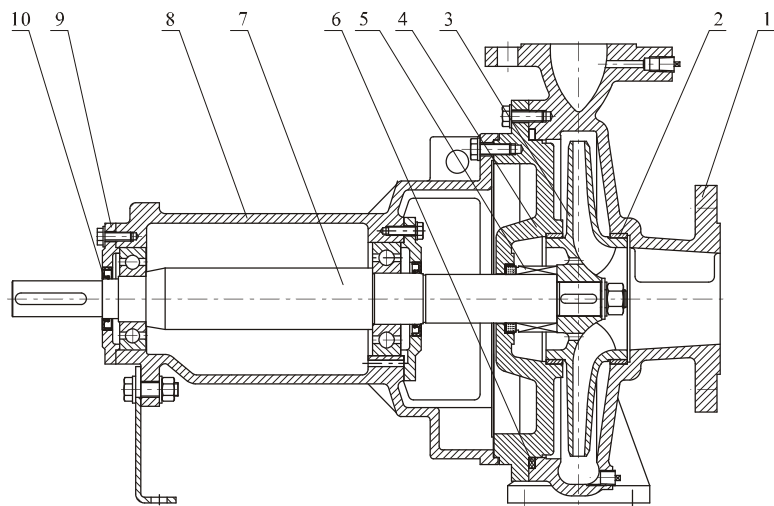

● NISO Part list

No.	Name	Material	Code/AISI/ASTM
1	Casing	Cast Iron HT200	ASTM25B
2	Wear ring	Cast Iron HT200	ASTM25B
3	Impeller	Cast Iron HT200/SS 304	ASTM25B/AISI304
4	Casing cover	Cast Iron HT200	ASTM25B
5	Mechanical seal	Carbon/Silicon Carbide	
6	O ring	NBR	
7	Shaft	SS 20Cr13	AISI420
8	Bearing housing	Cast Iron HT200	ASTM25B
9	Bearing cover	Cast Iron HT200	ASTM25B
10	Oil seal	NBR	

● NIS,NISF Sectional drawing

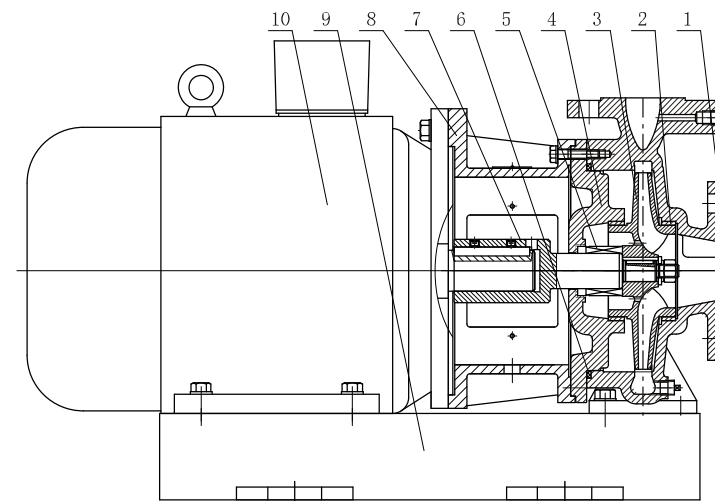

● NIS,NISF Part list

No.	Name	Material	Code/AISI/ASTM
1	Casing	Cast Iron HT200/ZG07Cr19Ni9	ASTM25B/AISI304
3	Impeller	Cast Iron HT200/ZG07Cr19Ni9	ASTM25B/AISI304
4	Casing cover	Cast Iron HT200/ZG07Cr19Ni9	ASTM25B/AISI304
5	Mechanical seal	Carbon/Silicon Carbide	
6	O ring	NBR	
7	Shaft	SS 20Cr13/06Cr19Ni10	AISI304
8	Head	Cast Iron HT200	ASTM25B
9	Baseplate	Q235-A	AISI A570
10	Motor		

General Data

● Models

2 Pole

No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]
1	50-32-160/3	12.5	28	3	2900
2	50-32-160/4		36	4	
3	50-32-160/5.5		44	5.5	
4	50-32-200/7.5		55	7.5	
5	50-32-200/11		74	11	2950
6	65-40-200/7.5	25	48	7.5	2900
7	65-40-200/11		62	11	2950
8	65-40-200/15		72	15	
9	65-40-250/18.5		84	18.5	
10	65-40-250/22		95	22	
11	65-40-250/30		105	30	
12	65-40-315/22		105	22	2900
13	65-40-315/30		120	30	
14	65-40-315/37		145	37	
15	65-40-315/45		165	45	
16	65-50-160/4	28	4	2900	
17	65-50-160/5.5	36	5.5		
18	65-50-160/7.5	42	7.5		
19	80-50-200/11	50	44	11	2950
20	80-50-200/15		57	15	
21	80-50-200/18.5		64	18.5	
22	80-50-200/22		71	22	
23	80-50-250/30		84	30	
24	80-50-250/37		100	37	
25	80-50-315/37		105	37	
26	80-50-315/45		125	45	
27	80-50-315/55		140	55	
28	80-50-315/75		152	75	

General Data

● Models

2 Pole

No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]
29	80-65-160/5.5	50	22	5.5	2900
30	80-65-160/7.5		29	7.5	
31	80-65-160/11		38	11	2950
32	80-65-160/15		44	15	
33	100-65-200/18.5	100	36	18.5	2950
34	100-65-200/22		43	22	
35	100-65-200/30		56	30	
36	100-65-200/37		67	37	
37	100-65-250/45		80	45	
38	100-65-250/55		88	55	
39	100-65-250/75		108	75	
40	100-65-315/90		128	90	
41	100-65-315/110		148	110	
42	100-80-160/11		23	11	
43	100-80-160/15	30	15		
44	100-80-160/18.5	35	18.5		
45	100-80-160/22	40	22		
46	125-100-200/30	34	30		
47	125-100-200/37	41	37		
48	125-100-200/45	48	45		
49	125-100-200/55	55	55		
50	125-100-200/75	66	75		
51	125-100-250/75	75	75		
52	125-100-250/90	86	90		
53	125-100-250/110	100	110		
54	125-100-315/90	93	90		
55	125-100-315/110	108	110		
56	125-100-315/132	124	132		
57	125-100-315/160	144	160		

General Data

General Data

● Models

4 Pole


No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]
1	50-32-160/0.55	6.3	8.5	0.55	1450
2	50-32-160/0.75		11	0.75	
3	50-32-200/1.1		14	1.1	
4	50-32-200/1.5		18	1.5	
5	65-40-200/1.1	12.5	12	1.1	
6	65-40-200/1.5		15	1.5	
7	65-40-200/2.2		17.5	2.2	
8	65-40-250/3		25	3	
9	65-40-315/4		34	4	
10	65-40-315/5.5		40	5.5	
11	65-50-160/0.55		7	0.55	
12	65-50-160/0.75		9	0.75	
13	65-50-160/1.1		10.5	1.1	
14	80-50-200/1.5		25	11	1.5
15	80-50-200/2.2			15	2.2
16	80-50-200/3	17.5		3	
17	80-50-250/4	21		4	
18	80-50-250/5.5	25		5.5	
19	80-50-315/5.5	30		5.5	
20	80-50-315/7.5	37		7.5	
21	80-65-160/0.75	6		0.75	
22	80-65-160/1.1	8		1.1	
23	80-65-160/1.5	10.5		1.5	
24	100-65-200/3	50		11.5	3
25	100-65-200/4		14	4	
26	100-65-200/5.5		16	5.5	
27	100-65-250/5.5		20	5.5	
28	100-65-250/7.5		25	7.5	
29	100-65-315/11		32	11	
30	100-65-315/15		40	15	
31	100-80-160/1.5		6.5	1.5	
32	100-80-160/2.2		9	2.2	
33	100-80-160/3		10.5	3	

● Models




4 Pole

No.	Model	Q [m³/h]	H [m]	Motor [kW]	n [r/min]	
34	125-80-400/15	50	39	15	1480	
35	125-80-400/18.5		45	18.5		
36	125-80-400/22		50	22		
37	125-80-400/30		60	30		
38	125-80-400/37		67	37		
39	125-100-200/4	100	9	4	1450	
40	125-100-200/5.5		11.5	5.5		
41	125-100-200/7.5		14	7.5		
42	125-100-200/11		16.5	11		
43	125-100-250/15		25	15		
44	125-100-315/11		23	11		
45	125-100-315/18.5		32	18.5		
46	125-100-315/22		36	22		
47	125-100-315/30		40	30		
48	125-100-400/30		50	30		
49	125-100-400/37		58	37		
50	125-100-400/45	65	45			
51	150-125-250/11	200	12.5	11	1480	
52	150-125-250/15		16	15		
53	150-125-250/18.5		20	18.5		
54	150-125-250/22		24	22		
55	150-125-315/30		32	30		
56	150-125-315/37		39	37		
57	150-125-400/45		50	45		
58	150-125-400/55		57	55		
59	150-125-400/75		68	75		
60	200-150-315/37		400	23		37
61	200-150-315/45			27		45
62	200-150-315/55	32		55		
63	200-150-315/75	38		75		
64	200-150-400/75	43		75		
65	200-150-400/90	50		90		
66	200-150-400/110	62		110		
67	250-200-315/37	500		20	37	
68	250-200-315/45			23	45	
69	250-200-315/55			24	55	
70	250-200-315/75			32	75	
71	250-200-400/90		37	90		
72	250-200-400/110		44	110		
73	250-200-400/132		53	132		
74	250-200-400/160		60	160		


● 50-32-160/50-32-200

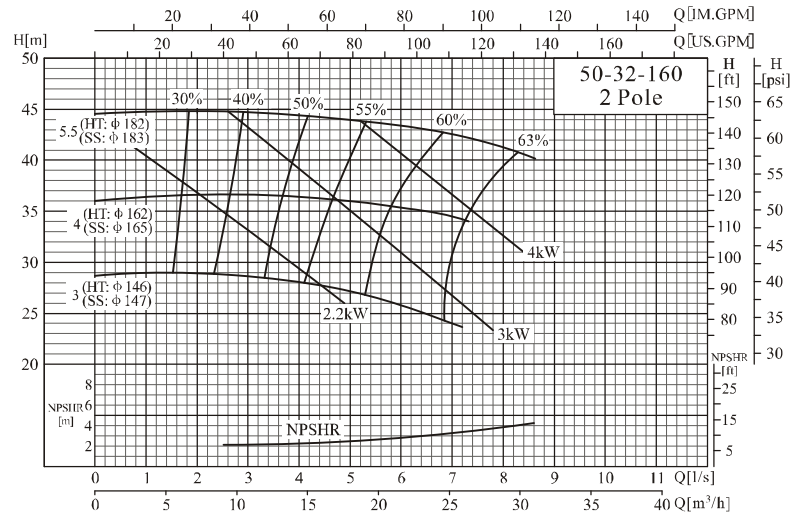




● 65-40-200/65-40-250

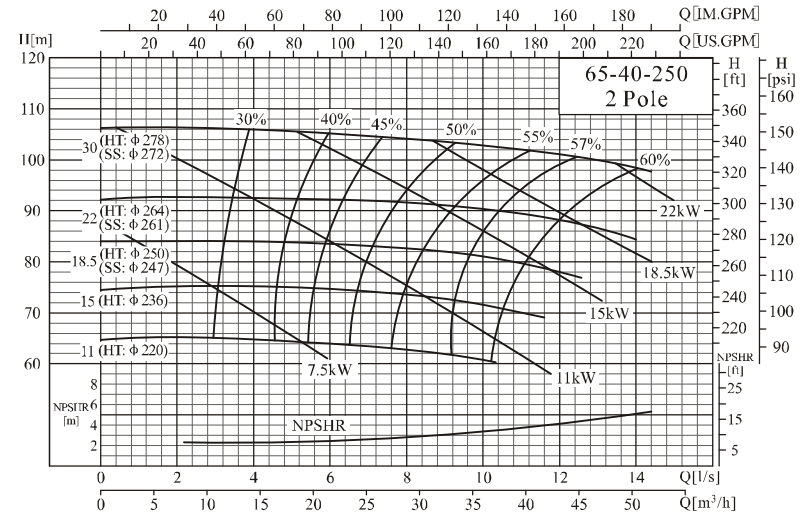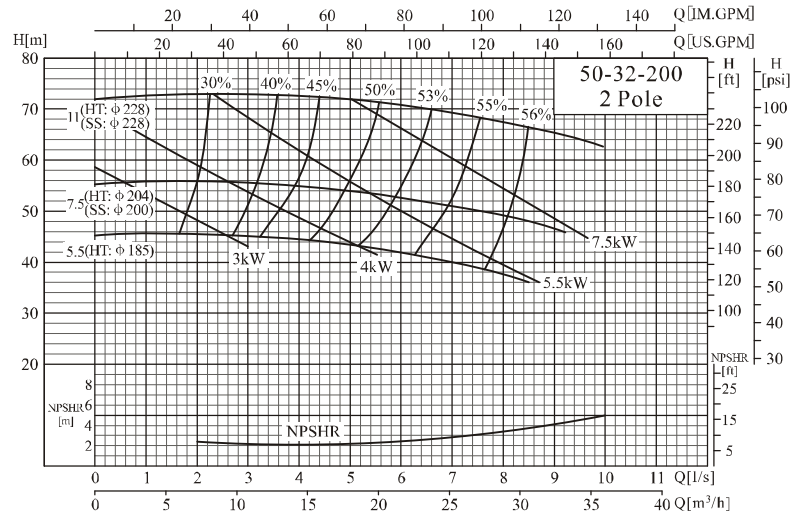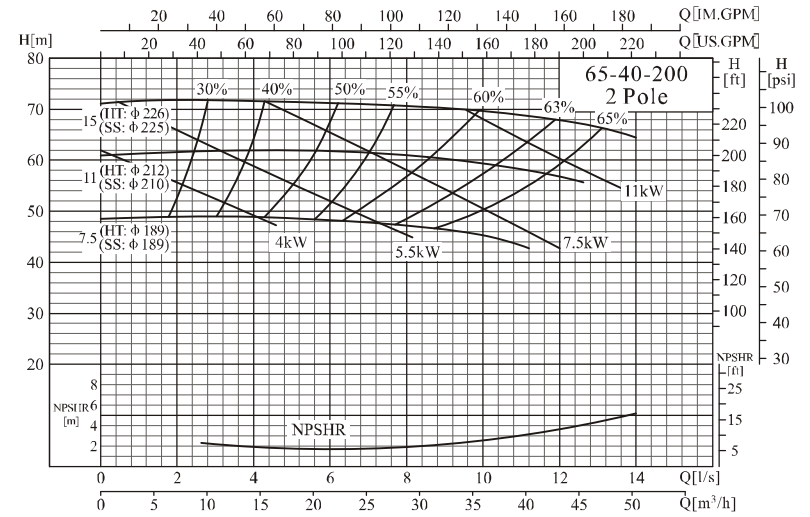


● 65-40-315/65-50-160

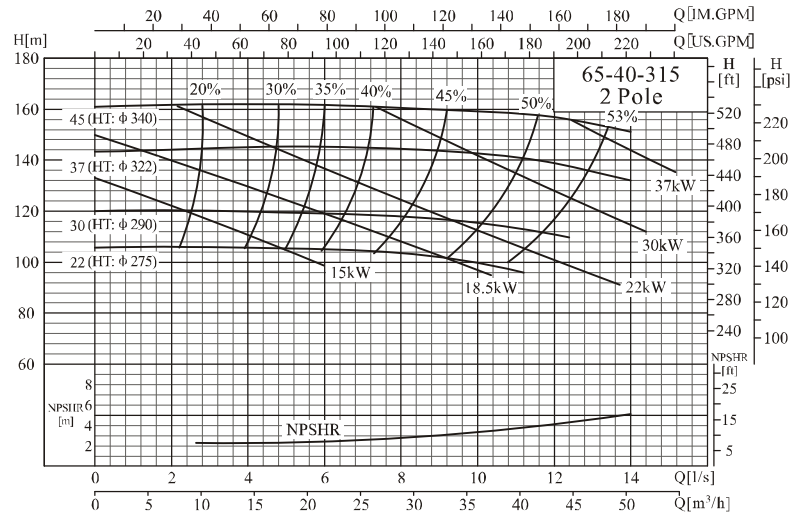




● 80-50-200/80-50-250

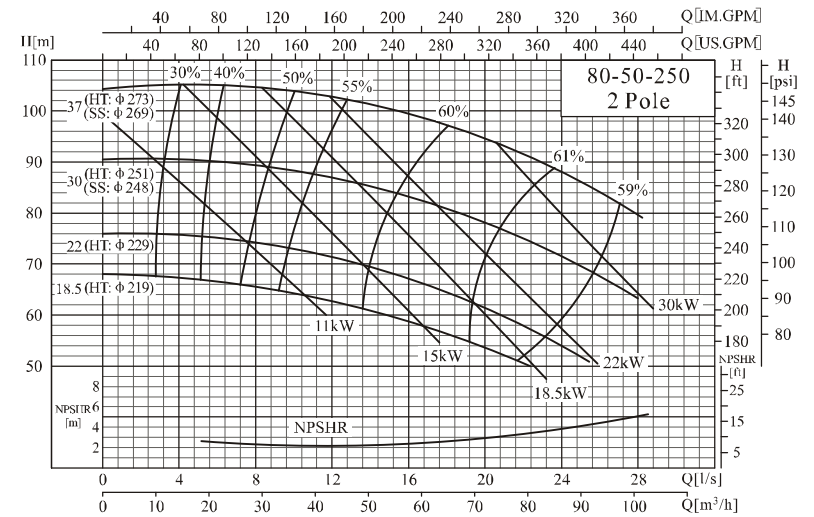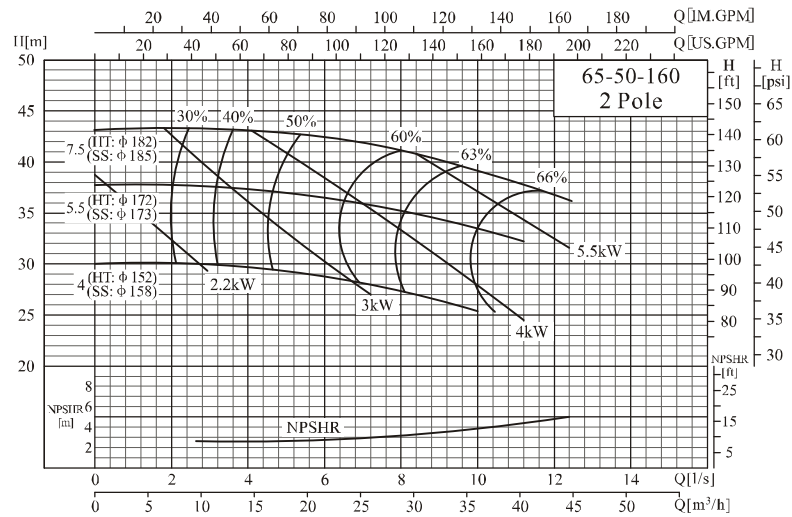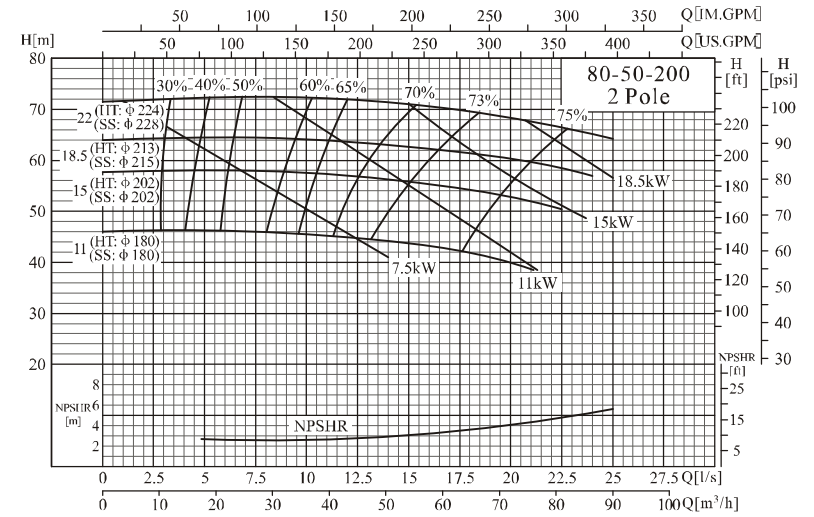


● 80-50-315/80-65-160

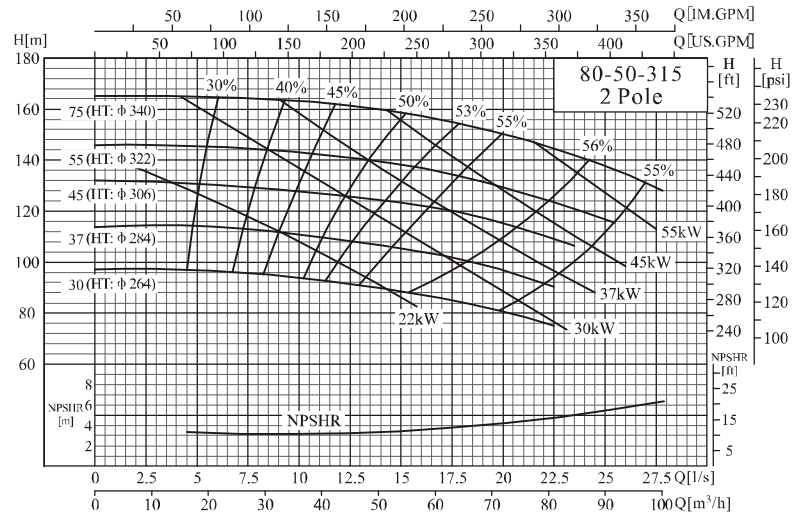




● 100-65-200/100-65-250

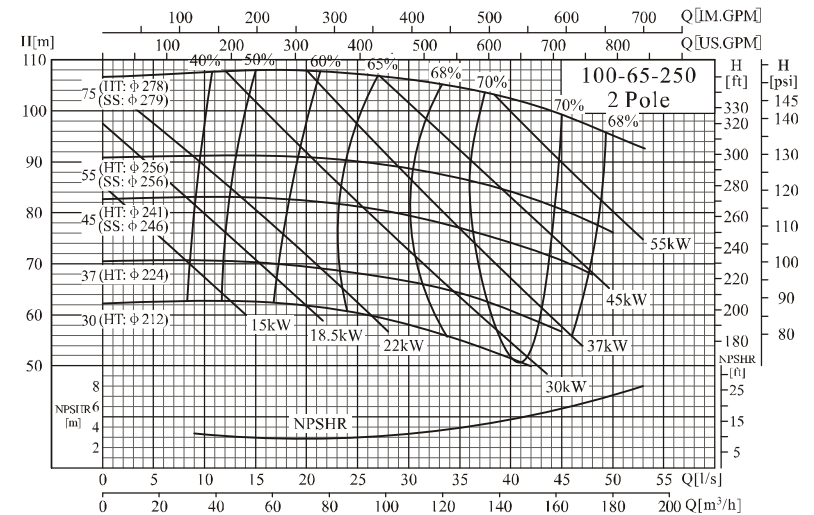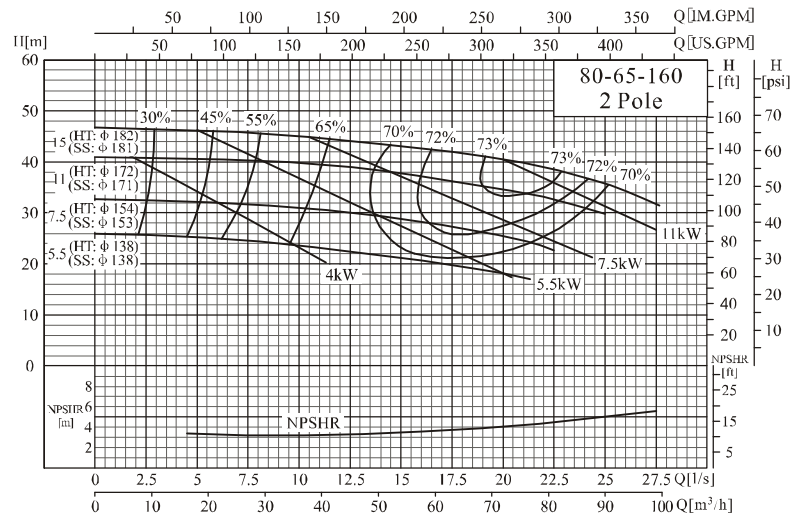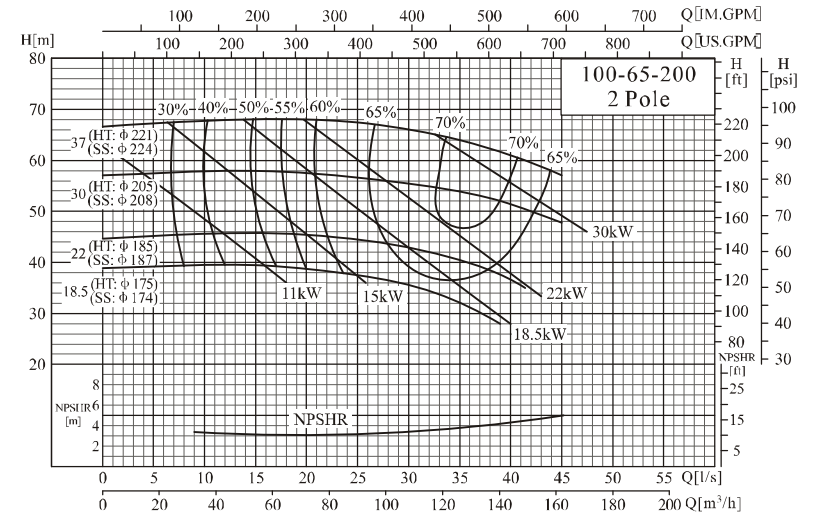


● 100-65-315/100-80-160

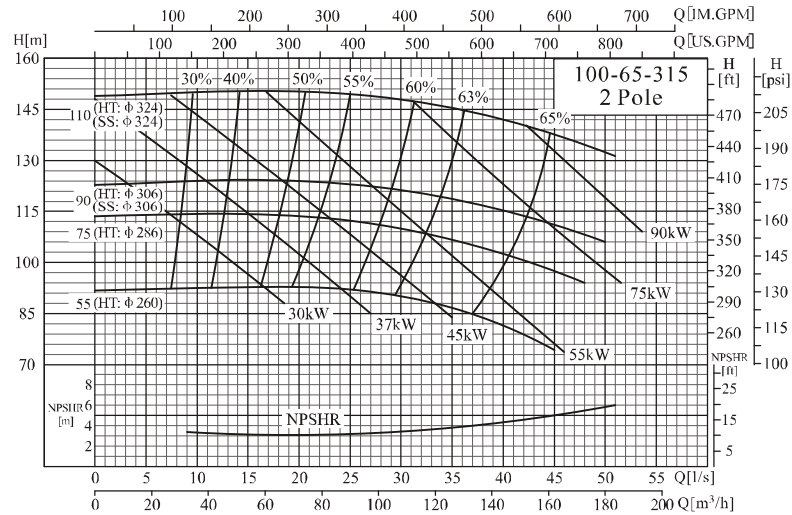




● 125-100-200/125-100-250

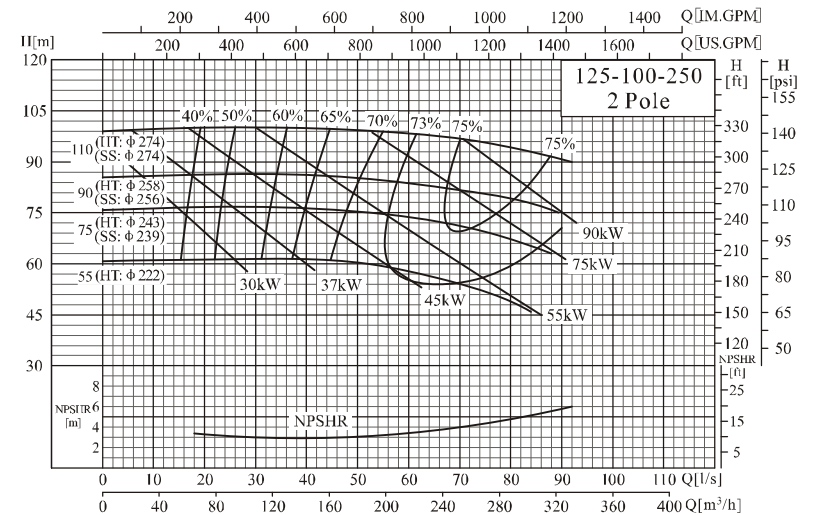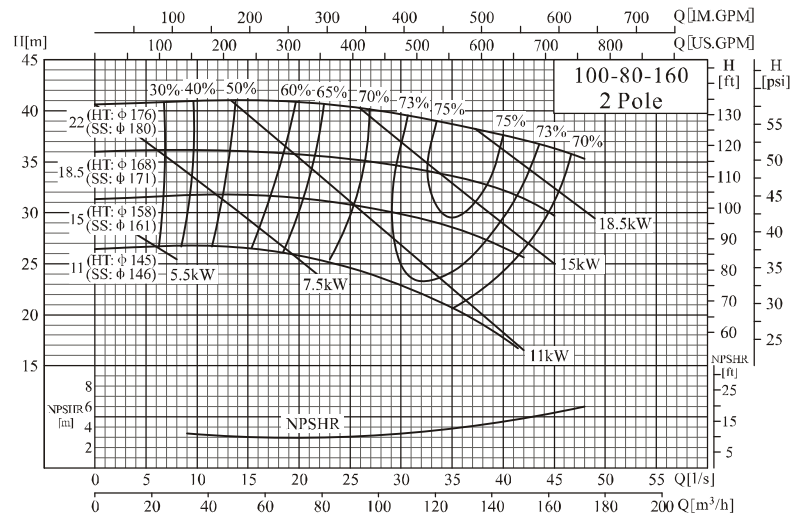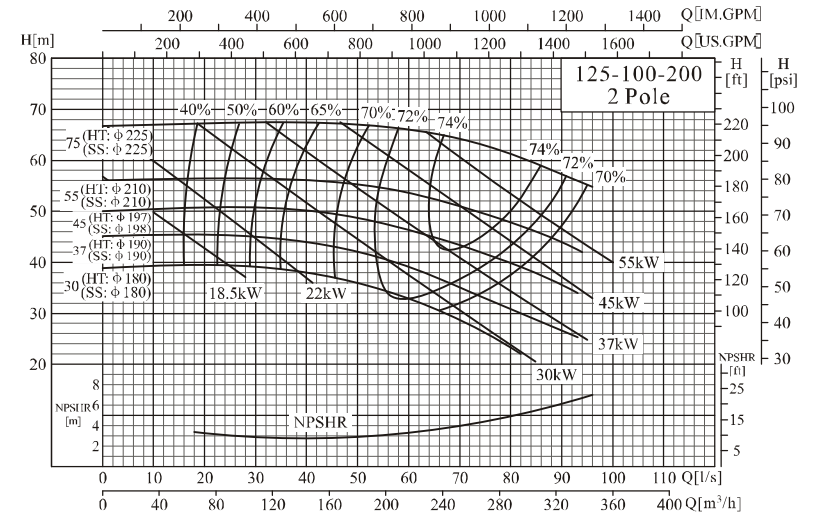


● 125-100-315/50-32-160

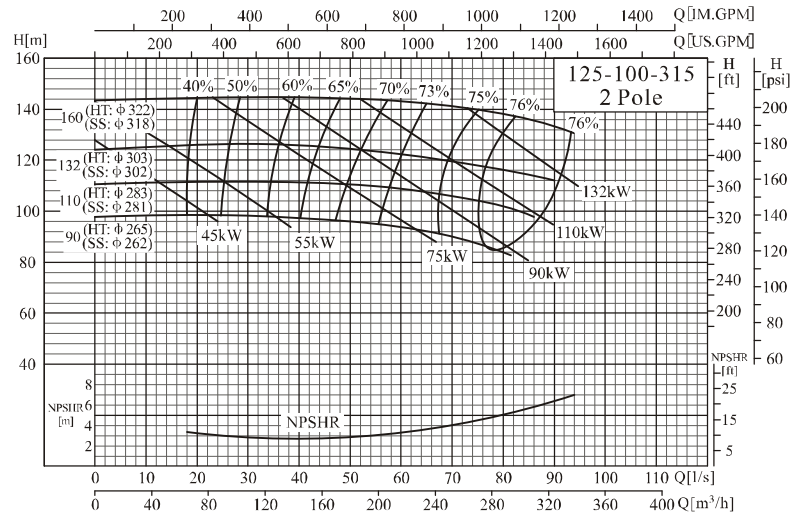




● 50-32-200/65-40-200

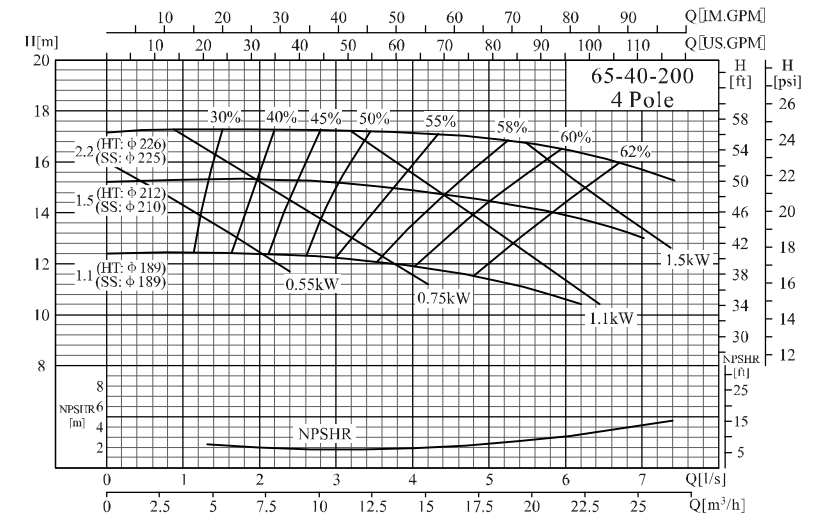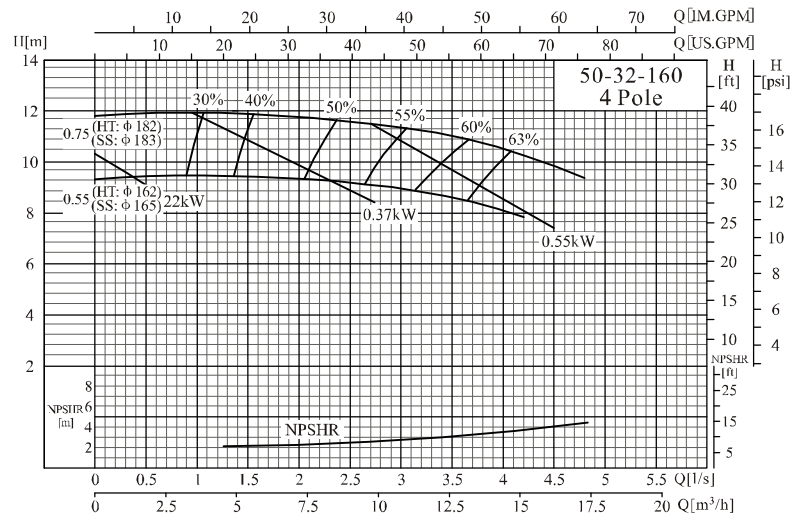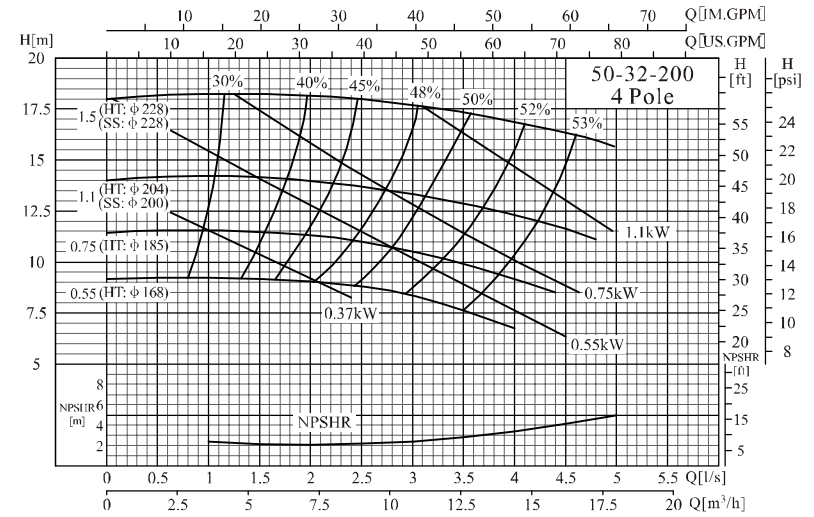


● 65-40-250/65-40-315

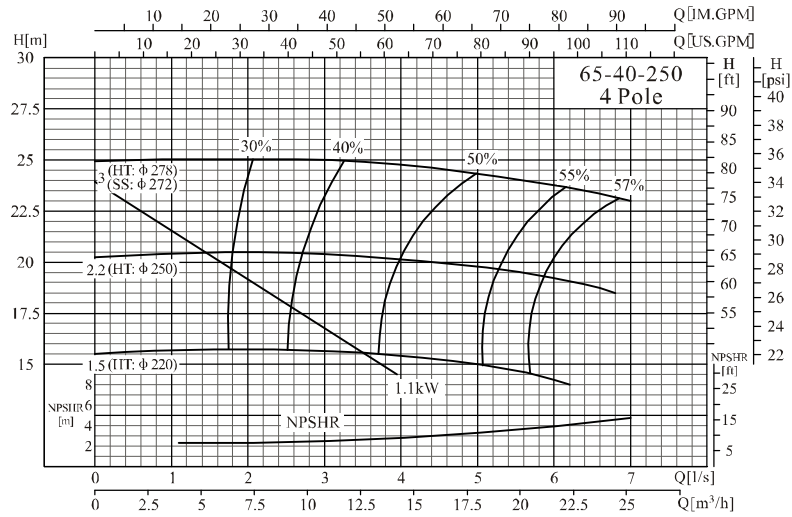




● 65-50-160/80-50-200

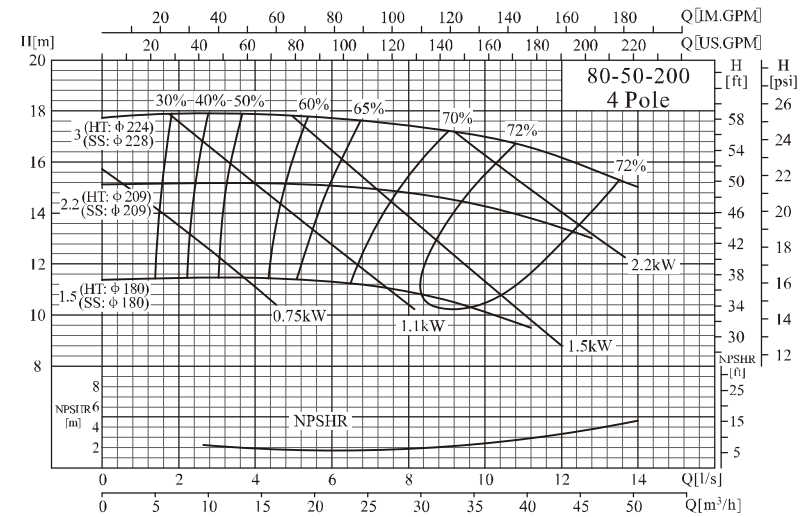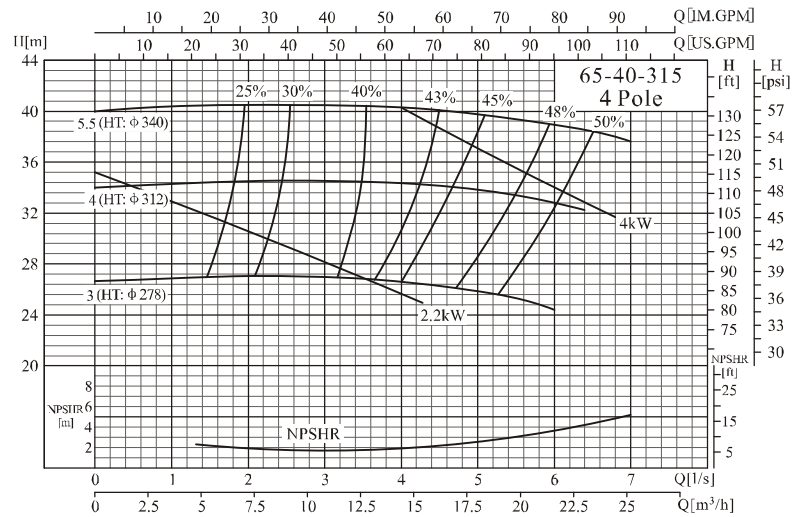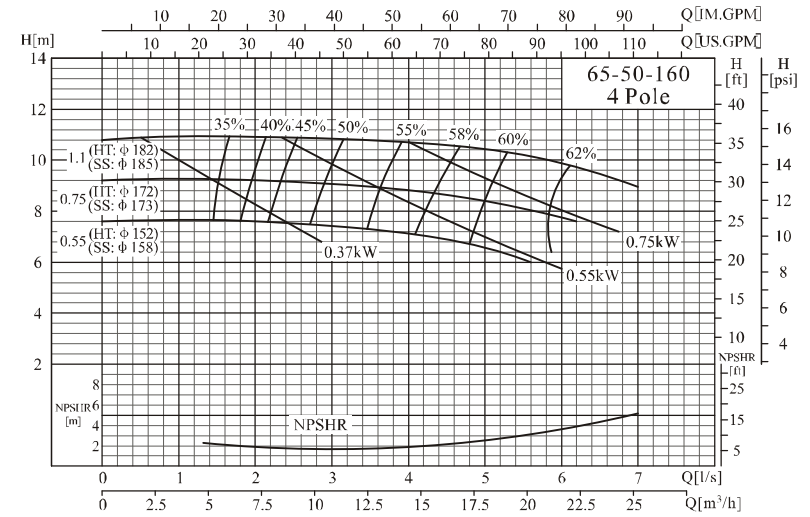


● 80-50-250/80-50-315

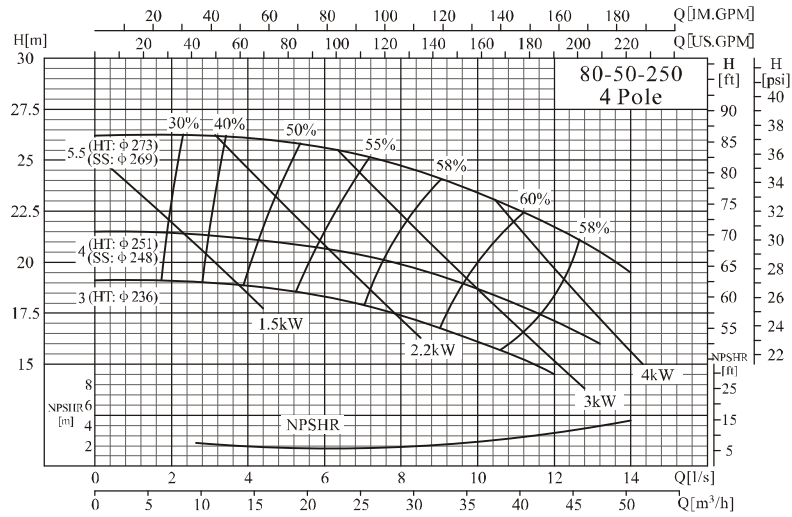




● 80-65-160/100-65-200

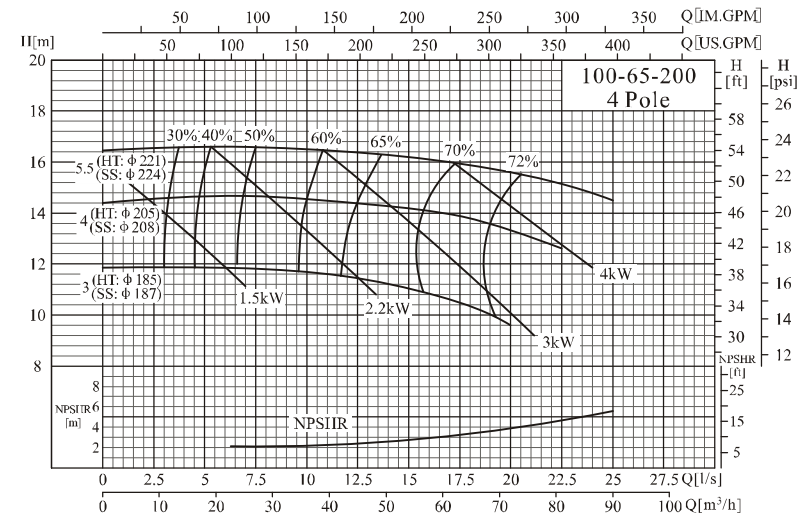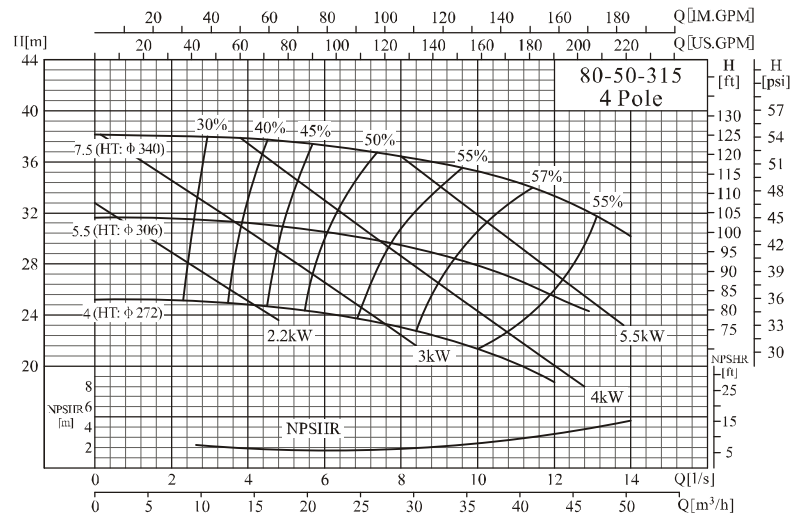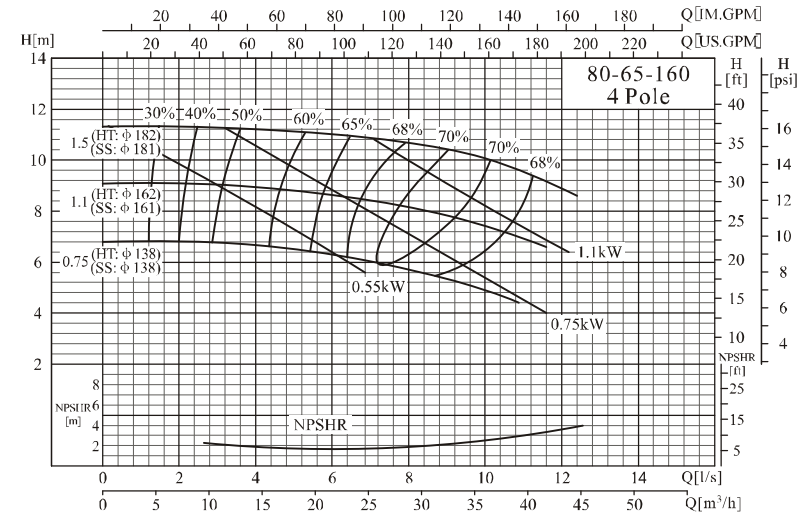


● 100-65-250/100-65-315

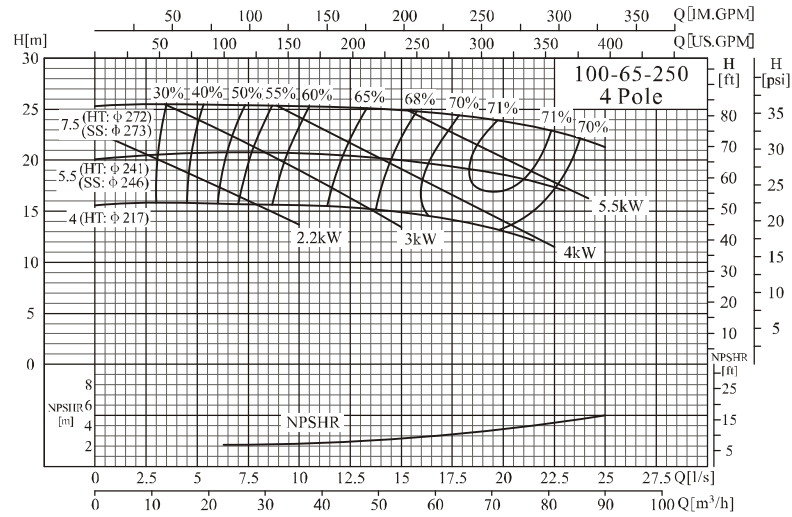




● 100-80-160/125-100-200

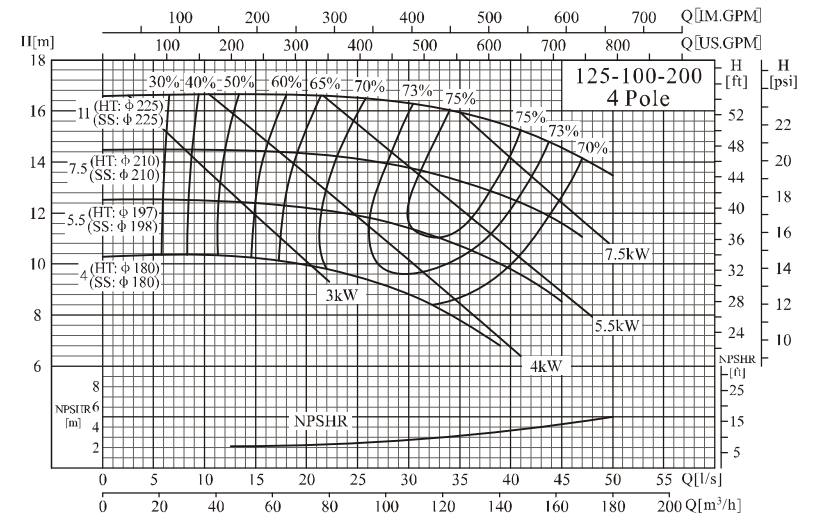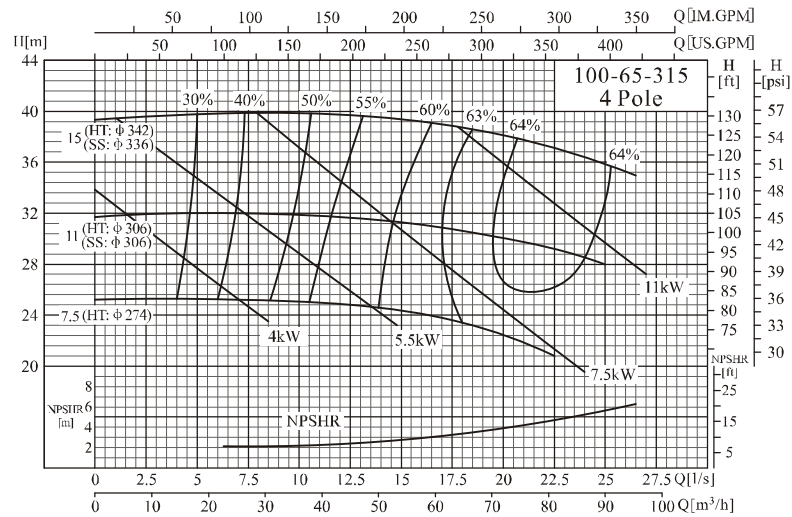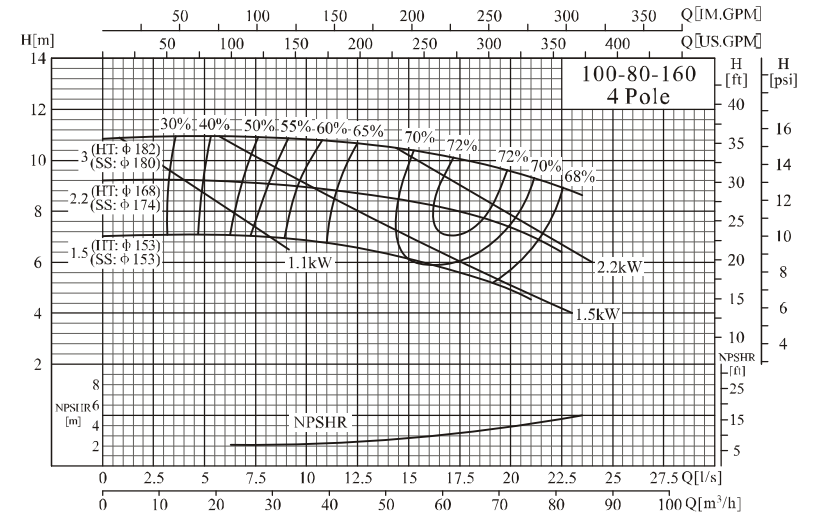


● 125-100-250/125-100-315

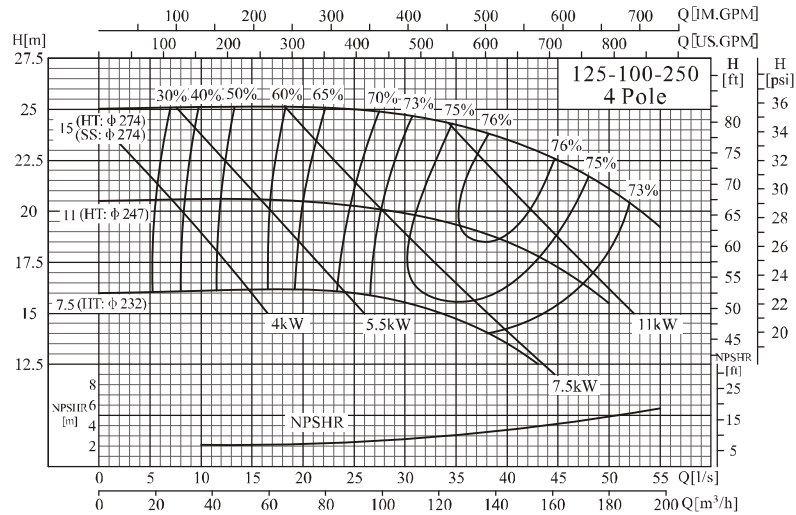




● 125-80-400/125-100-400

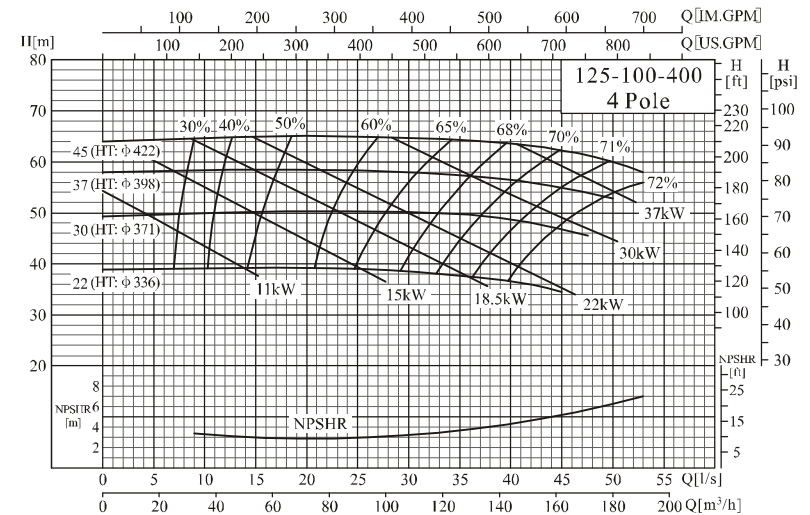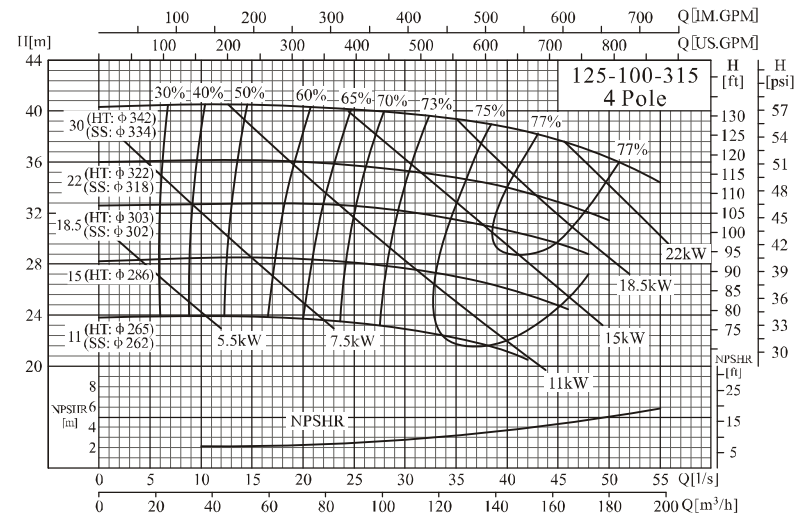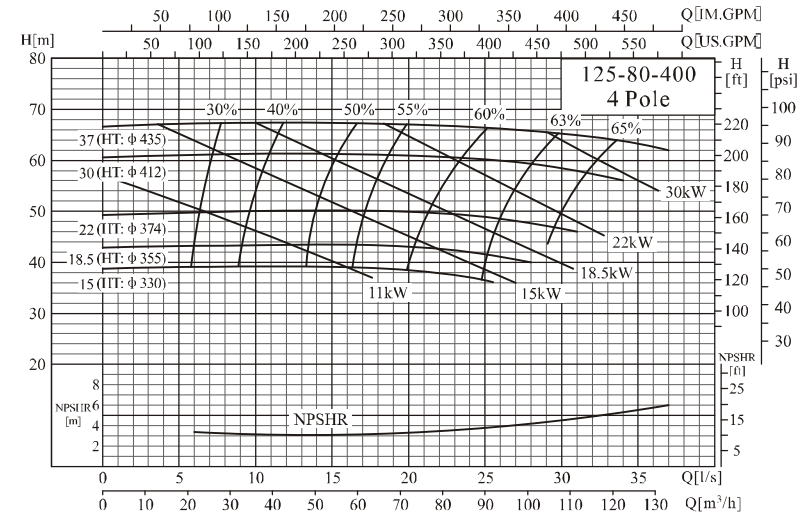


● 150-125-250/150-125-315

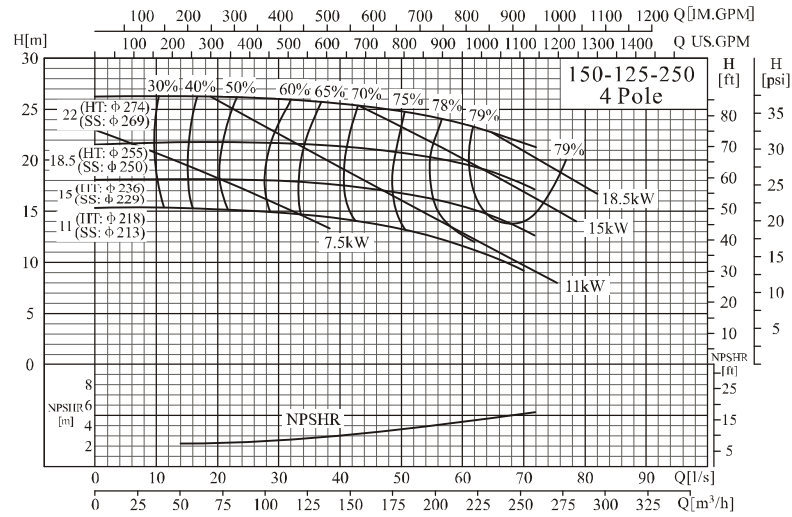



● 150-125-400/200-150-315

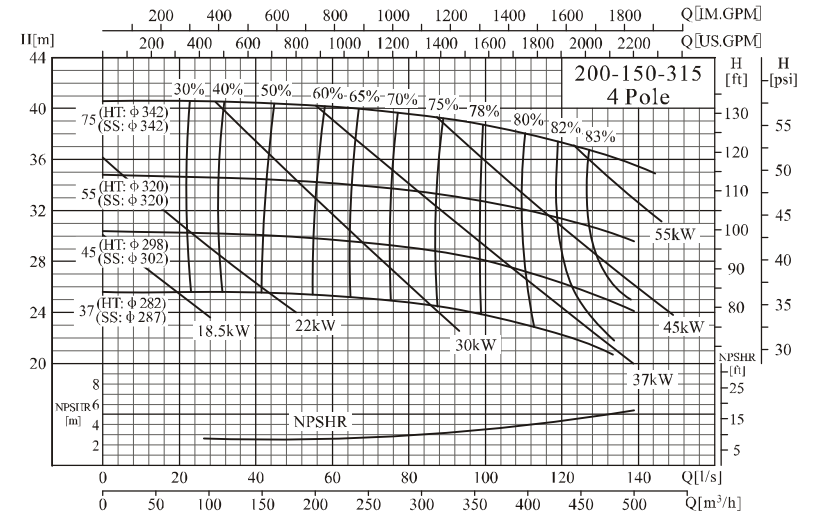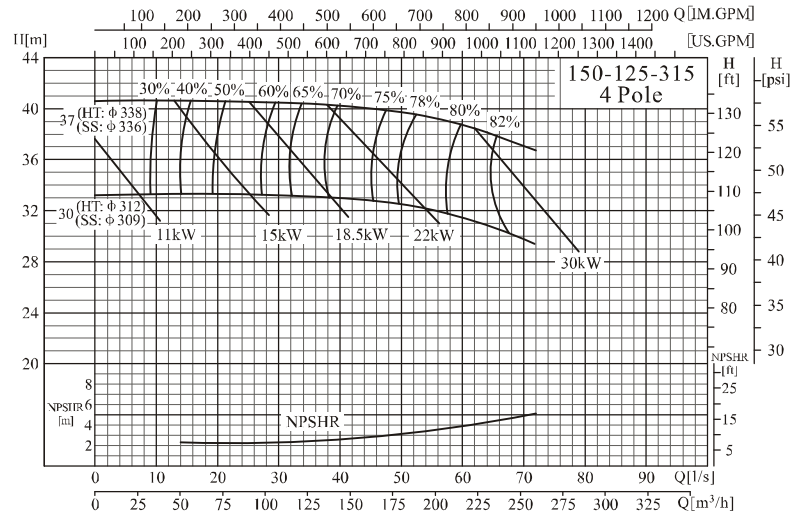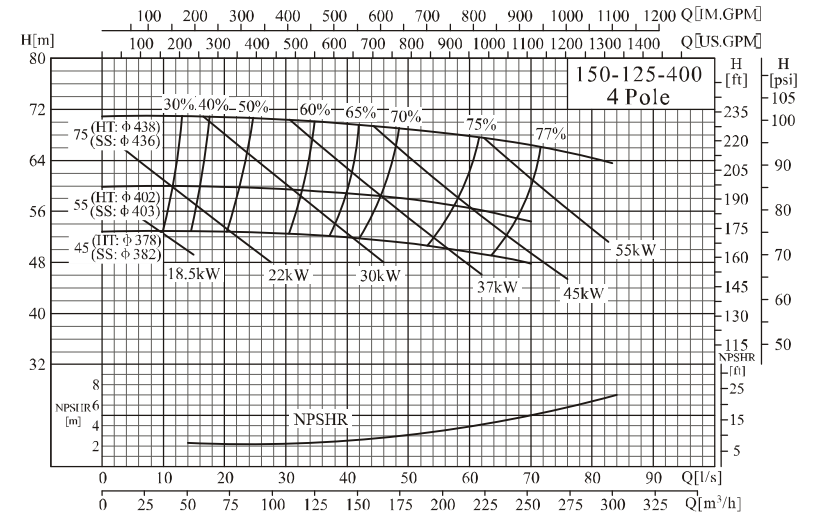


● 200-150-400/250-200-315

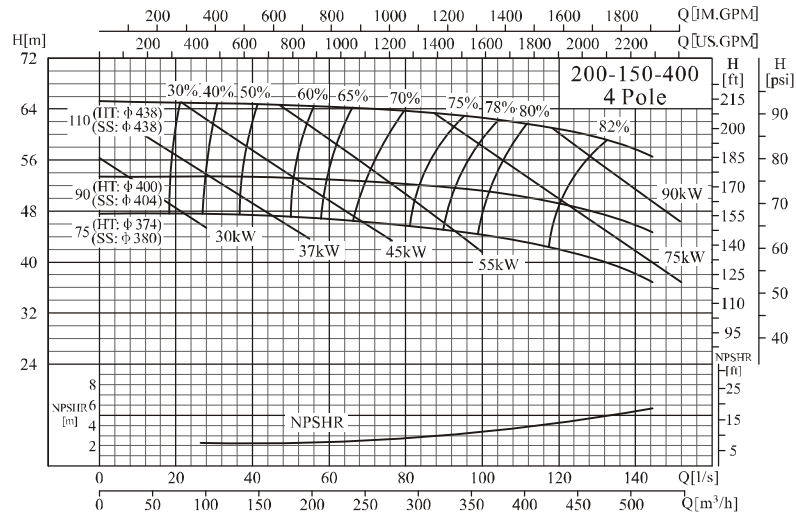

● 250-200-400

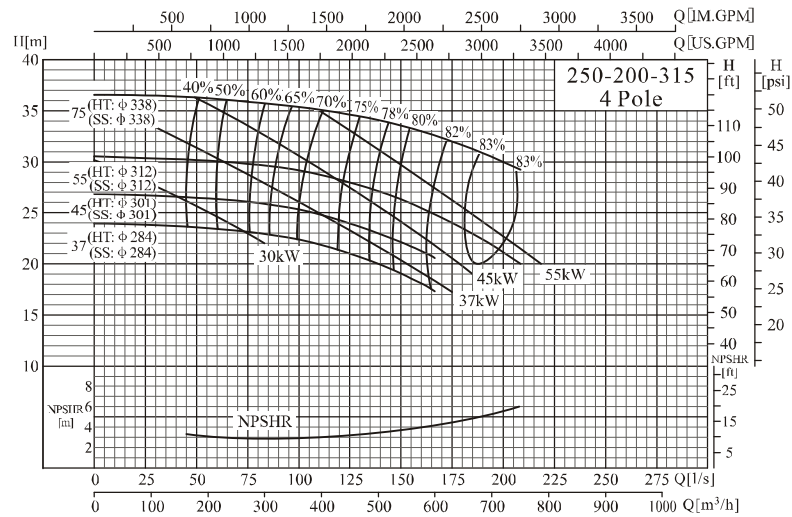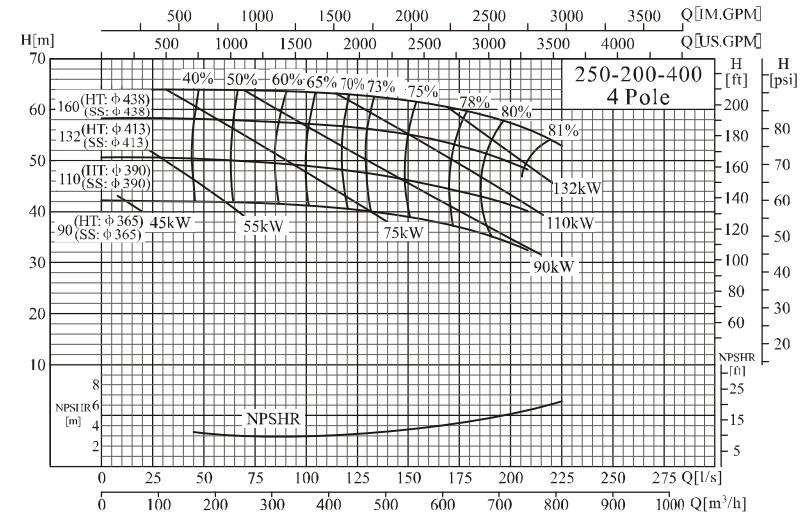

● NISO Pump dimensions

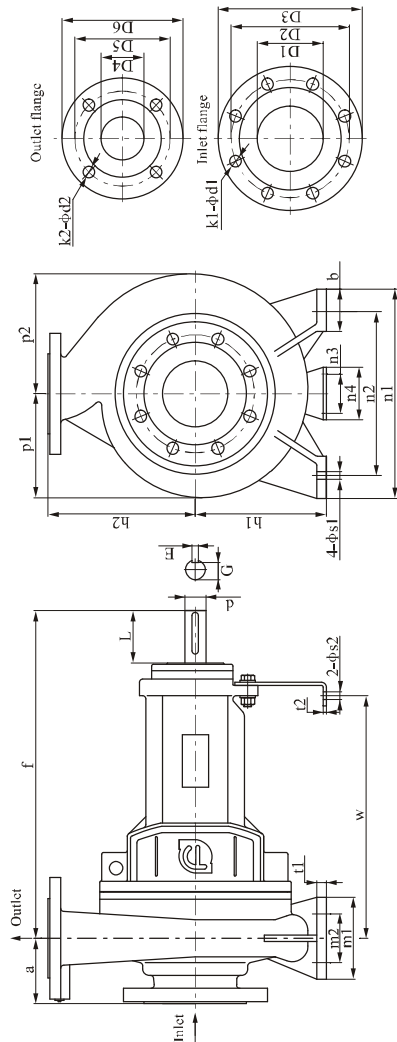


● NISO Pump dimension table

No.	Model	Pump size						Installation dimension											
		a	f	h1	h2	b	p1	p2	m1	m2	n1	n2	n3	n4	t1	t2	w	s1	s2
1	50-32-160	80	385	132	160	50	118	128	100	70	240	190	110	160	12	6	285	14	14
2	50-32-200	80	385	160	180	50	139	147	100	70	240	190	110	160	12	6	285	14	14
3	65-50-160	80	385	132	160	50	121	136	100	70	240	190	110	160	12	6	285	14	14
4	65-40-200	100	385	160	180	50	140	151	100	70	265	212	110	160	13	6	285	14	14
5	65-40-250	100	500	180	225	65	166	176	125	95	320	250	110	160	14	6	370	14	14
6	65-40-315	125	500	200	250	65	194	200	125	95	345	280	110	160	16	6	370	14	14
7	80-65-160	100	385	160	180	50	124	143	100	70	265	212	110	160	13	6	285	14	14
8	80-50-200	100	385	160	200	52	147	161	100	70	265	212	110	160	13	6	285	14	14
9	80-50-250	125	500	180	225	65	167	179	125	95	320	250	110	160	15	6	370	14	14
10	80-50-315	125	500	225	280	65	204	215	125	95	345	280	110	160	18	6	370	14	14
11	100-65-200	100	500	180	225	65	159	183	125	95	320	250	110	160	14	6	370	14	14
12	100-65-250	125	500	200	250	80	180	201	160	120	360	280	110	160	16	6	370	18	14
13	100-65-315	125	530	225	280	80	210	228	160	120	400	315	110	160	18	6	370	18	14
14	100-80-160	100	500	160	200	65	132	160	125	95	280	212	110	160	14	6	370	14	14
15	125-80-400	125	530	280	355	80	261	279	160	120	435	355	110	160	20	6	370	18	14
16	125-100-200	125	500	200	280	80	175	210	160	120	360	280	110	160	17	6	370	18	14
17	125-100-250	140	530	225	280	80	193	225	160	120	400	315	110	160	18	6	370	18	14
18	125-100-315	140	530	250	315	80	224	250	160	120	400	315	110	160	19	6	370	18	14
19	125-100-400	140	530	280	355	100	265	287	200	150	500	400	110	160	20	6	370	18	14
20	150-125-250	140	530	250	355	80	204	244	160	120	400	315	110	160	19	6	370	18	14
21	150-125-315	140	530	280	355	100	236	271	200	150	500	400	110	160	20	6	370	22	14
22	150-125-400	140	530	315	400	100	273	301	200	150	500	400	110	160	21	6	370	22	14
23	200-150-315	160	670	315	400	82	255	304	200	150	515	450	140	180	25	10	500	22	18
24	200-150-400	160	670	315	450	82	291	330	200	150	515	450	140	180	25	10	500	22	18
25	250-200-315	180	670	315	450	82	278	344	200	150	515	450	140	180	25	10	500	22	18
26	250-200-400	180	670	380	450	82	314	367	200	150	515	450	140	180	25	10	500	22	18

● To be continued

No.	Model	Inlet flange size					Outlet flange size					Size of pump shaft extension				Weight (kg)
		D1	D2	D3	k1	d1	D4	D5	D6	k2	d2	D	L	E	G	
1	50-32-160	50	125	165	4	18	32	100	140	4	18	24	50	8	20	40
2	50-32-200	50	125	165	4	18	32	100	140	4	18	24	50	8	20	48
3	65-50-160	65	145	185	4	18	50	125	165	4	18	24	50	8	20	42
4	65-40-200	65	145	185	4	18	40	110	150	4	18	24	50	8	20	50
5	65-40-250	65	145	185	4	18	40	110	150	4	18	32	80	10	27	72
6	65-40-315	65	145	185	4	18	40	110	150	4	18	32	80	10	27	82
7	80-65-160	80	160	200	8	18	65	145	185	4	18	24	50	8	20	48
8	80-50-200	80	160	200	8	18	50	125	165	4	18	24	50	8	20	54
9	80-50-250	80	160	200	8	18	50	125	165	4	18	32	80	10	27	75
10	80-50-315	80	160	200	8	18	50	125	165	4	18	32	80	10	27	90
11	100-65-200	100	180	220	8	18	65	145	185	4	18	32	80	10	27	73
12	100-65-250	100	180	220	8	18	65	145	185	4	18	32	80	10	27	82
13	100-65-315	100	180	220	8	18	65	145	185	4	18	42	110	12	37	120
14	100-80-160	100	180	220	8	18	80	160	200	8	18	32	80	10	27	70
15	125-80-400	125	210	250	8	18	80	160	200	8	18	42	110	12	37	168
16	125-100-200	125	210	250	8	18	100	180	220	8	18	32	80	10	27	88
17	125-100-250	125	210	250	8	18	100	180	220	8	18	42	110	12	37	130
18	125-100-315	125	210	250	8	18	100	180	220	8	18	42	110	12	37	138
19	125-100-400	125	210	250	8	18	100	180	220	8	18	42	110	12	37	178
20	150-125-250	150	240	285	8	22	125	210	250	8	18	42	106	12	37	134
21	150-125-315	150	240	285	8	22	125	210	250	8	18	42	106	12	37	167
22	150-125-400	150	240	285	8	22	125	210	250	8	18	42	106	12	37	186
23	200-150-315	200	295	340	12	22	150	240	285	8	22	60	110	18	53	228
24	200-150-400	200	295	340	12	22	150	240	285	8	22	60	110	18	53	285
25	250-200-315	250	355	405	12	26	200	295	340	12	22	60	110	18	53	264
26	250-200-400	250	355	405	12	26	200	295	340	12	22	60	110	18	53	335

● NISO Pump set dimension

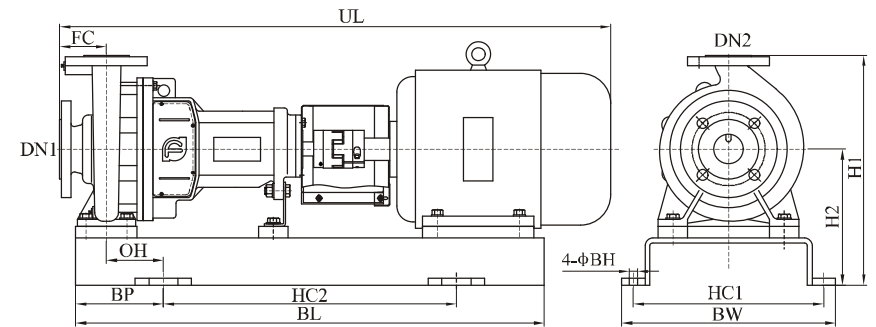

● NISO Pump set dimension table

Model	Power (kW)	2 Pole													
		H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
50-32-160	3	392	232	296	500	336	750	125	14	72.5	857	80	50	32	94
	4	392	232	296	500	336	750	125	14	72.5	875	80	50	32	100
	5.5	392	232	325	500	365	800	150	14	97.5	941	80	50	32	124
50-32-200	7.5	440	243	340	600	380	860	130	14	77.5	941	80	50	32	139
	11	440	260	380	600	420	950	175	18	121	1077	80	50	32	195
65-40-200	7.5	440	260	325	500	365	800	150	14	97.5	961	100	65	40	140
	11	440	260	380	600	420	950	175	18	121	1097	100	65	40	197
	15	440	260	380	600	420	950	175	18	121	1097	100	65	40	207
65-40-250	18.5	505	280	380	800	420	1080	140	18	73.5	1282	100	65	40	253
	22	505	280	420	800	480	1100	150	18	81.5	1319	100	65	40	289
	30	525	300	460	800	500	1180	190	18	121.5	1379	100	65	40	349
65-40-315	22	550	300	420	800	460	1100	150	18	81.5	1344	125	65	40	301
	30	570	320	455	800	495	1200	200	18	131.5	1412	125	65	40	372
	37	570	320	455	800	495	1200	200	18	131.5	1412	125	65	40	391
65-50-160	45	590	340	510	800	560	1250	225	22	155	1466	125	65	40	459
	4	392	232	296	500	336	750	125	14	72.5	875	80	65	50	102
	5.5	392	232	325	500	365	800	150	14	97.5	941	80	65	50	126
65-50-200	7.5	392	232	325	500	365	800	150	14	97.5	941	80	65	50	129

● To be continued

2 Pole

Model	Power (kW)	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
80-50-200	11	460	260	380	600	420	950	175	18	121	1097	100	80	50	201
	15	460	260	380	600	420	950	175	18	121	1097	100	80	50	211
	18.5	460	260	380	600	420	950	175	18	121	1137	100	80	50	230
	22	480	280	420	700	460	1000	150	18	96	1194	100	80	50	273
80-50-250	30	525	300	460	800	500	1180	190	18	121.5	1404	125	80	50	351
	37	525	300	460	800	495	1180	190	18	121.5	1404	125	80	50	370
80-50-315	37	625	345	455	800	495	1200	200	18	131.5	1402	125	80	50	402
	45	625	345	510	800	560	1250	225	22	155	1466	125	80	50	466
	55	650	370	575	900	625	1300	200	22	130	1547	125	80	50	566
80-65-160	75	680	400	620	800	670	1400	300	22	230	1620	125	80	50	706
	5.5	440	260	325	500	365	800	150	14	97.5	961	100	80	65	135
	7.5	440	260	325	500	365	800	150	14	97.5	961	100	80	65	138
	11	440	260	380	600	420	950	175	18	121	1097	100	80	65	195
100-65-200	15	440	260	380	600	420	950	175	18	121	1097	100	80	65	205
	18.5	505	280	380	800	420	1080	140	18	73.5	1282	100	100	65	253
	22	505	280	420	800	460	1100	150	18	81.5	1319	100	100	65	289
	30	525	300	460	800	500	1180	190	18	121.5	1379	100	100	65	349
100-65-250	37	525	300	460	800	500	1180	190	18	121.5	1379	100	100	65	368
	45	590	340	510	800	550	1250	225	22	141.5	1466	125	100	65	458
	55	620	370	575	900	625	1350	225	22	141.5	1547	125	100	65	561
100-65-315	75	650	400	620	800	670	1400	300	22	214	1620	125	100	65	704
	90	680	400	620	900	670	1450	275	22	189	1700	125	100	65	781
	110	720	440	710	1000	760	1500	250	22	164	1909	125	100	65	1212
100-80-160	11	460	260	380	800	420	1080	140	18	73.5	1212	100	100	80	209
	15	460	260	380	800	420	1080	140	18	73.5	1212	100	100	80	219
	18.5	460	260	380	800	420	1080	140	18	73.5	1282	100	100	80	239
	22	480	280	420	800	460	1100	150	18	83.5	1319	100	100	80	280
125-100-200	30	600	320	455	800	495	1200	200	18	119	1412	125	125	100	380
	37	600	320	455	800	495	1200	200	18	119	1412	125	125	100	399
	45	620	340	510	800	560	1250	225	22	141.5	1466	125	125	100	463
	55	650	370	575	900	625	1350	225	22	141.5	1547	125	125	100	566
125-100-250	75	680	400	620	800	670	1400	300	22	214	1620	125	125	100	709

● To be continued

2 Pole

Model	Power (kW)	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
125-100-250	75	680	400	620	800	670	1400	300	22	214	1665	140	125	100	752
	90	680	400	620	900	670	1450	275	22	189	1715	140	125	100	789
	110	720	440	710	1000	760	1500	250	22	164	1924	140	125	100	1220
125-100-315	90	715	400	620	900	670	1450	275	22	189	1715	140	125	100	795
	110	755	440	710	1000	760	1500	250	22	164	1909	140	125	100	1221
	132	755	440	710	1000	760	1560	280	22	194	2034	140	125	100	1281
125-100-315	160	755	440	710	1000	760	1560	280	22	194	2034	140	125	100	1401

● Pump set dimension table

4 Pole

Model	Power (kW)	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
50-32-160	0.55	392	232	296	500	336	700	100	14	47.5	755	80	50	32	63
	0.75	392	232	296	500	336	700	100	14	47.5	755	80	50	32	64
50-32-200	1.1	440	260	296	500	336	750	125	14	72.5	794	80	50	32	90
	1.5	440	260	296	500	336	750	125	14	72.5	819	80	50	32	97
65-40-200	1.1	440	260	325	500	365	750	125	14	72.5	824	100	65	40	92
	1.5	440	260	325	500	365	750	125	14	72.5	849	100	65	40	99
65-40-250	2.2	440	260	325	500	365	750	125	14	72.5	887	100	65	40	110
	3	505	280	376	600	416	920	160	14	95	992	100	65	40	140
65-40-315	4	550	300	405	600	445	900	150	14	85	1045	125	65	40	160
	5.5	550	300	405	600	445	950	175	14	110	1101	125	65	40	182
65-50-160	0.55	392	232	296	500	336	700	100	14	47.5	755	80	65	50	65
	0.75	392	232	296	500	336	700	100	14	47.5	755	80	65	50	66
80-50-200	1.1	392	232	296	500	336	700	100	14	47.5	794	80	65	50	82
	1.5	460	260	325	500	365	750	125	14	72.5	849	100	80	50	103
	2.2	460	260	325	500	365	750	125	14	72.5	877	100	80	50	114
80-50-250	3	460	260	325	500	365	750	125	14	72.5	877	100	80	50	119
	4	505	280	376	600	416	920	160	14	95	1042	125	80	50	148
	5.5	505	280	376	600	416	920	160	14	95	1107	125	80	50	169
80-50-315	5.5	605	325	405	600	445	950	175	18	108.5	1101	125	80	50	186
	7.5	605	325	405	600	445	950	175	18	108.5	1141	125	80	50	200
80-65-160	0.75	440	260	325	500	365	700	100	14	47.5	775	100	80	65	87
	1.1	440	260	325	500	365	750	125	14	72.5	824	100	80	65	90
	1.5	440	260	325	500	365	750	125	14	72.5	849	100	80	65	97

● To be continued

4 Pole


Model	Power (kW)	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
100-65-200	3	505	280	376	600	416	920	160	14	95	992	100	100	65	140
	4	505	280	376	600	416	920	160	14	95	1017	100	100	65	146
	5.5	505	280	376	600	416	920	160	14	95	1082	100	100	65	167
100-65-250	5.5	550	300	420	600	460	980	190	14	110	1111	125	100	65	179
	7.5	550	300	420	600	460	980	190	18	110	1151	125	100	65	198
100-65-315	11	605	325	460	800	500	1120	160	18	80	1267	125	100	65	299
	15	605	325	460	800	500	1120	160	18	80	1307	125	100	65	321
100-80-160	1.5	460	260	340	600	380	860	130	14	65	954	100	100	80	123
	2.2	460	260	340	600	380	860	130	14	65	982	100	100	80	119
	3	460	260	340	600	380	860	130	14	65	982	100	100	80	124
125-80-400	15	735	380	500	800	540	1150	175	18	94	1317	125	125	80	385
	18.5	735	380	500	800	540	1150	175	18	94	1374	125	125	80	420
	22	735	380	510	800	560	1220	210	22	126.5	1404	125	125	80	442
	30	735	380	510	800	560	1220	210	22	126.5	1442	125	125	80	491
	37	755	400	510	800	560	1250	225	22	141.5	1481	125	125	80	548
125-100-200	4	580	300	420	600	460	900	150	14	70	1045	125	125	100	167
	5.5	580	300	420	600	460	980	190	18	110	1111	125	125	100	184
	7.5	580	300	420	600	460	980	190	18	110	1151	125	125	100	203
	11	580	300	420	800	460	1100	150	18	70	1237	125	125	100	254
125-100-250	15	605	325	460	800	500	1120	160	18	80	1322	140	125	100	329
125-100-315	11	665	350	460	800	500	1120	160	18	79	1282	140	125	100	312
	18.5	665	350	460	800	500	1180	190	18	109	1379	140	125	100	368
	22	665	350	460	800	500	1180	190	18	109	1409	140	125	100	385
125-100-400	30	735	380	570	800	620	1220	210	22	110	1447	140	125	100	495
	37	755	400	575	900	625	1300	200	22	100	1496	140	125	100	574
	45	755	400	575	900	625	1300	200	22	100	1531	140	125	100	603
150-125-250	11	705	350	460	800	500	1120	160	18	79	1282	140	150	125	308
	15	705	350	460	800	500	1180	190	18	79	1322	140	150	125	335
	18.5	705	350	460	800	500	1180	190	18	109	1379	140	150	125	366
	22	705	350	460	800	500	1180	190	18	109	1409	140	150	125	383

● To be continued

4 Pole

Model	Power (kW)	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
150-125-315	30	735	380	570	800	620	1220	210	22	110	1447	140	150	125	481
	37	755	400	575	900	625	1300	200	22	100	1496	140	150	125	558
150-125-400	45	835	435	575	900	625	1300	200	22	100	1531	140	150	125	612
	55	835	435	575	900	625	1350	225	22	125	1592	140	150	125	670
200-150-315	75	835	435	620	800	670	1400	300	22	200	1665	140	150	125	827
	37	835	435	620	800	670	1400	300	22	200	1656	160	200	150	613
	45	835	435	595	900	645	1500	300	22	200	1691	160	200	150	651
200-150-400	55	835	435	595	900	645	1500	300	22	200	1752	160	200	150	723
	75	835	435	625	1000	675	1600	300	22	200	1835	160	200	150	879
	75	885	435	625	1000	675	1600	300	22	200	1835	160	200	150	932
250-200-315	90	885	435	625	1000	675	1600	300	22	200	1885	160	200	150	1028
	110	885	435	710	1200	760	1700	250	22	150	2124	160	200	150	1398
	37	885	435	620	800	670	1400	300	22	200	1676	180	250	200	664
250-200-400	45	885	435	595	900	645	1500	300	22	200	1711	180	250	200	702
	55	885	435	595	900	645	1500	300	22	200	1772	180	250	200	768
	75	885	435	625	1000	675	1600	300	22	200	1855	180	250	200	913
250-200-400	90	950	500	625	1000	675	1600	300	22	200	1905	180	250	200	1087
	110	950	500	710	1200	760	1700	250	22	150	2144	180	250	200	1473
	132	950	500	710	1200	760	1750	275	22	175	2244	180	250	200	1568
	160	950	500	710	1200	760	1750	275	22	175	2244	180	250	200	1637

● NIS,NISF Pump set dimension

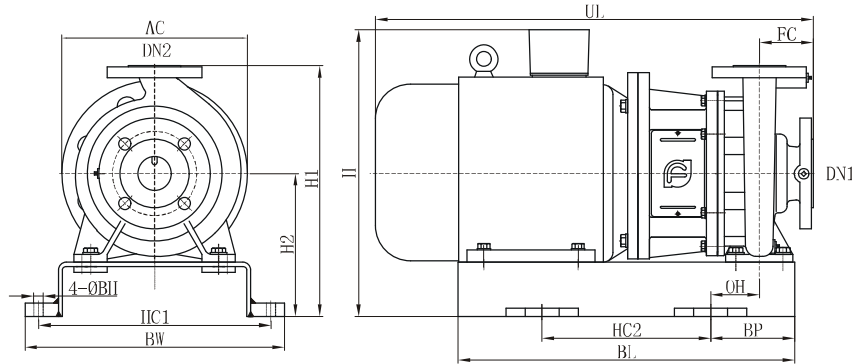

● NIS,NISF Pump set dimension table

2 Pole

Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
50-32-160	3	382	372	212	306	250	336	450	100	14	47.5	563	80	50	32	75
	4	400	372	212	306	250	336	450	100	14	47.5	578	80	50	32	81
	5.5	425	372	212	335	300	365	500	100	14	47.5	650	80	50	32	105
50-32-200	7.5	453	420	240	350	300	380	500	100	14	46	650	80	50	32	120
	11	500	420	240	390	350	420	600	125	18	71	787	80	50	32	175
65-40-200	7.5	453	420	240	335	300	365	500	100	14	47.5	670	100	65	40	120
	11	500	420	240	390	350	420	600	125	18	71	807	100	65	40	177
	15	500	420	240	390	350	420	600	125	18	71	807	100	65	40	187
65-40-250	18.5	520	485	260	390	400	420	660	130	18	63.5	865	100	65	40	222
	22	535	485	260	430	400	460	700	150	18	81.5	895	100	65	40	257
	30	585	505	280	470	450	500	750	150	18	81.5	967	100	65	40	318
65-40-315	22	555	530	280	430	400	460	700	150	18	81.5	920	125	65	40	270
	30	585	530	280	465	500	495	800	150	18	81.5	992	125	65	40	340
	37	585	530	280	465	500	495	800	150	18	81.5	992	125	65	40	359
65-50-160	4	400	372	212	306	250	336	450	100	14	47.5	578	80	65	50	83
	5.5	425	372	212	335	300	365	500	100	14	47.5	650	80	65	50	107
	7.5	425	372	212	335	300	365	500	100	14	47.5	650	80	65	50	110

● To be continued

2 Pole

Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
80-50-200	11	500	440	240	390	350	420	600	125	18	71	807	100	80	50	181
	15	500	440	240	390	350	420	600	125	18	71	807	100	80	50	191
	18.5	500	440	240	390	400	420	660	130	18	76	862	100	80	50	211
	22	535	460	260	430	400	460	700	150	18	96	892	100	80	50	254
80-50-250	30	585	505	280	470	450	500	750	150	18	81.5	992	125	80	50	320
	37	585	505	280	470	450	500	750	150	18	81.5	992	125	80	50	339
80-50-315	37	610	585	305	465	500	495	800	150	18	81.5	992	125	80	50	370
	45	640	585	305	520	500	560	820	160	22	90	1042	125	80	50	434
	55	715	630	350	585	550	625	950	200	22	130	1156	125	80	50	534
80-65-160	75	780	660	380	630	600	670	1000	200	22	130	1231	125	80	50	675
	5.5	453	420	240	335	300	365	500	100	14	47.5	670	100	80	65	115
	7.5	453	420	240	335	300	365	500	100	14	47.5	670	100	80	65	118
80-65-200	11	500	420	240	390	350	420	600	125	18	71	807	100	80	65	175
	15	500	420	240	390	350	420	600	125	18	71	807	100	80	65	185
100-65-200	18.5	520	485	260	390	400	420	660	130	18	63.5	865	100	100	65	222
	22	535	485	260	430	400	460	700	150	18	81.5	895	100	100	65	257
	30	585	505	280	470	450	500	750	150	18	81.5	967	100	100	65	318
100-65-250	37	585	505	280	470	450	500	750	150	18	81.5	967	100	100	65	337
	45	640	555	305	520	500	560	820	160	22	90	1042	125	100	65	426
100-65-315	55	715	600	350	585	550	625	950	200	22	116.5	1156	125	100	65	529
	75	780	630	380	630	600	670	1000	200	22	114	1231	125	100	65	673
	90	780	660	380	630	600	670	1100	250	22	164	1295	125	100	65	730
100-80-160	110	945	695	415	720	600	760	1100	250	22	164	1530	125	100	65	1161
	11	500	440	240	390	400	420	660	130	18	63.5	810	100	100	80	177
	15	500	440	240	390	400	420	660	130	18	63.5	810	100	100	80	187
125-100-200	18.5	500	440	240	390	400	420	660	130	18	63.5	865	100	100	80	207
	22	535	460	260	430	400	460	700	150	18	83.5	895	100	100	80	248
	30	585	560	280	465	500	495	800	150	18	69	992	125	125	100	349
125-100-250	37	585	560	280	465	500	495	800	150	18	69	992	125	125	100	368
	45	640	585	305	520	500	560	820	160	22	90	1042	125	125	100	431
	55	715	630	350	585	550	625	950	200	22	116.5	1156	125	125	100	534
	75	780	660	380	630	600	670	1000	200	22	114	1231	125	125	100	678

● To be continued

2 Pole

Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
125-100-250	75	780	660	380	630	600	670	1000	200	22	114	1265	140	125	100	701
	90	780	660	380	630	600	670	1100	250	22	164	1315	140	125	100	738
	110	945	695	415	720	600	760	1100	250	22	164	1523	140	125	100	1169
125-100-315	90	780	695	380	630	600	670	1100	250	22	164	1310	140	125	100	744
	110	945	730	415	720	600	760	1100	250	22	164	1545	140	125	100	1170
	132	945	730	415	720	700	760	1220	260	22	174	1655	140	125	100	1230
	160	945	730	415	720	700	760	1220	260	22	174	1655	140	125	100	1350

● Pump set dimension table

4 Pole

Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
50-32-160	0.55	352	372	212	306	250	336	400	75	14	22.5	483	80	50	32	44
	0.75	352	372	212	306	250	336	400	75	14	22.5	483	80	50	32	45
50-32-200	1.1	400	420	240	306	250	336	400	75	14	22.5	498	80	50	32	71
	1.5	400	420	240	306	250	336	400	75	14	22.5	523	80	50	32	78
65-40-200	1.1	400	420	240	335	250	365	400	75	14	22.5	518	100	65	40	73
	1.5	400	420	240	335	250	365	400	75	14	22.5	543	100	65	40	80
	2.2	410	420	240	335	250	365	450	100	14	47.5	583	100	65	40	91
65-40-250	3	430	485	260	386	300	416	500	100	14	35	591	100	65	40	109
65-40-315	4	468	530	280	415	300	445	500	100	14	35	631	125	65	40	128
	5.5	493	530	280	415	300	445	500	100	14	35	687	125	65	40	151
	0.55	352	372	212	306	250	336	400	75	14	22.5	483	80	65	50	46
65-50-160	0.75	352	372	212	306	250	336	400	75	14	22.5	483	80	65	50	47
	1.1	372	372	212	306	250	336	400	75	14	22.5	498	80	65	50	63
	1.5	400	440	240	335	250	365	400	75	14	22.5	543	100	80	50	84
80-50-200	2.2	410	440	240	335	250	365	450	100	14	47.5	583	100	80	50	95
	3	410	440	240	335	250	365	450	100	14	47.5	583	100	80	50	100
	4	448	485	260	386	300	416	500	100	14	35	631	125	80	50	116
80-50-250	5.5	473	485	260	386	300	416	500	100	14	35	687	125	80	50	137
	5.5	518	585	305	415	350	445	550	100	18	33.5	687	125	80	50	155
80-50-315	7.5	518	585	305	415	350	445	550	100	18	33.5	727	125	80	50	169
	0.75	380	420	240	335	250	365	400	75	14	22.5	503	100	80	65	67
80-65-160	1.1	400	420	240	335	250	365	400	75	14	22.5	518	100	80	65	71
	1.5	400	420	240	335	250	365	400	75	14	22.5	543	100	80	65	78

● To be continued

4 Pole

Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
100-65-200	3	430	485	260	386	300	416	500	100	14	35	591	100	100	65	109
	4	448	485	260	386	300	416	500	100	14	35	606	100	100	65	114
	5.5	473	485	260	386	300	416	500	100	14	35	662	100	100	65	135
100-65-250	5.5	493	530	280	430	350	460	550	100	14	20	687	125	100	65	147
	7.5	493	530	280	430	350	460	550	100	18	20	727	125	100	65	166
100-65-315	11	565	585	305	470	400	500	700	150	18	70	854	125	100	65	249
	15	565	585	305	470	400	500	700	150	18	70	909	125	100	65	270
100-80-160	1.5	400	440	240	350	200	380	410	105	14	40	536	100	100	80	91
	2.2	410	440	240	350	300	380	500	100	14	35	591	100	100	80	87
	3	410	440	240	350	300	380	500	100	14	35	591	100	100	80	92
125-80-400	15	620	715	360	510	450	540	750	150	18	68	911	125	125	80	334
	18.5	635	715	360	510	450	540	750	150	18	68	941	125	125	80	369
	22	635	715	360	520	450	560	750	150	22	66.5	981	125	125	80	391
	30	665	715	360	520	500	560	820	160	22	76.5	1015	125	125	80	440
125-100-200	37	695	715	360	520	500	560	820	160	22	76.5	1058	125	125	80	498
	4	468	560	280	430	300	460	500	100	14	20	631	125	125	100	136
	5.5	493	560	280	430	350	460	550	100	18	20	687	125	125	100	152
125-100-250	7.5	493	560	280	430	350	460	550	100	18	20	727	125	125	100	171
	11	540	560	280	430	400	460	650	125	18	45	835	125	125	100	222
125-100-315	15	565	585	305	470	400	500	700	150	18	70	924	140	125	100	278
	11	590	645	330	470	400	500	700	150	18	69	869	140	125	100	261
	18.5	605	645	330	470	450	500	750	150	18	69	954	140	125	100	317
125-100-400	22	605	645	330	470	450	500	750	150	18	69	994	140	125	100	335
	30	635	645	330	520	500	560	820	160	22	76.5	1028	140	125	100	394
	30	665	715	360	580	500	620	800	150	22	50	1028	140	125	100	444
150-125-250	37	715	735	380	585	550	625	950	200	22	100	1071	140	125	100	523
	45	715	735	380	585	550	625	950	200	22	100	1101	140	125	100	552
150-125-315	11	590	685	330	470	400	500	700	150	18	69	869	140	150	125	257
	15	590	685	330	470	400	500	700	150	18	69	924	140	150	125	284
	18.5	605	685	330	470	450	500	750	150	18	69	954	140	150	125	315
	22	605	685	330	470	450	500	750	150	18	69	994	140	150	125	333


Technical Data

● To be continued

4 Pole

Model	Power (kW)	H	H1	H2	HC1	HC2	BW	BL	BP	BH	OH	UL	FC	DN1	DN2	Total weight (kg)
150-125-315	30	665	715	360	580	500	620	800	150	22	50	1028	140	150	125	430
	37	715	735	380	585	550	625	950	200	22	100	1071	140	150	125	507
150-125-400	45	750	815	415	585	550	625	950	200	22	100	1103	140	150	125	561
	55	780	815	415	585	550	625	950	200	22	100	1187	140	150	125	620
200-150-315	75	815	815	415	630	600	670	1000	200	22	100	1262	140	150	125	776
	37	750	815	415	605	500	670	900	200	22	100	1116	160	200	150	541
	45	750	815	415	605	500	645	900	200	22	100	1146	160	200	150	579
200-150-400	55	780	815	415	605	600	645	1000	200	22	100	1254	160	200	150	650
	75	815	815	415	630	600	675	1100	250	22	150	1329	160	200	150	806
250-200-315	75	815	865	415	630	600	675	1100	250	22	150	1329	160	200	150	859
	90	815	865	415	630	600	675	1100	250	22	150	1379	160	200	150	956
	110	945	865	415	720	700	760	1220	260	22	160	1614	160	200	150	1325
250-200-400	37	750	865	415	605	500	670	900	200	22	100	1136	180	250	200	592
	45	750	865	415	605	500	645	900	200	22	100	1166	180	250	200	630
	55	780	865	415	605	600	645	1100	250	22	150	1274	180	250	200	695
250-200-400	75	815	865	415	630	600	675	1100	250	22	150	1349	180	250	200	840
	90	845	930	480	630	600	675	1100	250	22	150	1399	180	250	200	1015
	110	1010	930	480	720	750	760	1250	250	22	150	1634	180	250	200	1400
	132	1010	930	480	720	700	760	1220	260	22	160	1744	180	250	200	1495
	160	1010	930	480	720	700	760	1220	260	22	160	1744	180	250	200	1564

NIS,NISF flange

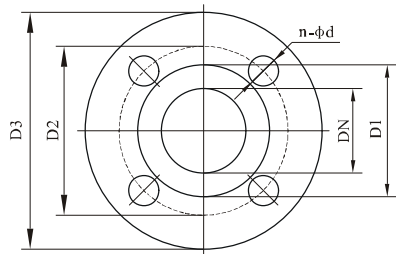

NIS,NISF flange dimensions						
DN	D1	D2	D3	n	d	
32	78	100	140	4	18	
50	102	125	165	4	18	
65	122	145	185	4	18	
80	133	160	200	8	18	
100	158	180	220	8	18	
125	184	210	250	8	18	
150	212	240	285	8	22	
200	268	295	340	12	22	
250	320	355	405	12	26	

China Head Quarter

Tel: +86-571-86051667
Email: info@nanfang-pump.com

Asia

Tel: +86-571-86390516
Email: kathy@nanfang-pump.com
Tel2: +86-571-86390517
Email: jason@nanfang-pump.com
FAX: +86-571-86051696
Add:
Office: #156~#168, Iluzhou street, Gongshu District, Ilanzhou City ZheJiang Province, China
Factory: Nanfang pump industry Co.,Ltd, Renhe Town Yuhang District, Ilanzhou City, Zhejiang Province, China

Europe

Tel: +34-972-394654
Add: Pl Casa Nova C. Tarragona, 74, 17181 Aiguaviva -, Girona, Catalonia - Spain
Email: info@hydroo.com

Middle East

Tel: +971-42-552221
Add: Office 614, Business Village B, Deira, Dubai, UAE
Email: tong@nanfang-pump.com

Russia

Tel: +7 495 995 37 21
Add: 143441 Красногорский район п/о Путилково, 72 км МКАД. «Гринвуд бизнес-парк» корпус №9, пятый этаж, Москва, Россия.
Email: morpheus@nanfang-pump.com

America

Tel: +86-21-62608613
Email: brenda_wcn@nanfang-pump.com

Web: www.cnppump.com
www.cnp-changsha.com
Email: info@nanfang-pump.com