

See-Through Strainer Cover
lets you see when basket needs cleaning and eliminates guesswork. 155 cubic-inch basket has rigid construction including load-extender ribbing for free-flowing operation.

Full Flow Hydraulics
allow greater flow at a lower cost of operation.

Service-Easy Design allows simple access to all internal parts. Motor and entire drive group assembly can be removed, without disturbing pipe or mounting connections, by disengaging just six bolts.

Heavy-Duty, High-Performance Motor with airflow ventilation for quieter, cooler operation.

Uni-Bracket Mounting Base provides stable, stress-free support, plus versatility for any installation requirement. Adapts 48- and 56-frame motors.

Self-Priming
Section lift up to 10' above water level.

Heat-Resistant, Industrial-Size Ceramic Seal is long-wearing and drip proof.




OVERALL DIMENSIONS	MODEL	Total HP*	Full Flow HP*	Service Factor	Voltage	Pipe Size	ISM "H"
	SPS0015CA	1.13	¾	1.50	115/230	2"	15N"
	SPS010EAZ	1.50	1	1.50	115/230	2"	15N"
	SPS015EAZ	2.00	1½	1.33	115/230	2"	16½"
	SPS020EAZ	2.50	2	1.25	230	2"	16½"
	SPS030EAZ	3.46	3	1.15	230	2"	17½"
	SPS040EAZ	3.46	3	1.15	230/480	2"	14N"

* Based on 115V



Super II 155-Cubic-Inch Basket

is more like a bucket. The Super II Pump Series features impressive leaf-holding capacity. Rigid construction includes load-extender ribbing for free-flowing operation, even under extra-heavy debris loads.

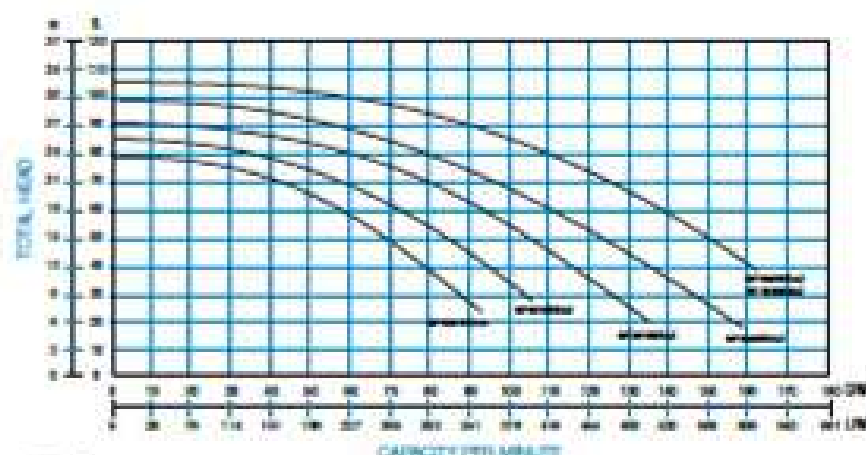

Super II Series Pumps are listed by:



To take a closer look at Super II Pumps or other Hayward products, go to www.haywardpool.com or call 1-888-HAYWARD



ECO Division Street 1, Orem, UT 84057

HAYWARD POOL PRODUCTS ARE REGISTERED TRADEMARKS OF HAYWARD INDUSTRIES, INC. © 2011 HAYWARD INDUSTRIES, INC.

11/11/2011