




ZHENZHONG

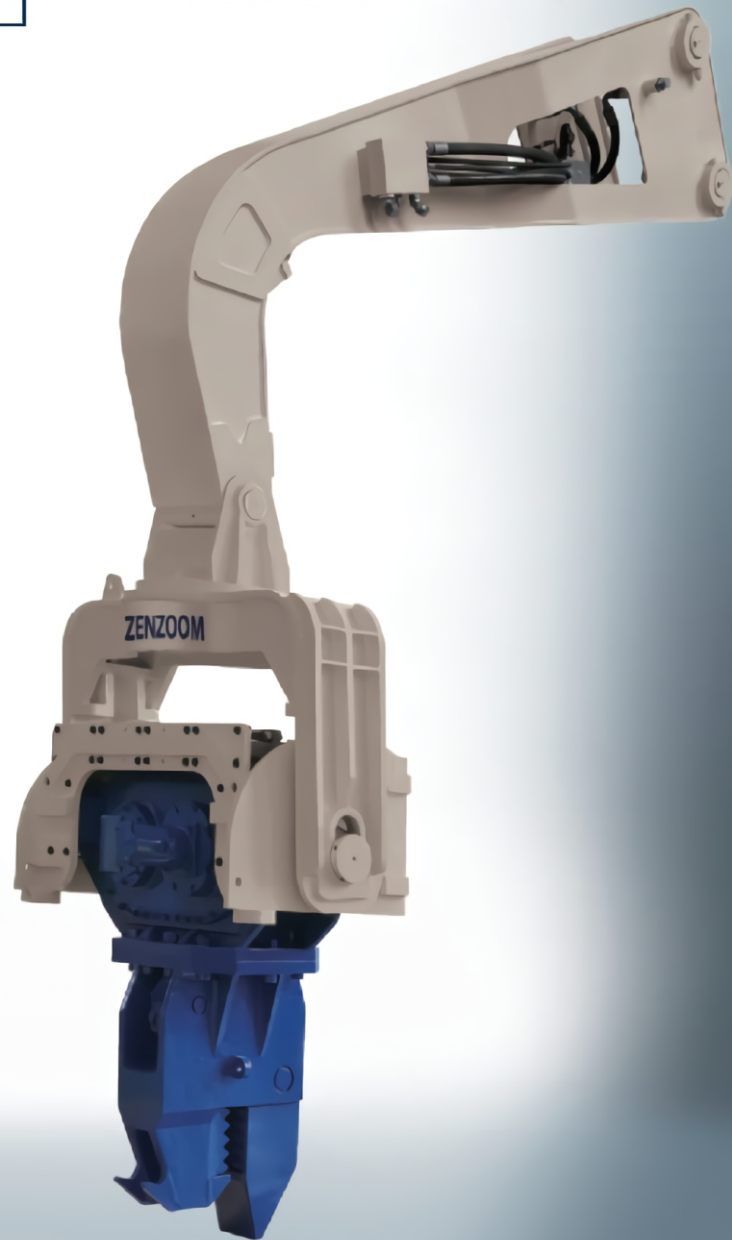

VIBRO HAMMER

振动锤



MITRA TEKNINDO SEJATI

Jakarta

Galeri Niaga Mediterania 1
Jl. Pantai Indah Utara II Blok. X3 No. G8A-8B
Pantai Indah Kapuk - Jakarta Utara
Telp. 021 52393819

Bantaeng

Jl. Dusun Mawang, Desa Papanloe,
Pajukukang, Bantaeng Regency
Sulawesi Selatan

Tangerang I

Kawasan Industri Milenium Blok P2 No. 3
Jl. Pemda Tigaraksa, Sukamulya,
Cikupa, Tangerang - Banten
Telp. 021 59645008

Tangerang II

Kawasan Bizlink Citra Raya Blok O 08/20
Jl. Pemda Tigaraksa, Sukamulya
Cikupa, Tangerang - Banten

Surabaya

Jl. Gunung Sari No. 55-59 (Gudang B),
Surabaya - Jawa Timur
Telp. 031 99545799

Makassar


Jl. Ir. Sutami, Pertamina (Pengisian Gas Elpiji)
PT. Pergudangan Permata Alam Blok B No. 10
Makassar - Sulawesi Selatan
Telp 04118037636

Samarinda

Jl. Ampera Pergudangan Mangkupalas Bisnis
Center Blok D20 Simpang Pasir
Palaran, Samarinda - Kalimantan Timur

DZ SERIES VIBRO HAMMER

DZ系列振动锤

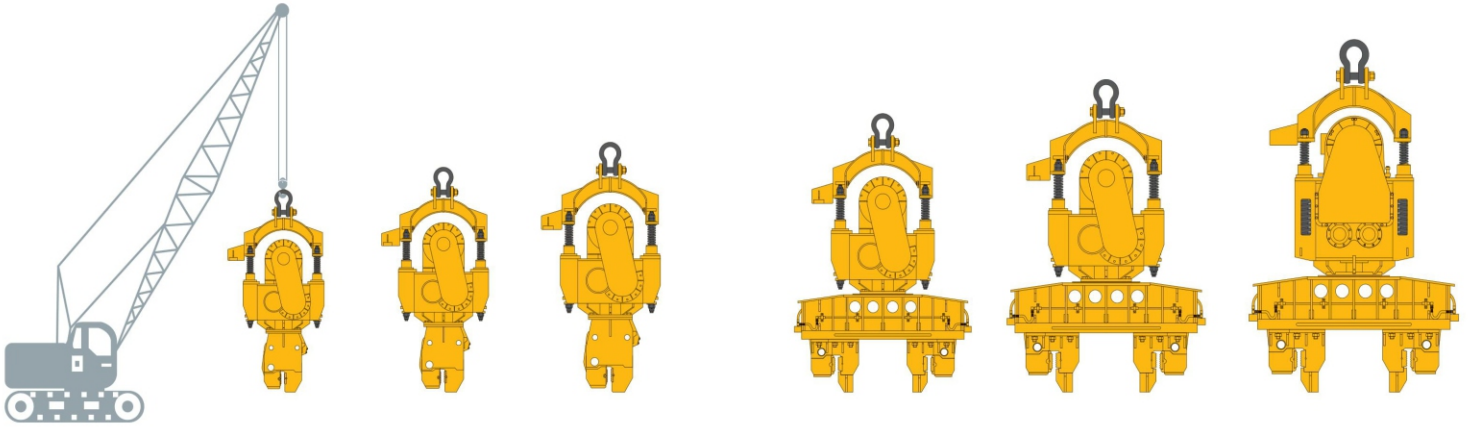

型号	Model	DZ30A	DZ45A	DZ60A	DZ90A	DZ120A	DZ135A	DZ150A	DZ200A
电动功率	Motor Power	30kW	45kW	60kW	90kW	120kW	135kW	150kW	200kW
振动频率	Frequency	1050r/min	1100r/min	1100r/min	1050r/min	1000r/min	666r/min	940r/min	780r/min
偏心力矩	Eccentric moment	192Nm	245Nm	360Nm	460Nm	700Nm	1220Nm	1000Nm	2400Nm
激振力	Centrifugal force	237kN	363kN	450kN	570kN	786kN	604kN	1000kN	1600kN
空载振幅	Amplitude	9.3mm	8.9mm	9.6/10mm	10.3mm	12.2mm	18.6mm	12.5mm	20mm
许用拔桩力	Max. Extraction Force	100kN	200kN	200kN	240kN	400kN	400kN	400kN	600kN
设备高度	Overall Dimensions H	1.88m	2.12m	2.24m	2.56m	2.84m	3.1m	3.3m	4m
设备长度	Overall Dimensions L	1.37m	1.29m	1.21m	1.53m	1.72m	1.72m	1.71m	1.65m
设备宽度	Overall Dimensions W	1.08m	1.23m	1.37m	1.1m	1.4m	1.4m	1.5m	1.9m
总重量	Total weight	2800kg	3150kg	4320kg	5580kg	7120kg	9100kg	9535kg	14500kg
电缆线规格	Wire cable	25mm ²	35mm ²	35mm ²	50mm ²	70mm ²	75mm ²	95mm ²	110mm ²
所配夹具	Clamp	Single	Single	Single	Single / Double	Single / Double	Single / Double	Single / Double	Single/double
桩径	Diameter of the pile	/	/	/	φ500-φ1200mm	φ600-φ2000mm	φ600-φ2000mm	φ600-φ2500mm	φ700-φ3000mm
发电机功率	Generator capacity	≥120kW	≥150kW	≥200kW	≥300kW	≥350kW	≥400kW	≥450kW	≥600kW
履带吊规格	Min crane capacity	≥20t	≥25t	≥35t	≥50t	≥70t	≥70t	≥80t	≥80t

Promotional materials are for reference only. All configuration with the contract or the material as technology constantly updated, technical parameters are subject to change without prior notice.

