

Oil Filter Crushers

Distributor in Indonesia:



PT. Kenco Primadea

Ruko Multiguna Blok C 9, Jl. Bintaro Utama Sektor 3 A, Bintaro Jaya Tangerang Selatan 15412 T +62 21 2932 7623 /24 F +62 21 7369 1067 www.kenco.co.id asidiq@kencoprimadea.com



C-4 Pneumatic Oil Filter Crusher for automobile filters.

- Reduces filters by 75% of original size, and removes 95% of the free-flowing oil so it can be recycled.
- Crushing chamber accepts filters 7 1/2" tall x 5" diameter.
- · Only one moving part, a 1 1/2" shaft.
- · Safety door crusher will not operate if door is opened.
- Cycle time: 5 seconds.
- Air requirement: 125 to 175 PSI.
- · Air regulator not needed.
- · Oiler and lubricator not needed.

- · All parts in contact with air are rust proof.
- · Optional stand (sold separately).
- · Overall size: 26" high, 11" wide, 11" deep.
- · Lifetime warranty on housing, one year limited

- (Shipping weight 116 lbs. Shipped UPS.)

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
7605	C-4 Pneumatic Automobile Oil Filter Crusher	118 (53.5)
7590	Small Crusher Stand for C-4 and C-6 Oil Filter Crushers	101 (45.8)
8203	C-4 Pneumatic Automobile Oil Fil Crusher with #7590 Crusher Stand	•••





C-4 Crusher

C-4 Pneumatic Oil Filter Crusher for automobile filters.

Dimensions and System Options

vebair	Parts
MODEL NO.	DESCRIPTION
7589	C4, C6 90 degree Elbow
7599	C4, C6 TT12 Ball Valve
7602	C4 8" Black Cylinder
7611	C4 Cup Plate
7614	C4 Push Plate
7612	C4 Door
7617	C4 Return Spring
7618	C4 Shaft
7619	C4 Top Bearing
7642	C4, C6 TT12 MJV-3 Air Clippard Valve
7708	C4, C6 3/8" Push-on Connector
7719	C4, C6, TT12 Muffler
7749	C4, C6, TT12 S1205 Safety Valve
7847	C4, C6 Handle
7853	C4 Air Tube / Galvanized Pipe
7859	C4 Neoprene Cup
7860	C4 8" Large O-Ring
7901	C4, C6 Reducer Bushing
7902	C4, C6, TT12 1-1/4" 12 Jam Nut
7903	C, C6, TT12 1-1/8" Washer
7904	C4, C6, TT12, TT25 3/8" Ball Bearing Switch
7905	C4, C6, TT12, TT25 Safety Switch Spring
7906	C4, C6, TT12, TT25 1/4" x 2-1/4" Clevis Pin
7907	C4, C6, TT12, TT25 3/8" ID x 1/2" OD Bearing
7908	C4, C6, TT12, TT25 1/4" x 1-1/2" Clevis Pin
7909	C4, C6, TT12, TT25 3/32" x 1/2" Cotter Pin
7914	C4 Drain Hose Adaptor
7917	C4, C6, TT12. TT25 3/8" x 2-1/4" Grade 8 Tap Bolt
7918	C4, C6. TT12, TT25 3/8" x 16 Stover Nut
7938	C4, C6, TT12, TT25 5/16" Flat Washer
7940	C4, C6, TT12 1/4" Air Hose Assembly







Crusher



C-6 Pneumatic Oil Filter Crusher for light truck diesel and SUV filters.

- Reduces filters by 75% of original size, and removes 95% of the free-flowing oil so it can be recycled.
- Large crushing chamber: accepts filters up to 10" tall x 7" diameter.
- · Only one moving part, a 2" shaft.
- · Safety door crusher will not operate if door is opened.
- Cycle time: 7 seconds.
- · Air requirement: 125 to 175 PSI.

- Oiler and lubricator not needed.
- · All parts in contact with air are rust proof.
- Optional stand (sold separately).
- Overall size on stand: 75" high, 36" wide, 26" deep.
- on all other parts.
- · Air regulator not needed.

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
8207	C-6 Pneumatic SUV Oil Filter Crus	sher 221 (100.2)
7590	Smaller Crusher Stand for C-4 and C-6 Oil Filter Crushers	1 101 (45.9)
7610	C-6 Pneumatic SUV Oil Filter Crus with #7590 Crusher Stand	sher 281 (127.5)





C-6 Crusher

C-6 Pneumatic Oil Filter Crusher for light truck diesel and SUV filters.

Dimensions and System Options

repair	raits
MODEL NO.	DESCRIPTION
7589	C-4, C6 90 degree Elbow
7599	C-4, C6 TT12 Ball Valve
7628	C-6 Cup Plate
7632	C-6 Push Plate
7629	C-6 Door
7858	C-6 Return Spring
7633	C-6 Shaft
7634	C-6 Top Bearing
7642	C-4, C-6 TT-12 MJV-3 Air Clippard Valve
7708	C-4, C-6 3/8" Push-on Connector
7719	C-4, C-6, TT-12 Muffler
7749	C-4, C-6, TT-12 S1205 Safety Valve
7847	C-4, C-6 Handle
7861	C-6 Neoprene Cup
7862	C-6 10" Large O-Ring
7901	C-4, C-6 Reducer Bushing
7902	C-4, C-6, TT-12 1-1/4" 12 Jam Nut
7903	C, C-6, TT-12 1-1/8" Washer
7904	C-4, C-6, TT-12, TT-25 3/8" Ball Bearing Switch
7905	C-4, C-6, TT-12, TT-25 Safety Switch Spring
7906	C-4, C-6, TT-12, TT-25 1/4" x 2-1/4" Clevis Pin
7907	C-4, C-6, TT-12, TT-25 3/8" ID x 1/2" OD Bearing
7908	C-4, C-6, TT-12, TT-25 1/4" x 1-1/2" Clevis Pin
7909	C-4, C-6, TT-12, TT-25 3/32" x 1/2" Cotter Pin
7917	C-4, C-6, TT-12. TT-25 3/8" x 2-1/4" Grade 8 Tap Bolt
7918	C-4, C-6. TT-12, TT-25 3/8" x 16 Stover Nut
7938	C-4, C-6, TT-12, TT-25 5/16" Flat Washer
7940	C-4, C-6, TT-12 1/4" Air Hose Assembly







TT-12 Crusher



Pneumatic Oil Filter Crusher for tractor trailer and truck filters.

- Reduces filters by 75% of original size, and removes 95% of the free-flowing oil so it can be recycled.
- Only one moving part, a 2" shaft.
- Safety door crusher will not operate if door is opened.
- · Cycle time: 23 seconds.
- Air requirement 125 to 175 PSI,
- · Air regulator not needed.
- Oiler and lubricator not needed.

- All parts in contact with air are rust proof.
- Size: 51" high, 18" wide, 17" deep.
- Lifetime warranty on housing, one year limited on all other parts.
- · Optional Stand.
- Crusher weight 350 lbs. (Shipping weight 425 lbs. Trucked on pallet.)

MODEL NO.	DESCRIPTION	SHIPPING WEIGH	HT LBS (KG)
7715	TT12 Pneumatic Truck Oil Filter (rusher	418 (189.6)
7550	Large Crusher Stand with Resevoir for C-6, TT12 and TT25 Oil Filter Crushers 153 (69.4		153 (69.4)
8210	TT12 Pneumatic Truck Oil Filter (with #7550 Crusher Stand with Re		530 (240.4)





TT-12 Crusher

Pneumatic Oil Filter Crusher for tractor trailer and truck filters.

Dimensions and System Options

Repair Parts		
Model No.	Description	
7599	OA O/ TT40 P-II Volum	
	C4, C6 TT12 Ball Valve	
7644	TT12 Cylinder	
7604	TT12 Bottom Plate	
7863	TT12, TT25 Push Plate	
7799	TT12 Door	
7796	TT12 Return Spring	
7800	TT12 Shaft	
7642	C4, C6 TT12 MJV-3 Air Clippard Valve	
7719	C4, C6, TT12 Muffler	
7749	C4, C6, TT12 S1205 Safety Valve	
7793	TT12 Handle	
7856	TT12 1/2" OD x .062 Tubing	
7795	TT12 12" Piston Cup	
7794	TT12 12" Large O-Ring	
7902	C4, C6, TT12 1-1/4" 12 Jam Nut	
7903	C, C6, TT12 1-1/8" Washer	
7904	C4, C6, TT12, TT25 3/8" Ball Bearing Switch	
7905	C4, C6, TT12, TT25 Safety Switch Spring	
7906	C4, C6, TT12, TT25 1/4" x 2-1/4" Clevis Pin	
7907	C4, C6, TT12, TT25 3/8" ID x 1/2" OD Bearing	
7908	C4, C6, TT12, TT25 1/4" x 1-1/2" Clevis Pin	
7909	C4, C6, TT12, TT25 3/32" x 1/2" Cotter Pin	
7917	C4, C6, TT12. TT25 3/8" x 2-1/4" Grade 8 Tap Bolt	
7918	C4, C6. TT12, TT25 3/8" x 16 Stover Nut	
7938	C4, C6, TT12, TT25 5/16" Flat Washer	
7940	C4, C6, TT12 1/4" Air Hose Assembly	







TT-25 CRUSHER



Electric Hydraulic Oil Filter Crusher for tractor trailer and truck filters.

- Reduces filters by 75% of original size, and removes 95% of the free-flowing oil so it can be recycled.
- Large crushing chamber: accepts filters up to 16" tall x 9" diameter.
- Automatic crushing cycle.
- Cycle time: 1 minute.
- Pump: 1 Phase/ 230Volt.
- Safety door crusher will not operate if door is opened.
- Overall size on optional stand: 87" high, 23" wide, 31" deep.

- Lifetime warranty on housing, one year limited on all other parts.
- Size: 50" high, 18" wide, 31" deep.
- Lifetime warranty on housing, one year limited on all other parts.
- Optional Stand.
- Crusher weight 382 lbs. With stand 485 lbs. (Shipping weight 497 lbs. Trucked on pallet.)

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (K	(G)
7715	TT12 Pneumatic Truck Oil Filter C	rusher 418 (189	.6)
7550	Large Crusher Stand with Resevoir TT12 and TT25 Oil Filter Crushers		.4)
8210	TT12 Pneumatic Truck Oil Filter Co with #7550 Crusher Stand with Res		.4)






TT-25 CRUSHER

Electric Hydraulic Oil Filter Crusher for tractor trailer and truck filters.

Dimensions and System Options

MODEL NO.	DESCRIPTION
7714	TT25 9/16" MJIC x 9/16" Elbow Adaptor
7863	TT12, TT25 Push Plate
7929	TT25 Ram
7734	TT25 Pump
7899	TT25 Handle Spring
7904	C4, C6, TT12, TT25 3/8" Ball Bearing Switch
7905	C4, C6, TT12, TT25 Safety Switch Spring
7906	C4, C6, TT12, TT25 1/4" x 2-1/4" Clevis Pin
7907	C4, C6, TT12, TT25 3/8" ID x 1/2" OD Bearing
7908	C4, C6, TT12, TT25 1/4" x 1-1/2" Clevis Pin
7909	C4, C6, TT12, TT25 3/32" x 1/2" Cotter Pin
7917	C4, C6, TT12. TT25 3/8" x 2-1/4" Grade 8 Tap Bolt
7918	C4, C6. TT12, TT25 3/8" x 16 Stover Nut
7938	C4, C6, TT12, TT25 5/16" Flat Washer

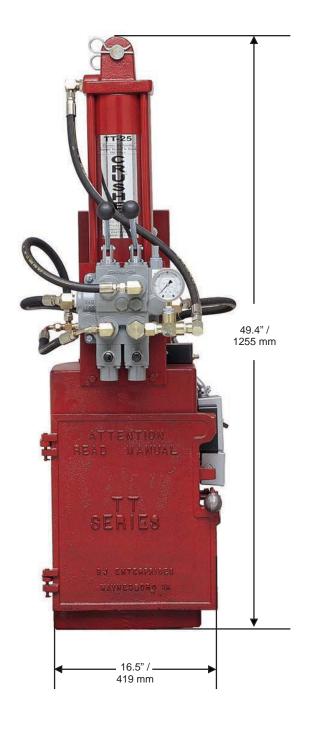





Filter Crusher Stands



For all truck and automotive filter crushers.

Model 7550

- · Industrial grade steel.
- Drain shelf for storing filters.
- 2" NPT drain for piping to other storage vessels.
- Accomodates a 30-gallon drum
- Can be used with any filter crusher manufactured by BJ Enterprises.
- Vibration pads and provisions for securing to the floor.

Model 7590

- Designed for use with C-4 and C-6 oil filter crushers.
- · Industrial grade steel.
- Vibration pads and provisions for securing to the floor.

New Stands

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
7550	Large Crusher Stand with Resevoi C-6, TT12 and TT25 Oil Filter Cru	
7590	Small Crusher Stand for C-4 and C-6 Oil Filter Crushers	101 (45.9)







Filter Crusher Stands

For all truck and automotive filter crushers.

Dimensions and System Options

Automotive Crushers

MODEL NO.	DESCRIPTION
7605	C-4 Pneumatic Automobile Oil Filter Crusher
8203	C-4 Pneumatic Automobile Oil Filter Crusher with #7590 Crusher Stand
8207	C-6 Pneumatic SUV Oil Filter Crusher
7610	C-6 Pneumatic SUV Oil Filter Crusher with #7590 Crusher Stand

Truck Crushers

MODEL NO.	DESCRIPTION
7715	TT12 Pneumatic Truck Oil Filter Crusher
8210	TT12 Pneumatic Truck Oil Filter Crusher with #7550 Crusher Stand with Resevoir
8215	TT25 Electronic Over Hydraulic Oil Filter Crusher
7720	TT25 Electronic Over Hydraulic Oil Filter Crusher with #7550 Crusher Stand with Resevoir







