



NSC 螺帽破壞器

- 特殊設計工具鋼刀可精確劈開螺母至某一部份而不至損壞螺牙。
- 適用性廣泛，包括卡車維修、管路工程、槽罐清理、石化工業、鋼鐵建築、採礦..等。
- 可重新研磨重型刀頭。
- 單動，彈簧回縮油壓缸。
- 頭部特殊角度，適用各作業。
- 整體的設計，使用方便。


Hydraulic Nut Splitter

- ※ Specially designed "tool steel" cutter blade penetrates the nut to the precise point where it cracks, stopping short of the bolt threads.
- ※ Applications include servicing trucks, piping industry, tank cleaning, petrochemical, steel construction and mining.
- ※ Heavy-duty chisels can be reground.
- ※ Single-acting, spring return cylinder.
- ※ Unique angled head allows flush access.
- ※ Compact and ergonomic design, easy to use.

螺帽破壞器組-建議選配
Nut Splitters Sets-Opt



NSC Series




Capacity:
5-90 ton

Bolt Range:
M6-M48

Hex.Nut Range:
10-75 mm

Maximum Operating Pressure:
700 bar

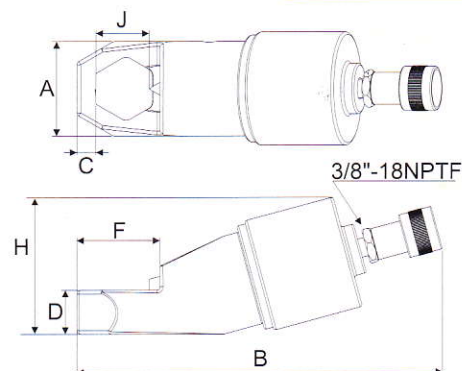



Model No. 型號	Hex. Nut Range 六角螺帽		Bolt Range 螺栓		Capacity 能力 (ton)	Oil Capacity 總油量 (cm ³)	Dimensions(mm) 尺寸								Weight 重量 (kg)
	(in)	(mm)	(in)	(mm)			A	B	C	D	F	H	J		
NSC-1319	0.50-0.75	10-19	0.31-0.50	M6-M12	5	15	40	200	6	19	28	48	21	0.8	
NSC-1924	0.75-0.94	19-24	0.50-0.63	M12-M16	10	20	55	227	8	25	38	71	25	2.0	
NSC-2432	0.94-1.13	24-32	0.63-0.88	M16-M22	15	60	66	260	10	31	49	76	33	3.0	
NSC-3241	1.13-1.56	32-41	0.88-1.13	M22-M27	20	80	75	286	15	35	56	89	43	4.4	
NSC-4150	1.56-2.00	41-50	1.13-1.38	M27-M33	35	155	96	325	21	45	73	109	54	8.2	
NSC-5060	2.00-2.25	50-60	1.38-1.50	M33-M39	50	240	106	366	27	54	92	126	60	11.8	
NSC-6075	2.38-2.88	60-75	1.50-1.88	M39-M48	90	492	156	366	27	75	110	180	78	34.1	

WSR 楔型撐開器

- 單動彈簧回縮。
- 適用於工作空間非常狹小環境。

Hydraulic Wedgie and Spread Cylinder

- ※ Single-acting, spring return.
- ※ For use in very confined work areas.

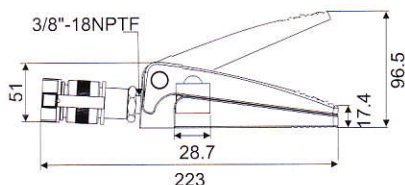

WSR-1 Series

Capacity:
1ton

Tip Clearance:
17.4mm

Maximum Spread:
96.5mm

Maximum Operating Pressure:
700 bar

Cylinder Capacity 油壓缸荷重 (ton)kn	Model Number 型號	Tip clearance 尖端空隙 (mm)	Maximum Spread 最大撐開 (mm)	Cylinder Eff. Area 油缸受壓面積 (cm ²)	Oil Capacity 總油量 (cm ³)	Weight 重量 (kg)
1(8.9)	WSR-1	17.4	96.5	6.5	10	2.3