

08


PLIERS, CUTTERS AND SHEARS



PRECISION PLIERS	Page 318
PROFI CLASSIC PLIERS	Page 324
DIFFERENT PLIERS	Page 327
WATERPUMP PLIERS AND PIPE WRENCHES	Page 329
HEAVY DUTY JAW CUTTERS	Page 334
REVOLVERING PUNCH PLIERS AND EYES	Page 336
TINMANS SHEARS	Page 337
SHEARS	Page 341
GRIP PLIERS	Page 342
CIRCLIP PLIERS	Page 352

490-BI...
HEAVY DUTY SIDE CUTTER

- high cutting performance with minimal effort
- maximum stability under load by additional inductive hardening
- cutting edge hardness: 63-65 HRC
- for hardened steel wire, piano wire (tensile strength 2300 N/mm²)
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C60 / 1.0601
- according to DIN ISO 5749



Code	Number	Ø mm	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0490001452000	490BI-145	2,0	1,6	145	5,75	1	200
0490001652000	490BI-165	2,5	2,0	165	6,5	1	260
0490002002000	490BI-200	3,0	2,5	200	8	1	320

492-BI...
SIDE CUTTER


- oval head
- maximum stability under load by inductive hardening
- cutting edge hardness: 63-65 HRC
- for medium hard wire, steel wire (tensile strength 1600N/mm²)
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C60 / 1.0601
- according to DIN ISO 5749



Code	Number	Ø mm	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0492001302000	492BI-130	2,3	1,5	130	5,25	1	150
0492001452000	492BI-145	2,5	1,8	145	5,75	1	180

468-BI
WIRE STRIPPER/CUTTER

- side cutter with dual function (cutting and stripping of insulation)
- stripping holes for single and multi-wire conductors with 1,5 mm² and 2,5 mm² diameter
- oval head
- maximum stability under load by inductive hardening
- cutting edge hardness: 63-65 HRC
- for medium hard wire, steel wire (tensile strength 1600N/mm²)
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C60 / 1.0601
- similar DIN ISO 5749



Code	Number	Ø mm	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0468000002000	468-BI	2,8	2,0	160	6,25	1	190

494 BI

WIRE STRIPPER WITH RESTRICTED OPENING

- self opening by spring
- V-shaped jaws for stripping of plastic insulation from single and multi-wire conductors
- adjustment of opening position to required diameter by adjustable screw with locknut
- for wires from Ø 0,8 to 6,0 mm
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C45 / 1.0503



Code	Number	l/mm ┌──┐	l/Inch ┌──┐	Pieces ☞	Weight/g ⚖
049400002000	494BI	160	6,25	1	150

494S-0,5 BI

WIRE STRIPPER

- self-adjusting blades in respect of diameter to be stripped
- for stripping of single or multi-wire conductors
- for wires from Ø 0,5 to 5,0 mm
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C45 / 1.0503



Code	Number	l/mm ┌──┐	l/Inch ┌──┐	Pieces ☞	Weight/g ⚖
0494000052000	494S-0,5BI	160	6,5	1	185

485-BI

HEAVY DUTY END CUTTER

- maximum stability under load by inductive hardening
- cutting edge hardness: 63-65 HRC
- for hardened steel wire, piano wire (tensile strength 2300N/mm²)
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C60 / 1.0601
- similar DIN ISO 5748



Code	Number	Ø mm ●	Ø mm ●	l/mm ┌──┐	l/Inch ┌──┐	Pieces ☞	Weight/g ⚖
0485000002000	485BI	2,5	2,2	160	6,5	1	220

495-BI...

COMBINATION PLIER, GERMAN PATTERN

- strong edition for tough conditions
- lay on cutter box for better cutting
- maximum stability under load by inductive hardening
- cutting edge hardness: 63-64 HRC
- for medium hard wire, steel wire (tensile strength 1600N/mm²)
- serrated gripping surface and burner hole
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5746



Code	Number	Ø mm ○	Ø mm ●	l/mm ┌──┐	l/Inch ┌──┐	Pieces ☞	Weight/g ⚖
0495001652000	495BI-165	2,5	1,8	165	6,5	1	200
0495001852000	495BI-185	2,8	2,0	185	7,25	1	260
0495002052000	495BI-205	3,0	2,5	205	8	1	320

470-BI...

SNIBE NOSE PLIER WITH SIDE CUTTER, STRAIGHT PATTERN

- serrated gripping surface, burner hole and side cutter
- maximum stability under load of the blades by inductive hardening
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5745



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0470001452000	470BI-145	145	5,75	1	120
0470001652000	470BI-165	165	6,5	1	150
0470000002000	470BI-200	200	8	1	200

471-45 BI...

SNIBE NOSE PLIER WITH SIDE CUTTER, BENT

- 45° bent, serrated gripping surface, burner hole and side cutter
- maximum stability under load of the blades by inductive hardening
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5745



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0471000002000	471-45 BI 200	200	8	1	200
0471001602000	471-45 BI 165	165	6,5	1	150

471-90 BI...

SNIBE NOSE PLIER WITH SIDE CUTTER, BENT

- 90° bent, serrated gripping surface, burner hole and side cutter
- maximum stability under load of the blades by inductive hardening
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C45 / 1.0503
- similar DIN ISO 5745



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0471091602000	471-90 BI 165	165	6,5	1	150
0471092002000	471-90 BI 200	200	8	1	200

476-BI...

FLAT NOSE PLIER

- for holding and bending
- short jaws, serrated gripping surface
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5745



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0476001452000	476BI-145	145	5,75	1	130
0476001702000	476BI-170	165	6,5	1	175

477-BI-...

ROUND NOSE PLIER

- with long jaws, serrated gripping surface
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5745



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0477001452000	477BI-145*	145	5,75	1	125
0477001702000	477BI-170	160	6,25	1	175

404-S3

MECHANIC'S PLIER SET

- 3 pcs.
- carton box packed
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished



Code	Number	Contents	Pieces	Weight/g
0404500301000	404-S3	470-BI 200 Snap Nose Plier with side cutter, straight pattern 490-BI 165 Heavy Duty Side Cutter 495-BI 185 Engineer's Plier, German pattern	1	690

404-S31

MECHANIC'S PLIER SET

- 3 pcs.
- carton box packed
- chrome-plated, polished



Code	Number	Contents	Pieces	Weight/g
0404500311000	404-S31	132-240 Waterpump Plier 490-BI 165 Heavy Duty Side Cutter 495-BI 185 Engineer's Plier, German pattern	1	790

You will find VDE- and electronic pliers on page no. 305



404-S4

ELECTRICIAN'S PLIER SET

- 4 pcs.
- carton box packed
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished



Code	Number	Contents	Pieces	Weight/g
0404500401000	404-S4	470-BI 165 Snipe Nose Plier with side cutter, straight pattern 490-BI 165 Heavy Duty Side Cutter 494 BI Wire Stripper with restricted opening 495-BI 185 Engineer's Plier, German pattern	1	790

504-S8

MECHANIC' SET

- 8 pcs.
- assortment in convenient plastic case



Code	Number	Contents	Pieces	Weight/g
0504500801000	504-S8	470-BI 200 Snipe Nose Plier with side cutter, straight pattern 490-BI 165 Heavy Duty Side Cutter 495-BI 185 Engineer's Plier, German pattern 545-IS 100, IS 125, IS 150 Screwdriver, plain slotted 547-PH1, PH2 Screwdriver, cross slotted	1	1600

949 H

PLIERS HOLDER

- for presentation of pliers on perforated display walls
- empty, without pliers



Code	Number	l/mm	Pieces	Weight/g
0949000206000	949H	200	1	160

You will find special automotive pliers on page no. 425,430



08

You will find the matching OMS-10 module on page no. 52



You will find the matching OMS-5 module on page no. 52





You will find the matching OMS-21 module on page no. 59



392-...
SIDE CUTTER



- oval head
- maximum stability under load by inductive hardening
- cutting edge hardness: 63-65 HRC
- for medium hard wire, steel wire (tensile strength 1600N/mm²)
- ground, with red dip insulated handles
- ELORA-high grade tool steel C60 / 1.0601
- according to DIN ISO 5749

Code	Number	Ø mm	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0392001455100	392-145	2,2	1,4	145	5,75	1	150
0392001605100	392-160	2,4	1,7	160	6,5	1	180

389-...
HEAVY DUTY SIDE CUTTER


- high cutting performance with minimal effort
- maximum stability under load by inductive hardening
- cutting edge hardness: 63-65 HRC
- for hardened steel wire, piano wire (tensile strength 2300 N/mm²)
- ground, with red dip insulated handles
- ELORA-high grade tool steel C60 / 1.0601
- according to DIN ISO 5749

Code	Number	Ø mm	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0389001705100	389-170	2,5	2,0	165	6,5	1	220
0389002005100	389-200	3,0	2,5	200	8	1	260

395-...
COMBINATION PLIER



- strong edition for tough conditions
- maximum stability under load by inductive hardening
- cutting edge hardness: 63-64 HRC
- for medium hard wire, steel wire (tensile strength 1600N/mm²)
- serrated gripping surface and burner hole
- ground, with red dip insulated handles
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5746

Code	Number	Ø mm	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0395001605100	395-160	2,5	1,8	160	6,5	1	190
0395001805100	395-180	2,8	2,0	180	7,5	1	260
0395002005100	395-200	3,0	2,5	200	8	1	330

370-...
SNIPER NOSE PLIER WITH SIDE CUTTER, STRAIGHT

- serrated gripping surface and side cutter
- maximum stability under load of the blades by inductive hardening
- ground, with red dip insulated handles
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5745

Code	Number	l/mm	l/Inch	Pieces	Weight/g
0370001605100	370-160	165	6,5	1	130
0370002005100	370-200	200	8	1	170

371-...

SNIPE NOSE PLIER WITH SIDE CUTTER, BENT

- 45° bent, serrated gripping surface and side cutter
- maximum stability under load of the blades by inductive hardening
- ground, with red dip insulated handles
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5745



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0371001605100	371-160	165	6,5	1	130
0371002005100	371-200	200	8	1	170

376-160

FLAT NOSE PLIER

- for holding and bending
- long, flat jaws, rippled serrated surface
- ground, with red dip insulated handles
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5745



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0376001605100	376-160	160	6,5	1	140

377-160

ROUND NOSE PLIER

- long jaws, serrated gripping surface
- ground, with red dip insulated handles
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 5745



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0377001605100	377-160	160	6,5	1	140

You will find VDE- and electronic pliers on page no. 305



304-S3

MECHANIC'S PLIER ASSORTMENT

- 3 pcs.
- carton box packed
- ground, with red dip insulated handles



Code	Number	Contents	Pieces	Weight/g
0304500301000	304-S3	370-200 Snipe Nose Plier with side cutter, straight 389-170 Heavy Duty Side Cutter 395-180 Combination Plier	1	650

304-S31

MECHANIC'S PLIER ASSORTMENT

- 3 pcs.
- carton box packed



Code	Number	Contents	Pieces	Weight/g
0304500311000	304-S31	132-240 Waterpump plier 389-170 Heavy Duty Side Cutter 395-180 Combination Plier	1	780

493 BI
MULTI PURPOSE "FIT" SHEAR PLIER

- combination of side, edge, combination plier and tin snip
- nonslip QUATROLIT®-2C-handles
- ELORA-high grade tool steel C45 / 1.0503

Code	Number	l/mm	l/Inch	Pieces	Weight/g
0493000000001	493BI	200	8	1	300

493-1
MULTI PURPOSE PLIER "MULTI-TOOL"

- Multifunctional tool for the industry, automotive, construction, sanitary and agriculture sector
- hammer, water pump plier, wire cutter, combination plier, side cutter, wrench and driller in one tool
- black, ground head
- dip insulated PVC handles
- ELORA-high grade tool steel C60 / 1.0601

Code	Number	l/mm	l/Inch	Pieces	Weight/g
0493000010000	493-1	250	10	1	350

321-...
CARPENTER'S PINCER

- for highest operational demands
- inductive hardened cutting blades
- cutting blades hardness 61-63 HRC
- gunmetal-finish, ground head
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 9243 Form A

Code	Number	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0321001605100	321-160	1,8	160	6,5	1	200
0321001805100	321-180	2,0	180	7	1	290
0321002005100	321-200	2,2	200	8	1	390
0321002255100	321-225	2,2	230	9	1	640

499-...

CONCRETE R'S NIPPER

- Mechanic's nipper for heaviest action
- inductive hardened cutting edge, cutting blade hardness 61-63HRC
- gunmetal-finish, ground head
- ELORA-high grade tool steel C45 / 1.0503
- according to DIN ISO 9242 Form A



Code	Number	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0499002205100	499-220	2,4	220	9	1	330
0499002505100	499-250	2,4	250	10	1	390
0499002805100	499-280	2,8	280	11	1	430

489-...

SEAMING PLIER

- for seaming of metal sheets
- forged, black laquered
- jaw width 60 mm
- Model ELORA-No. 489-1 straight
- Model ELORA-No. 489-2 45° bent
- Model ELORA-No. 489-3 90° bent
- high grade tool steel C60 / 1.0601



489-1



489-2



489-3

Code	Number	l/mm	l/Inch	Pieces	Weight/g
0489000011000	489-1	280	11	1	630
0489000021000	489-2	280	11	1	650
0489000031000	489-3	280	11	1	660

1644-10

SEAMING OR BENDING PLIER

- for seaming of metal sheets
- forged, black laquered
- red dip insulated handles
- high grade tool steel



Code	Number	l/mm	Pieces	Weight/g
1644000107000	1644-10	255	1	450

130BI-240
WATERPUMP PLIER

- lay-on slip joint and teeth cut-out
- tooth inductive hardened, trap protection
- chrome plated, polished, dip insulated handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN ISO 8976, Form A

Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0130002402000	130BI-240	46	1.1/4	250	10	1	320

132-...
WATERPUMP PLIER

- box joint
- self-locking due to gripping surfaces staggered in reverse order
- teeth inductive hardened, trap protection
- ELORA-No. 132-190 adjustable in 6 positions, all other adjustable in 7 positions
- blue laquered, polished jaws
- handles with forged raffle
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN ISO 8976, Form C

Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0132001906500	132-190	34	1	175	7	1	160
0132002406500	132-240	43	1.1/4	250	10	1	300
0132003006500	132-300	48	1.1/2	300	12	1	460

132-S3
WATERPUMP PLIER ASSORTMENT


- 3 pcs.
- carton box packed
- box joint
- self-locking due to gripping surfaces staggered in reverse order
- teeth inductive hardened, trap protection
- ELORA-No. 132-190 adjustable in 6 positions, all others adjustable in 7 positions
- blue laquered, polished jaws
- handles with forged raffle
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN ISO 8976, Form C

Code	Number	Contents	Pieces	Weight/g
0132500036500	132-S3	Waterpump plier: 132-190, 132-240, 132-300	1	1,14

131

GROOVE WATERPUMP PLIER

- forged lay-on slip joint
- self-locking due to gripping surfaces staggered in reverse order
- teeth inductive hardened, trap protection
- nonslip QUATROLIT®-2C-handles
- chrome-plated, polished
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208
- according to DIN ISO 8976, Form B

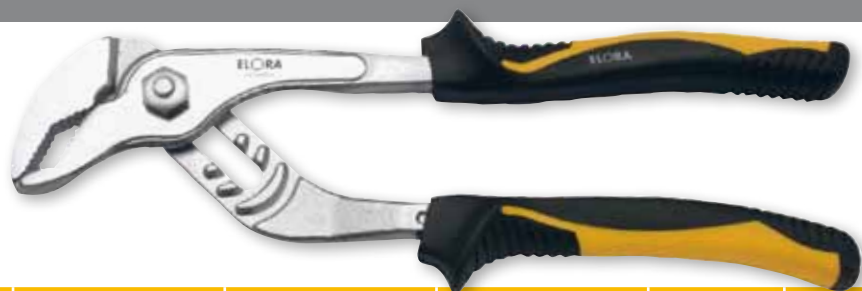

Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0131002402000	131BI-240	50	1.3/4	240	10	1	435

133-250

QUICK GRIPPING WATERPUMP PLIER

- quick adjustment by press a button
- self-locking due to gripping surfaces staggered in reverse order
- box joint
- absolute safe, no displacement during work
- teeth inductive hardened, trap protection
- chrome-plated, polished jaw
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208
- according to DIN ISO 8976, Form B



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0133002501000	133-250	250	10	1	455

134-...

QUICK GRIPPING WATERPUMP PLIER

- quick release due to box joint teeth raster
- absolute safe, no displacement during work
- self-locking due to gripping surfaces staggered in reverse order
- teeth inductive hardened, trap protection
- chrome-plated, polished jaws
- Chrome-Vanadium 31 CrV3 / 1.2208
- according to DIN ISO 8976, Form C



Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0134002501000	134-250	60	2.1/4	250	10	1	455
0134003751000	134-375	70	2.3/4	375	15	1	990

135-...

WATERPUMP PLIER

- groove box joint, continuously variable
- self-locking due to gripping surfaces staggered in reverse order
- teeth inductive hardened, trap protection
- MB: chrome-plated, polished jaws
- BI: nonslip QUATROLIT®-2C-handles
- chrome-plated, polished jaws
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208
- according to DIN ISO 8976, Form C



Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0135000051000	135-5MB	50	2.1/4	260	10.1/2	1	460
0135000052000	135-5BI	60	2.3/4	260	10.1/2	1	515

66A-...

PIPE WRENCH

- Swedish type
- for highest operational demands
- head angled at 90°
- drop forged, hardened and tempered
- teeth additionally inductive hardened
- self-locking due to gripping surfaces staggered in reverse order
- roll non-volatile
- red laquered
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208
- according to DIN ISO 5234, Form A



Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0066100346000	66A-1	40	1	340	13,5	1	1085
0066100426000	66A-1.1/2	55	1.1/2	400	16	1	1510
0066100496000	66A-2	67	2	530	21	1	2780
0066100636000	66A-3	103	3	720	29	1	4200

67E-...

PIPE WRENCH

- for highest operational demands
- head angled at 45°
- drop forged, hardened and tempered
- teeth additionally inductive hardened
- self-locking due to gripping surfaces staggered in reverse order
- roll non-volatile
- red laquered, polished jaws
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208
- according to DIN ISO 5234, Form B



Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0067100236000	67E-1/2	25	1/2	270	11	1	490
0067100346000	67E-1	40	1	320	13	1	960
0067100426000	67E-1.1/2	55	1.1/2	420	17	1	1420
0067100496000	67E-2	67	2	570	23	1	2900
0067100636000	67E-3	103	3	700	28	1	4400

68SN-...

PIPE WRENCH

- Swedish type
- 3 point S-jaw pipe wrench for highest operational demands
- head angled at 45°
- drop forged, hardened and tempered
- teeth additionally inductive hardened
- self-locking due to gripping surfaces staggered in reverse order
- roll non-volatile
- red laquered, polished jaws
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208
- according to DIN ISO 5234, Form B



Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0068100236000	68SN- 1/2	25	1/2	270	11	1	440
0068100346000	68SN- 1	40	1	320	13	1	885
0068100426000	68SN- 1.1/2	55	1.1/2	420	17	1	1490
0068100496000	68SN- 2	67	2	570	23	1	2500
0068100636000	68SN- 3	103	3	700	28	1	4200

136-...

QUICK ACTION PIPE WRENCH

- easy and quick adjusting due to knurled adjustment
- teeth additionally inductive hardened
- self-locking due to gripping surfaces staggered in reverse order
- high grade tool steel



Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0136001755100	136-175	35	1.3/8	175	7	1	300
0136002255100	136-225	42	1.5/8	225	9	1	510
0136002755100	136-275	61	2.3/8	275	11	1	815
0136003155100	136-315	74	3	315	12	1	985
0136003605100	136-360	90	3.9/16	360	14	1	1620

75-...

PIPE WRENCH "STILLSON"

- American type
- adjustable with knurled adjustment
- forged pieces hardened and tempered
- teeth additionally inductive hardened and staggered in reverse order
- steel-grey, handles blue laquered, polished jaws
- special high grade tool steel
- US-Norm GGG-W-651, class A, Type 1



Code	Number	Pipe Ø mm	Pipe Ø Zoll	l/mm	l/Inch	Pieces	Weight/g
0075000105200	75-10	35	1.3/8	250	10	1	550
0075000125200	75-12	43	1.3/4	300	12	1	800
0075000145200	75-14	49	1.7/16	350	14	1	965
0075000185200	75-18	61	2.3/8	450	18	1	1650
0075000245200	75-24	77	3	600	24	1	3150

137

PLUMBING WRENCH

- for chrome and nickel plated bathroom fittings
- with lever clamp
- with exchangeable plastic jaws, 8mm wide
- gunmetal-finish
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208



Code	Number	Span Width mm	l/mm	Pieces	Weight/g
0137000000000	137	65	275	1	720

138

SIPHON OR CONNECTOR PLIER

- loosening and tightening of pipe connections with round union nuts from \varnothing 25 mm
- loosening and tightening of ring lock connectors (like Canon connectors)
- drop forged, with slip on joint, 4 adjusting positions
- serrated jaws, jaw width 10 mm
- chrome-plated, PVC-dip insulated handles
- ELORA-No. 138-A with bolted plastic jaws
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208



Code	Number	Span Width mm	l/mm	Pieces	Weight/g
0138000000000	138	80	240	1	280
0138000001000	138-A	60	240	1	280
0138000000001	138-E	1 pair spare jaws for 138-A		1	5

462

BLIND-RIVET NUT PLIER

- to process blind rivets
- mandrel intake exchangeable on the head
- for blind rivets diameters: 2.4, 3.2, 4.0 and 4.8 mm
- black, plier body made of aluminium, leverage made of metal sheet
- PVC handles



Code	Number	l/mm	Pieces	Weight/g
0462000000000	462	280	1	625

08

491-2 WIRE CENTRE CUTTER

- ▶ for cutting of soft and hard wire
- ▶ maximum stability under load by additionally inductive hardening
- ▶ cutting edge hardness: 63-65 HRC
- ▶ for hardened steel wire, piano wire (tensile strength 2300 N/mm²)
- ▶ ground with red dip insulated handles
- ▶ ELORA-high grade tool steel C60 / 1.0601



Code	Number	Ø mm	l/mm	l/Inch	Pieces	Weight/g
0491000011000	491-2	2	200	8	1	340

288-... BOLT CUTTER

- ▶ inductive hardened jaws on the cutter head
- ▶ cutting capacity up to 48 HRC hardness
- ▶ easy and precise readjusting with double eccentric screws
- ▶ limbs made of steel tube with plastic handles
- ▶ jaws made of special high grade tool steel
- ▶ according to DIN ISO 9242



Code	Number	19 HRC Ø mm	40 HRC Ø mm	44 HRC Ø mm	l/mm	l/Inch	Pieces	Weight/g
0288003406000	288-340	6	5	-	330	13	1	775
0288004006000	288-400	6	5	-	400	16	1	850
0288004506000	288-450	8	7	5	460	18	1	1670
0288006106000	288-610	9	8	7	620	24	1	2370
0288008006000	288-800	11	9	8	780	30	1	4570
0288009006000	288-900	13	11	9	900	36	1	4980
0288003416000	288E-340			Spare jaw			1	210
0288004016000	288E-400			Spare jaw			1	210
0288004516000	288E-450			Spare jaw			1	420
0288006116000	288E-610			Spare jaw			1	770
0288008016000	288E-800			Spare jaw			1	1450
0288009016000	288E-900			Spare jaw			1	1450

08

289-...

STEEL WIRE MESH CUTTER

- ▶ inductive hardened jaws on the cutter head
- ▶ head angled at 75°
- ▶ easy and precise readjusting with double eccentric screws
- ▶ according to DIN 5743
- ▶ limbs made of steel tube with plastic handles
- ▶ jaws made of special high grade tool steel



Code	Number	19 HRC Ø mm	40 HRC Ø mm	l/mm	l/Inch	Pieces	Weight/g
0289008006000	289-800	9	8	790	31	1	3060
0289009006000	289-900	11	9	900	36	1	3400
0289008016000	289E-800	Spare jaw				1	850

4490

BAG OR WIRE TWISTER

- ▶ for fast and efficient closing of bags or connecting tyre levers
- ▶ with moulded plastic grip



Code	Number	l/mm	Pieces	Weight/g
4490000000000	4490	310	1	410

525-...

WIRE TWISTING PLIER


- ▶ for wire locking of metal fasteners
- ▶ serrated gripping for positive grip and side cutter
- ▶ for clockwise use and with automatic return
- ▶ jaws angled by 40°, for wires to Ø1,6mm
- ▶ gunmetal finish, head polished
- ▶ Chrome-Vanadium special steel



Code	Number	l/mm	Pieces	Weight/g
0525001503000	525-150	150	1	225
0525002303000	525-230	230	1	325

458
REVOLVING PUNCH AND EYELET PLIER


- for pre-punching and pressing of eyelets 458S-4,5, 458S-5,0, 458S-5,5
- bright nickel plated, with black ergonomically formed plastic handles
- high-strength special tool steel



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0458000000000	458	210	8,5	1	320

458S-...
EYELETS


- for pressing with ELORA-No. 458
- nickel plated
- sheet metal



Code	Number	Contents	Ø	Pieces	Weight/g
0458000450000	458S-4,5	100 eyelets	4,5	1	20
0458000500000	458S-5,0	100 eyelets	5,0	1	26
0458000550000	458S-5,5	100 eyelets	5,5	1	26

460
REVOLVING PUNCH PLIER WITH LEVERAGE


- 70% power saving by leverage
- for punching thin and strong awnings, fabrics, leather, textiles and thin metal sheet
- punching hole diameter 2,0-2,5-3,0-3,5-4,0-4,5 mm
- bright nickel plated, with black ergonomic formed plastic handles
- high-strength special tool steel



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0460000000000	460	250	10	1	430

461
REVOLVING PUNCH PLIER

- for punching thin and strong awnings, fabrics, leather, textiles and thin metal sheet
- punching hole diameter 2,0-2,5-3,0-3,5-4,0-4,5 mm
- nickel plated, with black ergonomic formed plastic handles
- high-strength special tool steel



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0461000000000	461	210	8,5	1	300

402-...
SHAPE CUTTING LEVER TIN SNIP

- for figures, short and straight cuts
- with leverage
- self-opening due to mounted leaf spring, with lock
- blades with micro denticulation to maximize the safety factor against sliding
- blades additionally inductive hardened and ground
- nonslip 2C-handles with trap protection
- for metal sheet thickness of max. 1,2mm with a tensile strength of 600 N/mm²



Code	Number	Type of Cut	l/mm	l/Inch	Length of cutting edges mm	Pieces	Weight/g
0402002501001	402/1-L	left cutting	250	10	38	1	390
0402002501003	402/1-G	straight cutting	250	10	44	1	390
0402002501002	402/1-R	right cutting	250	10	38	1	390

402/1 S3
SHAPE CUTTING LEVER TIN SNIP SET

- 3 pcs.
- carton box packed
- for figures, short and straight cuts
- with leverage
- self-opening due to mounted leaf spring, with lock
- blades with micro denticulation to maximize the safety factor against sliding
- blades additionally inductive hardened and ground
- nonslip 2C-handles with trap protection
- for metal sheet thickness of max. 1,2 mm with a tensile strength of 600 N/mm²



Code	Number	Contents	Pieces	Weight/g
0402500031000	402/1 S3	Figure Snips 402/1-L, 402/1-R, 402/1-G	1	1170

08

483L / 483R

SHAPE CUTTING LEVER TIN SNIP

- for short, straight and figure cuts, small radius
- with leverage
- self-opening due to mounted leaf spring, with lock
- burr-free cut
- adjustable, bolted joints
- blades with micro denticulation to maximize the safety factor against sliding
- blades additionally inductive hardened and ground, 60-62 HRC
- with plastic handles and trap protection
- for metal sheet thickness of max. 1,8 mm with a tensile strength of 400 N/mm² or 1,2 mm with a tensile strength of 600 N/mm²
- high grade tool steel, forged



Code	Number	Type of Cut	l/mm	l/Inch	Length of cutting edges mm	Pieces	Weight/g
0483000016000	483L	left cutting	250	10	35	1	460
0483000026000	483R	right cutting	250	10	35	1	460

484L / 484R

IDEAL LEVER TIN SNIP

- for short, straight and figure cuts, big radius
- with leverage
- self-opening due to mounted leaf spring, with lock
- burr-free cut
- adjustable, bolted joint
- blades with micro denticulation to maximize the safety factor against sliding
- blades additionally inductive hardened and ground, 60-62 HRC
- with plastic handles and trap protection
- for metal sheet thickness of max. 1,8 mm with a tensile strength of 400 N/mm² or 1,2 mm with a tensile strength of 600 N/mm²
- high grade tool steel, forged



Code	Number	Type of Cut	l/mm	l/Inch	Length of cutting edges mm	Pieces	Weight/g
0484000016000	484L	left cutting	250	10	30	1	515
0484000026000	484R	right cutting	250	10	30	1	515

284-250

BERLIN PATTERN TIN SNIP

- for long straight cuts
- blades additionally inductive hardened and ground, 56-58 HRC
- adjustable, bolted joint
- black handles, PVC dip coated, trap protection, opening spring
- for ELORA-No. 284-250: metal sheet thickness of max. 1,5 mm with a tensile strength of 400 N/mm² or 1 mm with 600 N/mm²
- high grade tool steel, forged




Code	Number	l/mm	l/Inch	Length of cutting edges mm	Pieces	Weight/g
0284002506000	284-250	250	10	60	1	440

1483-...

SHAPE CUTTING TIN SNIP

- for short, straight and figure cuts, small radius
- blades additionally inductive hardened and ground, 56-59 HRC
- adjustable, bolted joint
- black handles, PVC dip coated, trap protection, opening spring
- for metal sheet thickness of max. 1,5 mm with a tensile strength of 400 N/mm² or 1 mm with 600 N/mm²
- high grade tool steel, forged

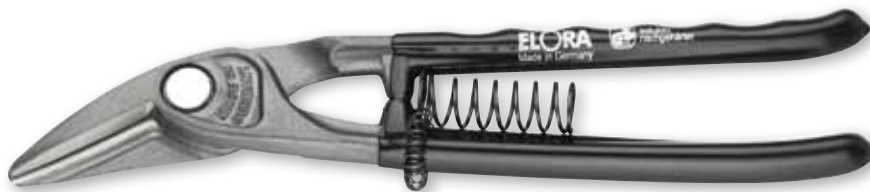

Code	Number	Type of Cut	l/mm ┆	l/Inch ┆	Length of cutting edges mm	Pieces ☞	Weight/g ⚖
1483002506000	1483L-250	left cutting	250	10	42	1	400
1483012506000	1483R-250	right cutting	250	10	42	1	400

1484-...

IDEAL TIN SNIP

- for continuous cuts and figure cuts
- blades additionally inductive hardened and sharpened, 56-59 HRC
- adjustable, bolted joint
- black handles, PVC dip coated, trap protection, opening spring
- for metal sheet thickness of max. 1,5 mm with a tensile strength of 400 N/mm² or 1 mm with 600 N/mm²
- high grade tool steel, forged



Code	Number	Type of Cut	l/mm ┆	l/Inch ┆	Length of cutting edges mm	Pieces ☞	Weight/g ⚖
1484002606000	1484L-260	left cutting	260	10,25	35	1	540
1484012606000	1484R-260	right cutting	280	10,25	35	1	540

488-...

PUNCH TIN SNIP

- for short, straight and figure cuts, big radius
- blades additionally inductive hardened and ground, 56-59 HRC
- adjustable, bolted joint
- black handles, PVC dip coated, trap protection, opening spring
- for metal sheet thickness of max. 1,5 mm with a tensile strength of 400 N/mm² or 1 mm with 600 N/mm²
- high grade tool steel, forged



Code	Number	Type of Cut	l/mm ┆	l/Inch ┆	Length of cutting edges mm	Pieces ☞	Weight/g ⚖
0488002506000	488L-250	left cutting	250	10	42	1	475
0488002516000	488R-250	right cutting	250	10	42	1	475

497R-300

PELICAN TIN SNIP

- for long straight continuous cuts
- blades additionally inductive hardened and ground, 56-59 HRC
- adjustable, bolted joint
- black handles, PVC dip coated, trap protection, opening spring
- for metal sheet thickness of max. 1,8 mm with a tensile strength of 400 N/mm² or 1 mm with 600 N/mm²
- high grade tool steel, forged



Code	Number	Type of Cut	l/mm	l/Inch	Length of cutting edges mm	Pieces	Weight/g
0497003006000	497R-300	right cutting	300	12	60	1	845

401-...

AMERICAN TINMANS SHEAR


- for long straight cuts
- blades additionally inductive hardened and ground, 57-59 HRC
- adjustable, bolted joint
- high grade tool steel, forged
- ELORA-No. 401/1 with trap protection
- ELORA-No. 401/2 black handles, PVC dip coated
- trap protection



Code	Number	l/mm	l/Inch	Length of cutting edges mm	Pieces	Weight/g
0401001751001	401/1-175	175	7	40	1	210
0401002001001	401/1-200	200	8	45	1	240
0401002501001	401/1-250	250	10	65	1	440
0401003001001	401/1-300	300	12	80	1	660
0401003501001	401/1-350	350	14	90	1	800
0401001751002	401/2-175	175	7	40	1	210
0401002001002	401/2-200	200	8	45	1	240
0401002501002	401/2-250	250	10	65	1	440
0401003001002	401/2-300	300	12	80	1	660
0401003501002	401/2-350	350	14	90	1	800

498-...
UNIVERSAL SCISSORS


- for cutting thin metal sheet, wire, plastics, adhesive weights, carpet, paper, etc.
- self-opening, one-hand lock function
- plastic handles
- made of stainless steel



Code	Number	l/mm	l/Inch	Length of cutting edges mm	Pieces	Weight/g
0498000016000	498-1	140	5,5	31	1	50
0498000026000	498-2	190	7,5	42	1	108

498-5
UNIVERSAL SCISSORS, BENT

- for cutting thin metal sheet, wire, plastics, adhesive weights, carpet, paper, etc.
- bent head
- self-opening, one-hand lock function
- plastic handles
- made of stainless steel




Code	Number	l/mm	l/Inch	Length of cutting edges mm	Pieces	Weight/g
0498000056000	498-5	190	7,5	38	1	108

You will find wire snips on page 298




500H
HOLDER FOR ELORA-GRIP PLIERS


- ▶ inserted into the holder ELORA grip pliers can be used as bench vise for simple works to screw on a work table or a work bench
- ▶ fits to all 8" and 10" ELORA grip pliers and ELORA-No. 510-280, 510-280A, 511-280 and 524
- ▶ black laquered



Code	Number	Span Width mm	l/mm	Pieces	Weight/g
0500000003000	500H	0-50	110	1	200

500-...
GRIP PLIER WITH WIRE CUTTER, CURVED JAWS


- ▶ for round and flat material
- ▶ with adjustment screw
- ▶ quick release lever with return spring
- ▶ forged, hardened and tempered half-round jaws
- ▶ nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	l/mm	l/Inch	Pieces	Weight/g
0500001253000	500-125	25	125	5	1	195
0500001803000	500-180	35	180	8	1	360
0500002503000	500-250	50	250	10	1	570
0500003003000	500-300	65	300	12	1	895

500P-...
PRISM GRIP PLIER


- ▶ for round and flat material
- ▶ 3-point support for any material profile
- ▶ with adjustment screw
- ▶ quick release lever with return spring
- ▶ forged, hardened and tempered prism jaws
- ▶ nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	l/mm	l/Inch	Pieces	Weight/g
0500011803000	500P-180	25	180	8	1	280
0500012503000	500P-250	45	250	10	1	750
0500013003000	500P-300	45	300	12	1	975

500G-250
GRIP PLIER, STRAIGHT JAWS

- ▶ for flat material
- ▶ with adjustment screw
- ▶ quick release lever with return spring
- ▶ forged, hardened and tempered straight jaws
- ▶ nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	l/mm	l/Inch	Pieces	Weight/g
0500202503000	500G-250	40	250	10	1	510

502-...

IDEAL GRIP PLIER

- ▶ for round, profile and flat material
- ▶ combined jaw shape
- ▶ with adjustment screw and release lever
- ▶ quick release lever with return spring
- ▶ nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	l/mm	l/Inch	Pieces	Weight/g
0502001803000	502-180	45	180	8	1	365
0502002503000	502-250	45	250	10	1	570

501

PARALLEL-GRIP PLIER

- ▶ for round and flat material
- ▶ plier mouth with swivelling jaws
- ▶ with adjustment screw
- ▶ quick release lever with return spring
- ▶ nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	l/mm	l/Inch	Pieces	Weight/g
0501000000000	501	45	250	10	1	575

508-...

LONG NOSE OR CROW NOSE PLIER

- ▶ to clamp or remove round, profile and flat material in narrow and deep sections for e.g. motors, control cabinets etc.
- ▶ long, slim jaws with burner hole
- ▶ quick release lever with return spring
- ▶ drop-forged, nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	l/mm	l/Inch	Pieces	Weight/g
0508001653000	508-165	0-55	165	12	1	180
0508002353000	508-235	0-70	235	12	1	400
0508003003000	508-300	0-130	300	12	1	480

505-...

PARALLEL GRIP PLIER

- ▶ suitable for small round parts and bulky items
- ▶ for exceedingly high work pieces
- ▶ even for smaller round pieces
- ▶ clamp function
- ▶ parallel clamping surface with prism recess
- ▶ equal parallelism over the complete clamping range
- ▶ long slide (100-200 mm)
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0505001003000	505-100	65	100	280	12.1/2	1	950
0505002003000	505-200	65	200	280	12.1/2	1	1100
0505000003000	505K	Protection cap set for parallel grip plier (for gentle tightening of sensitive surfaces)				1	5

512-180

SHEET METAL GRIP PLIER

- for clamping, bending and folding of thin and soft metal sheet
- 80 mm width, parallel joint jaws
- quick release lever with return spring
- drop-forged, nickel-plated
- jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	l/mm	l/Inch	Pieces	Weight/g
0512101803000	512-180	0-45	200	8	1	500

507-165/165S

C-CLAMP GRIP PLIER

- to use instead of screw clamps
- movable steel jaws in the S version
- quick release lever with return spring
- drop-forged, nickel-plated
- jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208




Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0507101653000	507-165	0-60	45	165	6.1/2"	1	230
0507101663000	507-165S	0-50	45	165	6.1/2"	1	250

507-280/280S

C-CLAMP GRIP PLIER

- ▶ to use instead of screw clamps
- ▶ movable steel jaws in the S version
- ▶ quick release lever with return spring
- ▶ drop-forged, nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0507102803000	507-280	0-100	70	300	12	1	890
0507102813000	507-280S	0-70	90	300	12	1	960

507-460

C-CLAMP GRIP PLIER

- ▶ to use instead of screw clamps
- ▶ quick release lever with return spring
- ▶ drop-forged, nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0507104603000	507-460	0-260	250	460	18	1	1340

507-...

C-CLAMP GRIP PLIER

- ▶ to use instead of screw clamps
- ▶ movable steel jaws in the S version
- ▶ quick release lever with return spring
- ▶ drop-forged, nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0507106003000	507-600	0-400	400	630	25	1	1630
0507106013000	507-600S	0-400	400	630	25	1	1810

507A-...

ALUMINIUM C-CLAMP GRIP PLIER

- ▶ for clamping of profile material with high racks and for work on bulky work pieces
- ▶ the light alloy avoids the adhering of welding beads
- ▶ approx. 40% weight reduction for better handling in continuous operation
- ▶ quick release lever with return spring
- ▶ drop-forged, nickel-plated
- ▶ jaws made of heavy-duty light metal alloy



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0507203003000	507A-300	0-90	70	300	12	1	640
0507203603000	507A-360	0-180	140	360	14	1	870

509-500

C-CLAMP GRIP PLIER

- ▶ for clamping of profile material with high racks and for work on bulky work pieces, especially appropriate for metal construction and car body work
- ▶ quick release lever with return spring
- ▶ drop-forged, nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0509005003000	509-500	0-270	300	500	20	1	1785

510-280

WELDER'S GRIP PLIER

- ▶ for clamping of profiles and straps, especially appropriate to connect two working pieces of the same thickness
- ▶ the large opening allows a good overview during welding
- ▶ quick release lever with return spring
- ▶ drop-forged, nickel-plated
- ▶ jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0510102803000	510-280	0-90	80	300	12	1	930

510A-280

WELDER'S ALUMINIUM GRIP PLIER

- for clamping of profiles and straps, especially appropriate to connect two working pieces of the same thickness
- the light metal alloy avoids the adhering of welding beads
- approx. 25% weight reduction for better handling in continuous operation
- the large opening allows a good overview during welding
- quick release lever with return spring
- drop-forged, nickel-plated
- jaws made of heavy-duty light metal alloy



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0510202803000	510A-280	0-100	70	300	12	1	720

511-280

PIPE WELDERS GRIP PLIER

- for centered clamping of two close-fitting pipes for welding, drilling, soldering etc.
- the large opening allows a good overview during welding
- quick release lever with return spring
- drop-forged, nickel-plated
- jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	Span Width mm	Radial mm	l/mm	l/Inch	Pieces	Weight/g
0511102803000	511-280	0-100	90	300	12	1	925

524-...

CHAIN GRIP PLIER

- for clamping of any shaped profile, especially appropriate in narrow and difficult to reach areas like oil filters, exhaust pipes, etc.
- ELORA-No. 524E is an extension as well as spare chain at the same time
- quick release lever with return spring
- drop-forged, nickel-plated
- jaws made of ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208



Code	Number	for ø up to mm	l/mm	Pieces	Weight/g
0524002503000	524-250	160	250	1	900
0524003003000	524-300	160	300	1	1110
0524400003000	524-E	spare and extension chain	480	1	310

500-S4

GRIP PLIER SET

- 4 pcs.
- carton box packed



Code	Number	Contents	Pieces	Weight/g
0500500401000	500-S4	500-250 Rip Plier with Wire Cutter, curved Jaws 508-165 Long Nose- or Crow Nose Plier 507-280 C-Clamp Grip Plier 519 Micro Grip Plier	1	1760

Advantages of the elora-axial-grip-pliers:

- ergonomical design. Round contours for operator's comfort.
- small size and linear motion allows use for many shapes even in awkward sections.
- easy push-button release.
- one-hand-operating.


Application:

Axial Grip Pliers are suitable for body repair jobs and welding work. No provisional welding required to hold body parts for assembly.

519

MICRO GRIP PLIER

- high grade, hardened and tempered aluminium alloy, 120 g light only
- ergonomic design with rounded shape
- one-hand operation
- axial movement of the moveable jaw
- brass screw is also the moveable jaw
- brass screw/ moveable jaw made of solid brass
- knurled knob of the brass adjust screw
- anodized body




Code	Number	Span Width mm	l/mm	Pieces	Weight/g
0519000003000	519	12	92	1	120

513

AXIAL GRIP PLIER

- for clamping of overlapping metal sheets during spot welding, makes it possible to weld 4 clean spots without moving the plier, for use on doorways, side pieces, etc.
- slim shape with quick release lever
- jaw adjustment: 0-15 mm
- jaw wideness: 57 mm
- bright nickel-plated, black jaws
- jaws made of high-strength steel

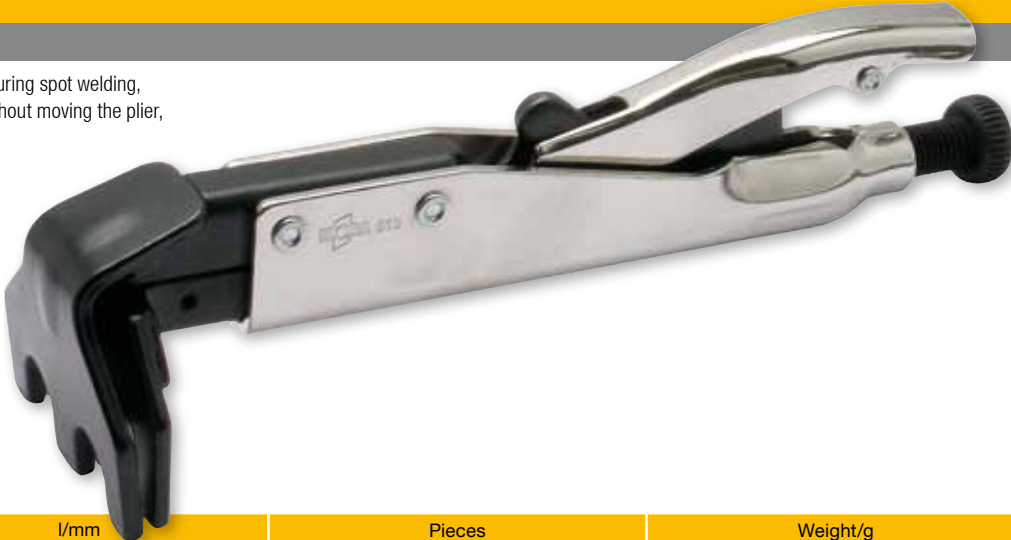

Code	Number	l/mm	Pieces	Weight/g
0513000003000	513	195	1	480

514

AXIAL GRIP PLIER

- ▶ for clamping of metal sheet with high racks, especially appropriate for work on side panels and rear parts, U-shaped body profiles etc. and for welding in folds on VW, Audi, Opel, Ford, various Japanese cars
- ▶ slim shape with quick release lever
- ▶ jaw adjustment: 0-15 mm
- ▶ jaw wideness: 45 mm
- ▶ bright nickel-plated, black jaws
- ▶ jaws made of high-strength steel



Code	Number	l/mm	Pieces	Weight/g
0514000003000	514	235	1	490

515

AXIAL GRIP PLIER

- ▶ for clamping of U-profiles and U-shaped body profiles, especially appropriated for adjusting rear parts and rear side panels
- ▶ slim shape with quick release lever
- ▶ jaw adjustment: 0-15 mm
- ▶ jaw wideness: 18 mm
- ▶ bright nickel-plated, black jaws
- ▶ jaws made of high-strength steel



Code	Number	l/mm	Pieces	Weight/g
0515000003000	515	210	1	430

516

AXIAL GRIP PLIER

- ▶ for the rectangular clamping of two metal sheet pieces of the same thickness, for welding from fillet straight to the metal sheet edge
- ▶ slim shape with quick release lever
- ▶ jaw adjustment: 0-10 mm
- ▶ jaw wideness: 50 mm
- ▶ bright nickel-plated, black jaws
- ▶ jaws made of high-strength steel



Code	Number	l/mm	Pieces	Weight/g
0516000003000	516	200	1	470

517

AXIAL GRIP PLIER

- for clamping of U-profiles and U-shaped body profiles, especially appropriate for adjusting door sills, wheel housings, roofs and side panels for afterwards spot welding between the plier jaws
- slim shape with quick release lever
- jaw adjustment: 0-15 mm
- jaw wideness: 45 mm
- bright nickel-plated, black jaws
- jaws made of high-strength steel



Code	Number	l/mm	Pieces	Weight/g
0517000003000	517	220	1	450

518

AXIAL GRIP PLIER

- for work in tight curves, especially appropriate for work on doorways, wheel housings, tail gates, bonnets and rear side panels, without moving the plier
- slim shape with quick release lever
- jaw adjustment: 0-18 mm
- jaw wideness: 18 mm
- bright nickel-plated, black jaws
- jaws made of high-strength steel



Code	Number	l/mm	Pieces	Weight/g
0518000003000	518	195	1	420

519S-6

AXIAL GRIP PLIER SET

- 6 pcs.
- carton box packed



Code	Number	Contents	Pieces	Weight/g
0519500063000	519-S6	Axial Grip Pliers 513, 514, 515, 516, 517, 518	1	2740

473-J 1-4

CIRCLIP PLIER FOR INTERNAL RETAINING RING

- for internal retaining rings acc. to DIN 472, DIN 984
- straight jaws
- chrome plated, polished joint, chequered handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN 5256 Form C



Code	Number	for circlips from ... to Ø mm	l/mm	l/Inch	Pieces	Weight/g
0473010082000	473-J1	8-25	140	5,5	1	96
0473010192000	473-J2	19-60	170	7	1	145
0473010402000	473-J3	40-100	220	9	1	215
0473010852000	473-J4	85-165	320	13	1	410

473-J 11-41

CIRCLIP PLIER FOR INTERNAL RETAINING RING

- for internal retaining rings acc. to DIN 472, DIN 984
- jaws bent at 90°
- chrome plated, polished joint, chequered handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN 5256 Form D



Code	Number	for circlips from ... to Ø mm	l/mm	l/Inch	Pieces	Weight/g
0473020082000	473-J11	8-25	140	5,5	1	94
0473020192000	473-J21	19-60	170	7	1	145
0473020402000	473-J31	40-100	220	9	1	210
0473020852000	473-J41	85-165	320	13	1	420

474-A1-4

CIRCLIP PLIER FOR EXTERNAL RETAINING RING

- for external retaining rings acc. to DIN 471, DIN 983
- straight jaws, self-opening due to mounted double leaf spring
- chrome plated, polished joint, chequered handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN 5254 Form A



Code	Number	for circlips from ... to Ø mm	l/mm	l/Inch	Pieces	Weight/g
0474010102000	474-A1	10-25	135	5	1	70
0474010192000	474-A2	19-60	170	7	1	165
0474010402000	474-A3	40-100	220	9	1	260
0474010852000	474-A4	85-165	320	13	1	440

474-A11-41

CIRCLIP PLIER FOR EXTERNAL RETAINING RING

- for external retaining rings acc. to DIN 471, DIN 983
- jaws bent at 90°, self-opening due to mounted double leaf spring
- chrome plated, polished joint, chequered handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN 5254 Form B



Code	Number	for circlips from ... to Ø mm	l/mm	l/Inch	Pieces	Weight/g
0474020102000	474-A11	10-25	135	5	1	70
0474020192000	474-A21	19-60	170	7	1	165
0474020402000	474-A31	40-100	220	9	1	260
0474020852000	474-A41	85-165	320	13	1	440

469

CIRCLIP PLIER FOR EXTERNAL RETAINING RINGS

- for external retaining rings without holes
- straight jaws, self-opening due to mounted double leaf spring
- chrome-plated, polished joint, chequered handles
- ELORA-Chrome-Vanadium 31 CrV3 / 1.2208



Code	Number	l/mm	l/Inch	Pieces	Weight/g
0469000000000	469	175	7	1	170

404-S41

CIRCLIP PLIER SET

- 4 pcs.
- carton box packed
- chequered handles
- chrome-plated, polished joint



Code	Number	Contents	Pieces	Weight/g
0404500411000	404-S41	Circlip Plier for Internal Retaining Ring 473-J 2; 473-J 21 Circlip Plier for External Retaining Ring 474-A2; 474-A21	1	620

404-S8

CIRCLIP PLIER SET

- 8 pcs.
- assortment in convenient plastic case
- chrome plated, polished joint, chequered handles



Code	Number	Contents	Pieces	Weight/g
0404500801000	404-S8	Circlip Plier for Internal Retaining Ring 473-J 1; 473-J 11; 473-J 2; 473-J 21 Circlip Plier for External Retaining Ring 474-A1; 474-A11; 474-A2; 474-A21	1	1660

You will find the matching OMS-20 module on page no. 53



You will find the matching MS-26 module on page no. 60



383-J1-J4

CIRCLIP PLIER FOR INTERNAL RETAINING RING

- for internal retaining rings acc. to DIN 472, DIN 984
- straight jaws
- gunmetal-finish, ground joint
- red dip insulated handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN 5256 Form C



Code	Number	for circlips from ... to Ø mm	l/mm	l/Inch	Pieces	Weight/g
0383010085100	383-J1	8-25	140	5,5	1	85
0383010195100	383-J2	19-60	180	7	1	145
0383010405100	383-J3	40-100	220	9	1	225
0383010855100	383-J4	85-165	320	13	1	440

383-J11-J41

CIRCLIP PLIER FOR INTERNAL RETAINING RING

- for internal retaining rings acc. to DIN 472, DIN 984
- jaws bent at 90°
- gunmetal-finish, ground joint
- red dip insulated handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN 5256 Form D



Code	Number	for circlips from ... to Ø mm	l/mm	l/Inch	Pieces	Weight/g
0383020085100	383-J11	8-25	130	5	1	85
0383020195100	383-J21	19-60	170	7	1	145
0383020405100	383-J31	40-100	210	8,5	1	225
0383020855100	383-J41	85-165	310	12,5	1	440

384-A0-A4

CIRCLIP PLIER FOR EXTERNAL RETAINING RING

- for external retaining rings acc. to DIN 471, DIN 983
- straight jaws, self-opening due to mounted spiral spring
- gunmetal-finish, ground joint
- red dip insulated handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN 5254 Form A




Code	Number	for circlips from ... to Ø mm	l/mm	l/Inch	Pieces	Weight/g
0384010035100	384-A0	3-10	140	5,5	1	80
0384010105100	384-A1	10-25	140	5,5	1	80
0384010195100	384-A2	19-60	180	7	1	140
0384010405100	384-A3	40-100	220	9	1	205
0384010855100	384-A4	85-165	320	13	1	430

384-A01-A41

CIRCLIP PLIER FOR EXTERNAL RETAINING RING

- for external retaining rings acc. to DIN 471, DIN 983
- jaws bent at 90°, self-opening due to mounted spiral spring
- gunmetal-finish, ground joint
- red dip insulated handles
- ELORA-Chrome-Vanadium 31 CrV 3 / 1.2208
- according to DIN 5254 Form B

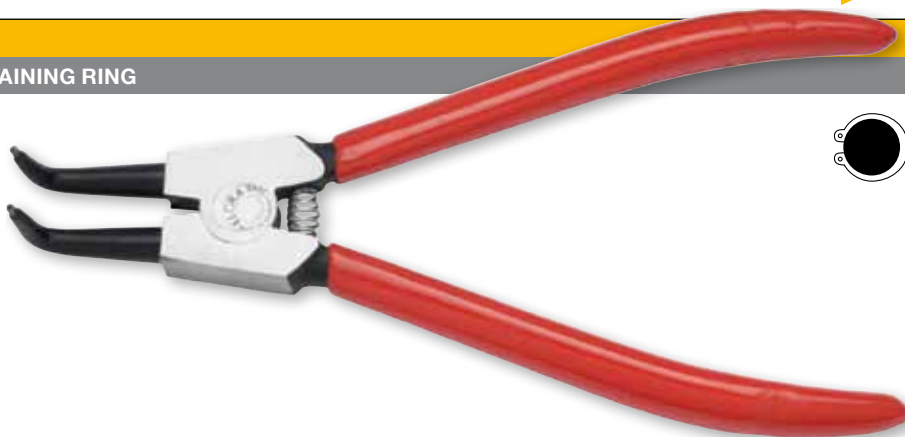

Code	Number	for circlips from ... to Ø mm	l/mm	l/Inch	Pieces	Weight/g
0384020035100	384-A01	3-10	130	5	1	80
0384020105100	384-A11	10-25	130	5	1	80
0384020195100	384-A21	19-60	170	7	1	140
0384020405100	384-A31	40-100	210	8,5	1	205
0384020855100	384-A41	85-165	310	12,5	1	430

304-S4

CIRCLIP PLIER SET

- 4 pcs.
- carton box packed
- red dip insulated handles



Code	Number	Contents	Pieces	Weight/g
0304500401000	304-S4	Circlip Plier for Internal Retaining Ring 383-J 2; 383-J 21 Circlip Plier for External Retaining Ring 384-A2; 384-A21	1	570

You will find the matching MS-25 module on page no. 60



