

FORKLIFT

4-5 t

Internal Combustion
Counterbalanced Forklift Truck



MITRA TEKNIENDO SEJATI


CHL



RELIABLE ECONOMICAL
COMFORTABLE HIGH EFFICIENT

Manufacturer and Technical Data



Characteristics				CHL								
1.01	Manufacturer											
1.02	Model			CPC40	CPCD40	CP(Q)YD40	CPC45	CPCD45	CP(Q)YD45	CPC50	CPCD50	CP(Q)YD50
1.03	Power mode			Diesel		LPG	Diesel		LPG	Diesel		LPG
1.04	Rated capacity	Q	kg	4000			4500		5000			
1.05	Load center distance	c	mm				500					
1.06	Driving mode			Seated								
Dimensions												
2.01	Max. height,extended (With backrest)	H2	mm				4250					
2.02	Max.lifting height	H	mm				3000					
2.03	Height (mast lowered)	H1	mm				2275					
2.04	Free lifting height	H3	mm				150					
2.05	Backrest height (calculated from the surface of the fork)	H13	mm				1250					
2.06	Distance from the surface of the seat to the overhead guard	H6	mm				1020					
2.07	Height of overhead guard	H4	mm				2350					
2.08	Overall length (with/without fork)	L/L'	mm				4460/3240					
2.09	Front overhang	L2	mm				560					
2.10	Rear overhang	L3	mm				580					
2.11	Wheelbase	L1	mm				2100					
2.12	Towing coupling height	H9	mm				300					
2.13	Ground clearance (laden,between mast)	H5	mm				175					
2.14	Overall width	W1	mm				1480					
2.15	Distance across fork-arms, Max./Min.	W5	mm				1340/300					
2.16	Tread, front/rear	W3/W2	mm				1180/1190					
2.17	Min. outside turning radius	r	mm				2930					
2.18	Min. internal turning radius	r'	mm				215					
2.19	Min.right angle stacking aisle width	Ra	mm				2900					
2.20	Right angle stacking aisle width for pallet 1000 x1200mm	Ast	mm				4690					
2.21	Right angle stacking aisle width for pallet 800 x1200mm	Ast	mm				4890					
2.22	Mast tilt angle (forward/backward)	α/β	deg				6/12					
2.23	Fork size	L4xWxT	mm				1070x150x50					
Weight												
3.01	Total weight		kg	6290		6460	6490	6660	6750	6920		
3.02	Axle load (laden,front/rear)		kg	8675/1615		8815/1645	9600/1390	9680/1480	10430/1320	10500/1420		
3.03	Axle load (unladen,front/rear)		kg	2772/3518		2776/3694	2830/3660	2865/3795	2860/3890	2965/3955		
Wheels												
4.01	Wheels,number front/rear (x=driven wheels)			2X/2(Double-tyre 4X/2)								
4.02	Tyre type			Pneumatic tyre								
4.03	Tyre size,front			8.25-15-14PR					300-15-18PR			
4.04	Tyre size,rear			7.00-12-14PR					7.00-12-14PR			
4.05	Double-tyre size (front/rear)			8.25-15-14PR/7.00-12-14PR								
Other data												
5.01	Service brake			Vacuum assisted braking-pedal type (mechanical truck)/ hydraulic assisted braking-pedal type(hydrodynamic truck)								
5.02	Parking brake			Mechanical-hand lever								
5.03	Fuel tank capacity			90								

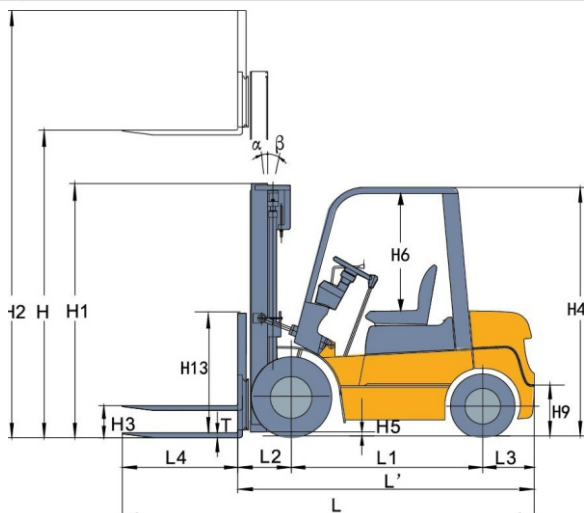

Ast: right angle stacking aisle width

a: Clearance

b: Load Length

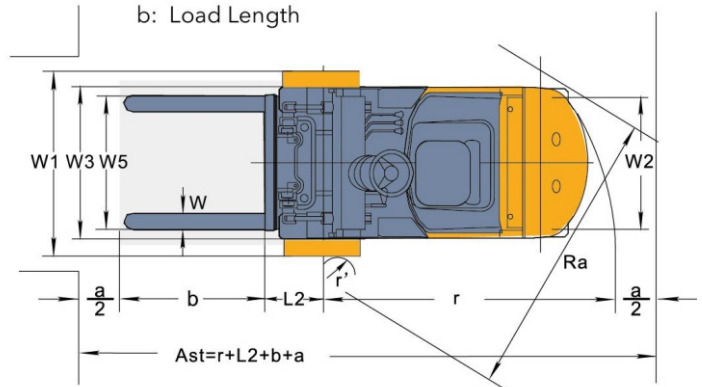

MITRA TEKNIENDO SEJATI

Jakarta

Galeri Niaga Mediterania 1
Jl. Pantai Indah Utara II Blok. X3 No. G8A-8B
Pantai Indah Kapuk - Jakarta Utara

Tangerang

Kawasan Industri Milenium Blok P2 No. 3
Jl. Pemda Tigaraksa, Sukamulya,
Cikupa, Tangerang - Banten
Telp. 021 59645008

Surabaya

Jl. Raya Gilang 8, Gilang, Kec. Taman,
Sidoarjo - Jawa Timur 61257
Telp. 031 99794078

Makassar

Jl. Ir. Sutarni, Pertamina (Pengisian Gas Elpiji)
PT. Pergudangan Permata Alam Blok B No. 10
Makassar - Sulawesi Selatan
Telp 0411 8037636

Samarinda

Jl. Ampera Pergudangan Mangkupalas Bisnis
Center Blok D20 Simpang Pasir
Palaran, Samarinda - Kalimantan Timur
Telp. 0541 7263751

Palembang

Jl. Nanas No.1 RT.07 RW.03 BTN Air Paku,
Tanjung Enim Selatan, Lawang Kidul,
Muara Enim - Sumatera Selatan