Lustrolite®

HIGH GLOSS WALL PANELS



KITCHEN AND BATHROOM DESIGN WILL NEVER BE THE SAME.

INTRODUCING LUSTROLITE.








Lustrolite® is an award winning high gloss acrylic wall panel. It's the perfect material to create stunning bathrooms, shower walls, and kitchen splashbacks.

Lustrolite is a replacement to tiles and looks like back painted glass. With a special hard coated top layer for extra scratch and chemical resistance, cleaning and maintaining your Lustrolite is nearly effortless.

- Brilliant mirror reflection high gloss finish
- ► Installs 3 × faster than tiles
- → 1/3 price of installing glass walls
- Effortless to clean, thanks to its advanced scratch resistant hard coating
- Can be cut and drilled with normal power tools (circular saws, jigsaws, planers)

- Half the weight of glass, but 25 x stronger, making handling and installation easy
- Adheres straight over existing tiles or waterproof board, making it perfect for renovations!
- Fantastic for hygiene –
 Lustrolite eliminates the need for grout, and its smooth surface won't harbor the build up of mould and bacteria

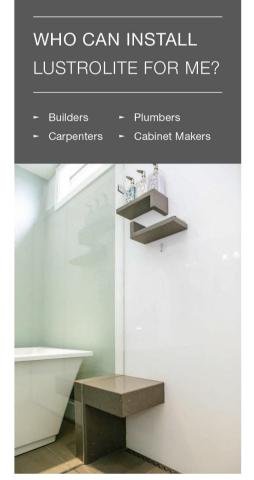



LUSTROLITE IS AVAILABLE IN SEVEN STUNNING COLOURS

Titan

THIS COLOUR IS NOT AVAILABLE IN INDONESIA















Environment

Lustrolite is a modern, recyclable material, created to have as minimal impact on the environment as possible. Lustrolite panels are inert, and don't release any emissions during use.

No Volatile Organic Compounds (VOCs) are produced in the advanced Lustrolite manufacturing process.

Cleaning

Lustrolite is easy to keep clean using warm soapy water and a microfibre cloth, chamois, or squeegee.

Its hygienic, non-stick surface will not harbor the build up of mould, bacteria, soap or calcium. Due to the large panel sizes, grout usage is eliminated.

Panel Sizes

Lustrolite is 4mm thick, and available in a range of panel sizes convenient for splashbacks, bathrooms and walls:

2440 1000

2070 1250

2700 × 760mm

Scratch Resistance

A high performance hard coat on the outer surface provides high scratch and chemical resistance, and affords effortless cleaning.

Lustrolite will not scratch, crack, warp, stain or discolour from normal residential use.

Edges

The edges of Lustrolite can be sanded and polished, or fitted with a range of Lustrolite Edge Profiles.

Lustrolite Edge Profiles are made from high quality Brushed Aluminium.







Transparency

Lustrolite is opaque – no light is transmitted through the rear colour layer. However, it can be effectively side or top lit.


The colour layer is permanently fused to the clear acrylic and will not separate. The colour layer is extremely stable and will not be affected by moisture.

Chemical Resistance

The following chemicals had no effect on the panel surface: Spray n' Wipe®, Windex® Glass Cleaner, Acetic Acid 5%, Citric Acid, Mineral Turpentine, Bleach or Isopropyl.

Installation

Lustrolite installs using double-sided tape and neutral cure silicone.




4mm expansion gaps are essential around the perimeter of each panel and between panels.

Lustrolite can be cut and drilled using regular power tools (circular saws, jigsaw, battery drill, planers etc.)

Always clamp the Lustrolite panel to a sacrificial support timber board before cutting or drilling.

Please Note

Lustrolite must be a minimum of 50mm away from the edge of ceramic, electric and induction cooktops.





Lustrolite is not suitable behind gas cooktops.



PT. CREATURA DEKORASI INDONESIA Rukan Colombus Blok B No.22-23, Green Lake City Cipondoh, Tangerang - Indonesia

General Inquiry & Sales / Informasi Umum & Penjualan :

Rudy Yanto

Mobile / WhatsApp : +62 852 827 55333 (Fast Response)
Phone / Fax : +62 21 2941 3885
e : rudy.EGR@gmail.com



