


SEWAGE SUBMERSIBLE PUMP c/w GRINDER



AR WQD 7 -16 - 1,5 F QG

- AR = ARITA Product
- WQD = Single Phase Submersible Pump
- 7 = Rated Flow (m³/h)
- 8 = Rated Head (m)
- 0.75 = Power (Kw)
- F = Automatic
- QG = c/w Grinder

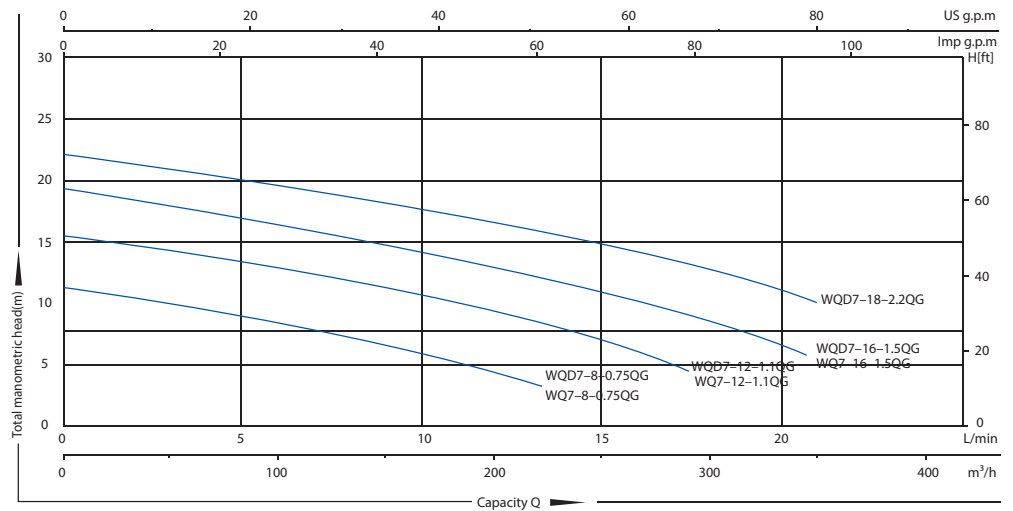

Application Area

Suitable for using in Sump Pit ,
Sanitary , and any industrial Sewage

Operating limits

Protection class : IP68
Max. temperature: 40 C
Max PH : 4 – 10

Component and Material

Pump Casing : SS304
Impeller : Cast Iron
Diffuser : Cast Iron
Mechanical Seal : Ceramics Graphite
Oil Lubricant : Food Grade
Body : Cast Iron
Shaft : Stainless Steel 304
Suction Strainer : Cast Iron

TIPE	POWER		AUTO	OUTLET (Inch)	Rated Head (m)	Max.Head (m)	Rated Flow (m ³ /h)	Max Flow (m ³ /h)	G.W (Kg)
	Watt	Hp							
ARWQD7-8-0.75 FQG	750	1	Yes	2	8	13	7	12	23
ARWQD7-12-1.1 FQG	1100	1,5	Yes	2	12	15.5	7	14	24
ARWQD7-16-1.5 FQG	1500	2	Yes	2	16	17.3	7	18.4	27