

## SUBMERSIBLE PUMP LARGE FLOW



=< 4Inch



=>6Inch

### AR WLF 150

AR : ARITA PRODUCT

WLF : SUBMERSIBLE LARGE FLOW

150 : Outlet (mm)

### Application Area

Suitable for using in seawater for fish ponds, and another else

### Operating limits

Protection class : IP68

Max. temperature : 40 C

### Component and Material

Impeller : Bronze

Seal : Dual Mech Seal



Housing : SUS304

Top Cov : Cast Iron

Seal Housing : Cast Iron

Bearing Base : Cast Iron

Frame : SUS304

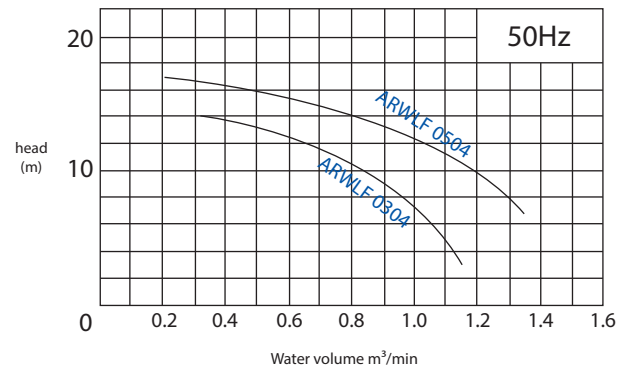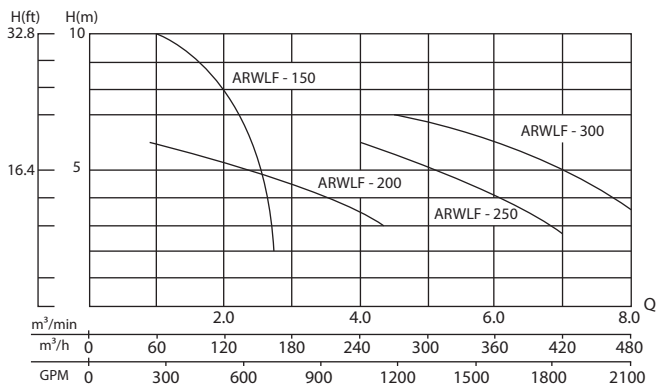

Type	Power		Voltage	Speed (Rpm)	Outlet (inch)	Rated Flow	Rated Head (m)	Max.Solid Passage (mm)	G.W (Kg)
	Kw	Hp							
ARWLF-80	2.2	3	380Volt	2900	3	36	13	15	45
ARWLF-100	3.7	5	380Volt	2900	4	60	12	16	65
ARWLF-150	3.7	5	380Volt	1450	6	120	8	20	87
ARWLF-200	5.5	7.4	380Volt	1450	8	210	4	22	120
ARWLF-250	7.5	10	380Volt	1450	10	330	4,5	22	160
ARWLF-300	11	15	380Volt	1450	12	420	5	23	212