

Cobra Combi: Petrol drill and breaker (Hex 22x108) (7/8x4 1/4)

8318 0800 08



[Create PDF sheet](#)

[Request information](#)

Contact

[View contact details](#)

QUICK LINKS

[Atlas Copco Print Shop](#)

[Atlas Copco Multimedia Gallery](#)

[Product information](#)

[Photos & Video](#)

[Related products](#)

[Leaflets](#)

Atlas Copco's petrol driven drill and breakers cover a wide range of applications like splitting rocks, breaking concrete, cutting asphalt, tamping ballast and more. All without the need for power packs or cables. The Cobra Combi is not only a self-contained breaker, it's a powerful drill as well. It can sink holes to the depth of 2 metres, and drill up to 30 cm per minute in solid granite.

Features & benefits

- Easy to transport
- Quick set-up time
- HAPS™ Hand and Arm Protection System
- Low emissions
- Low noise

Applications

The multi-purpose Cobra Combi can be used for:

- Drilling and slipping rocks
- Breaking concrete
- Cutting asphalt
- Tamping and compacting
- Driving spikes, tubes, poles, ground rods and probes
- Digging ditches and holes

Technical description

AC Cobra brochure (1205kB, Pdf document) - [Download](#)

Atlas Copco Cobra brochure (applicable only for USA) (962kB, Pdf document) - [Download](#)


Technical data

Units: **Metric** [Imperial](#)

Technical Specifications	
Weight	25 kg
Length	732 mm
Depth	281 mm
Width across handles	585 mm
Impact energy	22-25 (at 2700 bpm)

Impact rate, full speed	2700 bpm
Penetration rate with 34 mm drill bit	200 - 300 mm/min
Max drilling depth	2 m
Drill rotation speed	250 rpm
Engine	
Engine Type	1 cylinder, two-stroke
Cylinder Displacement	185 cc
Power	2 kW
Cooling System	Fan cooled
Starter System	Magnapull
Fuel Type	Petrol, 90-100 octane unleaded
Fuel capacity	1.2 l
Fuel consumption	1.3 - 1.5 l/h
Fuel mixture (%)	2
Oil type	two-stroke oil or similar
Vibration and Sound	
Vibration level 3 axes (ISO 28927-10)	5.8 (breaking) 9.3 (drilling)
Sound power level guaranteed (2000/14/EC) 1)	108 dB(A)
Sound pressure level (ISO 11203) Lp, r=1m	95 dB(A)

Product views

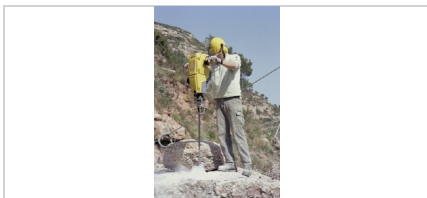

You may also be interested in



2-stroke OIL

Value Package 12 x 1l 2-stroke OIL

9234 0014 06

[Request information](#)



2-stroke OIL

1l 2-stroke OIL

9238 2743 50

[Request information](#)



Cobra & Compactor IMPACT-OIL

1l Cobra & Compactor IMPACT-OIL

9234 0012 03

[Request information](#)



Cobra & Compactor IMPACT-OIL

Value package 20x1l Cobra & Compactor IMPACT-OIL

9234 0014 05

[Request information](#)



Petrol Rock Drills

Cobra range – English (2371kB, Pdf document) - [Download](#)
Cobra range – Swedish (1074kB, Pdf document) - [Download](#)
Cobra range – French (1081kB, Pdf document) - [Download](#)
Cobra range – German (1095kB, Pdf document) - [Download](#)
Cobra range – Spanish (1074kB, Pdf document) - [Download](#)
Cobra range – Portuguese (1080kB, Pdf document) - [Download](#)
Cobra range – Italian (1080kB, Pdf document) - [Download](#)
Cobra range – Dutch (1084kB, Pdf document) - [Download](#)
Cobra range – Czech (1244kB, Pdf document) - [Download](#)
Cobra range – Russian (1241kB, Pdf document) - [Download](#)
Cobra range – Turkish (1254kB, Pdf document) - [Download](#)
Cobra range – US English (4758kB, Pdf document) - [Download](#)
Cobra range – Japanese (2212kB, Pdf document) - [Download](#)