

Lebus® Load Binders

Load Rated



SEE APPLICATION AND WARNING INFORMATION


Para Español: www.thecrosbygroup.com

On Page 264

L-140



- Upgraded for use with Grades 70, 80 and 100 Chain.
- Utilizes standard Crosby A-323 Alloy Eye Grab Hooks.
- New design “one piece” forged handle.
- Continuous take-up feature provides finite adjustment to tie down load.
- One piece assembly, no bolts or nuts to loosen.
- Ratchet spring is rust proofed.
- All load bearing or holding parts forged.
- Easy operating positive ratchet.
- Binders shown with Proof Loads have been individually proof tested to values shown, prior to shipment.

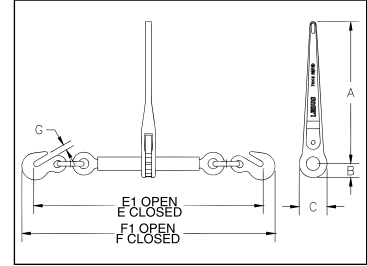

L-140 Standard Ratchet Type Load Binders

- Meets or exceeds requirements of US DOT FMCSA Part 393 Subpart I.

| Model | Stock No. | Min-Max Chain Size (mm) | Working Load Limit (t)* | Proof Load (kN) | Weight Each (kg) | Handle Length (mm) | Barrel Length (mm) | Take Up (mm) | Dimensions (mm) | | | | | | | |
|---------|-----------|-------------------------|-------------------------|-----------------|------------------|--------------------|--------------------|--------------|-----------------|------|------|-----|-----|-----|-----|------|
| | | | | | | | | | A | B | C | E | E1 | F | F1 | G |
| R-7 ** | 1048404 | 8 - 10 | 4.00 | 79 | 5.49 | 356 | 254 | 203 | 356 | 35.1 | 70.0 | 583 | 786 | 638 | 842 | 12.7 |
| R-A ** | 1048422 | 10 - 13 | 6.80 | 134 | 6.66 | 356 | 254 | 203 | 356 | 35.1 | 70.0 | 641 | 845 | 702 | 905 | 16.0 |
| R-C *** | 1048440 | 13 - 16 | 7.26 | 143 | 6.60 | 356 | 254 | 203 | 356 | 35.1 | 70.0 | 670 | 873 | 748 | 951 | 18.3 |

* Ultimate Load is 3 times the Working Load Limit.


** Matches the Working Load Limit of Grade 100 chain for both sizes.

*** Matches the Working Load Limit of Grade 100 chain for 1/2" size.

R-7QL



- For use with Grade 7 Transport Chain.
- Utilizes standard Crosby A-323 Alloy Eye Grab Hooks.
- New design “one piece” forged handle.
- Continuous take-up feature, infinite adjustment, gets the last half of chain.
- One piece assembly, no bolts or nuts to loosen.
- Ratchet spring is rust proofed.
- All load bearings or holding parts forged.
- Easy operating positive ratchet.
- Binders shown with Proof Loads have been individually proof tested to values shown, prior to shipment.

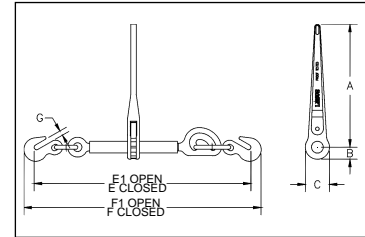

R-7QL QUIC-LINK Ratchet Load Binder

| Model | Stock No. | Min-Max Chain Size (mm) | Working Load Limit (t)* | Proof Load (kN) | Weight Each (kg) | Handle Length (mm) | Barrel Length (mm) | Take Up (mm) | Dimensions (mm) | | | | | | | |
|-------|-----------|-------------------------|-------------------------|-----------------|------------------|--------------------|--------------------|--------------|-----------------|------|------|-----|-----|-----|-----|------|
| | | | | | | | | | A | B | C | E | E1 | F | F1 | G |
| R-7QL | 1048413 | 8 - 10 | 3.00 | 59 | 5.56 | 356 | 254 | 203 | 356 | 35.1 | 70.0 | 630 | 833 | 686 | 889 | 12.7 |

* Ultimate Load is 3 times the Working Load Limit.