


Balfit® 23 Series - Code 61 - 45° Flange Two Piece - Non Skive - Stems



BALFLEX - THE BEST NAME YOU CAN GET IN HOSE

Balfit® 45° Swept SAE 3000 PSI (Code 61) Flange - 23.7043

solid-piece, carbon steel light (code 61) 45 swept flanged fitting for crimping on high pressure hydraulic hoses

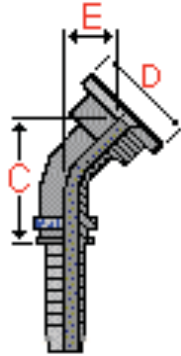

According to **ISO 6162** and **ISO 12151-3** According to **SAE J516** and **SAE J518**

Material: Carbon Steel, Trivalent Zink Plated - Rohs Compliant

Ferrules: Balfit Ferrule Series - 20.100, 20.101, 20.107, 20.200, 20.201, 20.202, 20.301, 20.302, 20.305

Hoses: Balflex Balflex Forza Uno - SAE 100R1AT/DIN EN 853 2SN

Balflex Forza Due - SAE 100R2AT/DIN EN 853 2SN

Balflex Balpac Premium - SAE 100R16/ DIN EN 853 2SC. Balpac 3000 - SAE 100R17/ DIN EN 853 1SC

Balflex textile braid hydraulic hose - SAE 100R3, SAE 100R6, DIN EN 854 1TE / 2TE / 3TE

Balflex thermoplastic hydraulic hoses - SAE100R7, SAE100R8 / DIN EN 855

Balflex PTFE stainless braid - 100R14

Balflex 2-MAX JACK / 3 MAX JACK

Balflex Balmaster - SAE 100R12 / DIN EN 856 4SP - on 1 1/4", 1 1/2" & 2"

part number	hose dash	hose Ø	Flange size	flange dash	D Ø Flange	C Cut Off	E
		inch	inch		mm	mm	mm
23-0808-PA45	- 8	1/2"	1/2"	- 8	30,2	62	22
23-0812-PA45	- 8	1/2"	3/4"	- 12	38,1	68	25
23-1010-PA45 (a)	- 10	5/8"	5/8"	- 10	34,0	68	24
23-1012-PA45	- 10	5/8"	3/4"	- 12	38,1	68	24
23-1212-PA45	- 12	3/4"	3/4"	- 12	38,1	68	24
23-1216-PA45	- 12	3/4"	1"	- 16	44,5	88	30
23-1616-PA45	- 16	1"	1"	- 16	44,5	104	33
23-1620-PA45	- 16	1"	1.1/4"	- 20	50,8	108	37
23-2020-PA45	- 20	1.1/4"	1.1/4"	- 20	50,8	125	38
23-2024-PA45	- 20	1.1/4"	1.1/2"	- 24	60,3	129	39
23-2424-PA45	- 24	1.1/2"	1.1/2"	- 24	60,3	146	50
23-2432-PA45	- 24	1.1/2"	2"	- 32	71,4	176	58
23-3232-PA45	- 32	2"	2"	- 32	71,4	176	58

(a) Japanese flange, size according to **JIS** standards; not included in **SAE J518**

also available:

Balfit® Stainless Steel 45° Swept SAE 3000 PSI (code 61) Flange

(add an 'S' at the end of the part number; ex: 23.7043.1212 S)

Construction characteristics and dimensions may be changed at anytime without prior notice

The data contained herein is for information purposes only and does not enlarge, amend or imply any warranty other than provided by the manufacturer with the product.

Any use of the product not in conformance with the manufacturer's instruction may be dangerous

Only items in this catalog are carried in stock. Some items are subject to minimum quantities or sold in multiples of standard quantities. Please refer to the price list or contact our commercial department. Prices subject to change without notice.