



Midas® Gas Detector



Features:

- Over 35 gases available with extended 2 year warranty*
- Smart sensor cartridge with on board 'e-calibration' certificate
- 3 built in relays (Form C) for Alarm 1, 2 and Fault
- Power over Ethernet (PoE) communication
- Keypad interface and remote web browser interface
- Optional Midas Pyrolyzer module that connects to any Midas Gas Detector
- Password protected menu levels to preserve system integrity
- Bright LEDs and intuitive icon driven, large multicolor backlit LCD display
- Factory-calibrated sensors to reduce need for frequent gas testing
- Isolated 0-22 mA analog output with fault and event reporting
- Modbus/TCP Ethernet for easy connectivity to all control and alarm systems ports for control connectivity and service interaction
- Robust extractive pump system (2 year lifetime) sampling up to 100 feet
- CE marked for total immunity to Radio Frequency Interference
- Reflex® sensor health check for improved safety
- TempuraSure™ temperature compensation technology as appropriate
- Event logging to review sensor history

* Standard 1 year warranty

Choose the Midas Gas Detector to detect more than 35 gases — easily, quickly and error-free. All with extended sensor calibration periods, patented diagnostics and lower cost of ownership.

The Midas Gas Detector uses reliable sensor technology to detect many key toxic, ambient and flammable gases in a plant. The device monitors points up to 100 feet (30 meters) away while using patented technology to regulate flow rates and ensure error-free gas detection. Thanks to Honeywell's use of advanced robotics, the Midas Gas Detector offers unbeatable quality and reliability:

- **Improved visibility and ease of use.** The Midas Gas Detector is equipped with bright LED lights and an intuitive, interactive interface that provides instant alerts to gas readings or alarm levels. The interface also includes password-protected menus for configuration, test and calibration.
- **Easy installation.** Compact in size with an easy-to-handle metal chassis, the Midas Gas Detector is simple to install. That's especially important in crowded, complex process environments where space is at a premium.
- **A complete solution.** The Midas Gas Detector is complemented by our innovative Chemcassette® technology, which detects ultrasensitive toxic gases at low parts-per-billion (ppb) levels. And we offer the support of a worldwide network of service engineers who operate on a 24/7 basis.
- **Numerous applications.** With feature-rich capabilities that are easy to use, the Midas Gas Detector is suitable for many industry applications, including semiconductor processing, light industrial manufacturing, university laboratories, aerospace, wastewater and more.



Contact Honeywell Analytics today.


Find out how our Systems Integration team can save you money, while enhancing safety and productivity at your company.

Please call 800-538-0363 to discuss your specific operational needs.

Compact size is perfect for gas detection in crowded and complex process environments



Single Point Extractive Gas Detector

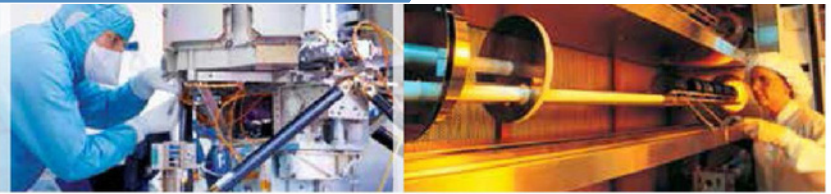

Plug-and-play gas detection

With flexible features and options, the Midas Gas Detector works right out of the box and configures easily to meet your needs. Each plug-and-play sensor cartridge is pre-calibrated, so it's ready when you are. That means longer sensor life, quick and easy replacement, and no operator error due to incorrect or depleted sensors.

The standard power supply and communications capabilities include three onboard relays, 0-22 mA analog output and Modbus/TCP Ethernet digital outputs. Plus, the Midas Gas Detector includes the innovative Power over Ethernet (PoE) protocol — a single Ethernet connection for all power, control and communication requirements. Thanks to the Midas architecture, cost-effective integration with PLC and Fieldbus systems is greatly simplified.

Midas Cartridge Detectable Gases

Gas Name	Chemical Formula
Ammonia	NH ₃
Arsine	AsH ₃
Boron Trichloride	BCl ₃
Boron Trifluoride	BF ₃
Bromine	Br ₂
Carbon Dioxide	CO ₂
Carbon Monoxide	CO
Chlorine	Cl ₂
Chlorine Dioxide	ClO ₂
Diborane	B ₂ H ₆
Dichlorosilane	H ₂ SiCl ₂
Diffuoromethane*	CH ₂ F ₂
Disilane	Si ₂ H ₆
Fluorine	F ₂
Germane	GeH ₄
Hexafluorobutadiene*	C ₄ F ₆
Hydrogen (% LEL)	H ₂
Hydrogen (ppm)	H ₂
Hydrogen Bromide	HBr
Hydrogen Chloride	HCl
Hydrogen Cyanide	HCN
Hydrogen Fluoride	HF
Hydrogen Sulfide	H ₂ S
Methane (% LEL)	CH ₄
Methyl Fluoride*	CH ₃ F
Nitric Oxide	NO
Nitrogen Dioxide	NO ₂
Nitrogen Trifluoride*	NF ₃
Octafluorocyclopentene*	C ₅ F ₈
Oxygen	O ₂
Ozone	O ₃
Phosphine	PH ₃
Silane	SiH ₄
Sulfur Dioxide	SO ₂
Tetra Ethyl Ortho Silicate	TEOS
Tungsten Hexafluoride	WF ₆

*Gases require Midas Pyrolyzer

Midas® Pyrolyzer

Offered as an option, the Midas Pyrolyzer allows for the detection of NF₃ and other Cx_nF_y gases. Cost of ownership is low, as the Pyrolyzer has a replaceable heater assembly with a lifespan of greater than two years. Even more, thanks to our new proprietary catalyst to improve efficiency in gas conversion, the Pyrolyzer delivers automatic flow control, temperature control, and fast and accurate performance. Additionally, the Pyrolyzer can run from a Midas Gas Detector that's powered by either PoE or 24 VDC.



Midas Gas Detector with Midas Pyrolyzer



Midas Gas Detector plug-and-play sensor cartridge allows quick and easy sensor replacement