

运行式
钢丝绳
电动葫芦

AKS-SN2T9



AKS-SN1T9, AKS-SN1T15
AKS-SN2T9, AKS-SN2T15

MONO-RAIL WIRE ROPE HOIST
(STANDARD HEADROOM)
MADE IN CHINA 中國制造

SPECIFICATION	SN1T9	SN1T15	SN2T9	SN2T15
STANDARD CAPACITY	1000 kg		2000 kg	
HOISTING HEIGHT	9 meter	15 meter	9 meter	15 meter
CLASSIFICATION	FEM 1AM		FEM 1AM	
POWER SUPPLY	380V-50Hz-3PH		380V-50Hz-3PH	
HOISTING SPEED	8.4 m/min		7.2 m/min	
HOISTING POWER	1.5 kw		3 kw	
TRAVELING	0.37 kw		0.37 kw	
TROLLEY SPEED	20 m/min		20 m/min	
ROPE REEVING	2/1		2/1	
CONTROL PENDANT	48V		48V	
SUITABLE FOR RAIL	180 - 420 mm		180 - 420 mm	
WEIGHT	230 kg	282 kg	293 kg	360 kg

运行式
钢丝绳
电动葫芦



AKS-SN3T9
AKS-SN3T15

MONO-RAIL WIRE ROPE HOIST
(STANDARD HEADROOM)
MADE IN CHINA 中國制造

SPECIFICATION	AKS-SN3T9	AKS-SN3T15
STANDARD CAPACITY	3000 kg	3000 kg
HOISTING HEIGHT	9 meter	15 meter
CLASSIFICATION	FEM 1AM	FEM 1AM
POWER SUPPLY	380V-50Hz-3PH	380V-50Hz-3PH
HOISTING SPEED	3.6 m/min	3.6 m/min
HOISTING POWER	3 kw	3 kw
TRAVELING	0.37 kw	0.37 kw
TROLLEY SPEED	20 m/min	20 m/min
ROPE REEVING	4/1	4/1
CONTROL PENDANT	48V	48V
SUITABLE FOR RAIL	180 - 420 mm	180 - 420 mm
WEIGHT	391 kg	439 kg

Gambar dan Spesifikasi Mesin tidak semua 100% sesuai

www.aksjakarta.com

运行式
钢丝绳电
动葫芦



AKS-SN5T9, AKS-SN5T15
MONO-RAIL WIRE ROPE HOIST
(STANDARD HEADROOM)
MADE IN CHINA 中國制造

SPECIFICATION	AKS-SN5T9	AKS-SN5T15
STANDARD CAPACITY	5000 kg	5000 kg
HOISTING HEIGHT	9 meter	15 meter
CLASSIFICATION	FEM 1AM	FEM 1AM
POWER SUPPLY	380V-50Hz-3PH	380V-50Hz-3PH
HOISTING SPEED	3.5 m/min	3.5 m/min
HOISTING POWER	4.5 kw	4.5 kw
TRAVELING	0.37 kw	0.37 kw
TROLLEY SPEED	20 m/min	20 m/min
ROPE REEVING	4/1	4/1
CONTROL PENDANT	48V	48V
SUITABLE FOR RAIL	180 - 420 mm	180 - 420 mm
WEIGHT	538 kg	605 kg

运行式
钢丝绳电
动葫芦




**AKS-SN10T9
AKS-SN10T15**
MONO-RAIL WIRE ROPE HOIST
(STANDARD HEADROOM)
MADE IN CHINA 中國制造

SPECIFICATION	AKS-SN10T9	AKS-SN10T15
STANDARD CAPACITY	10000 kg	10000 kg
HOISTING HEIGHT	9 meter	15 meter
CLASSIFICATION	FEM 1AM	FEM 1AM
POWER SUPPLY	380V-50Hz-3PH	380V-50Hz-3PH
HOISTING SPEED	3.8 m/min	3.8 m/min
HOISTING POWER	7.5 kw	7.5 kw
TRAVELING	0.37 kw	0.37 kw
TROLLEY SPEED	20 m/min	20 m/min
ROPE REEVING	4/1	4/1
CONTROL PENDANT	48V	48V
SUITABLE FOR RAIL	180 - 450 mm	180 - 450 mm
WEIGHT	835 kg	835 kg

Gambar dan Spesifikasi Mesin tidak semua 100% sesuai

www.aksjakarta.com

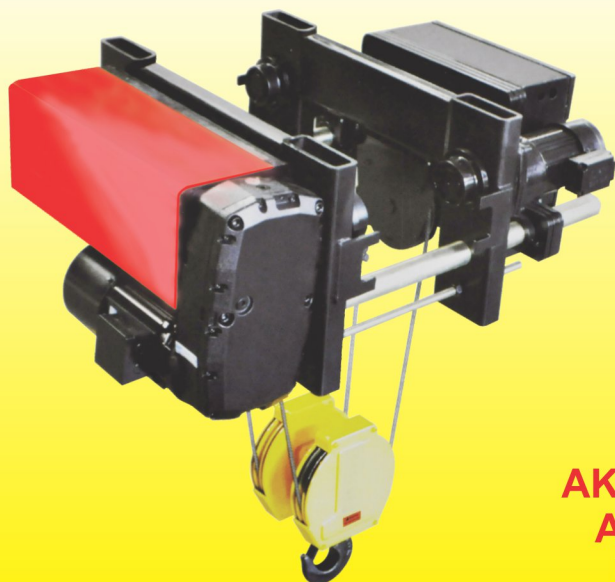

低建筑钢丝绳电动葫芦

AKS-SN3.2TDM9, AKS-SN3.2TDM15
AKS-SN5TDM9, AKS-SN5TDM15

LOW HEADROOM WIRE ROPE HOIST
 MADE IN CHINA 中國制造

SPECIFICATION	AKS - SN3.2TDM9	AKS-SN3.2TDM15	AKS - SN5TDM9	AKS-SN5TDM15
STANDARD CAPACITY	3200 kg	3200 kg	5000 kg	5000 kg
HOISTING HEIGHT	9 meter	15 meter	9 meter	15 meter
CLASSIFICATION	FEM 2AM	FEM 2AM	FEM 2AM	FEM 2AM
POWER SUPPLY	380V - 50Hz - 3PH	380V - 50Hz - 3PH	380V - 50Hz - 3PH	380V - 50Hz - 3PH
HOISTING SPEED	4 / 1 m/min	4 / 1 m/min	4.1 m/min	4.1 m/min
HOISTING POWER	2.5 kw	2.5 kw	4.9 kw	4.9 kw
TRAVELING	0.37 kw	0.37 kw	0.8 kw	0.8 kw
TROLLEY SPEED	20 m/min	20 m/min	20 m/min	20 m/min
ROPE REEVING	4 / 1	4 / 1	4 / 1	4 / 1
CONTROL PENDANT	48V	48V	48V	48V
SUITABLE FOR RAIL	180 - 400 mm	180 - 400 mm	180 - 460 mm	180 - 460 mm
WEIGHT	530 kg	498 kg	875 kg	723 kg

Gambar dan Spesifikasi Mesin tidak semua 100% sesuai

www.aksjakarta.com