



PCS-P100

PORTABLE PNEUMATIC PRESSURE CALIBRATOR

PCS-P100 is Portable pressure calibrator for Pneumatic pressure calibration up to 10 MPa with pressure generation and precise control. An independent pressure calibration system combining electrical signal measuring and loop power to quickly and easily calibrate for a large amount of on-site calibration.

Using Dual-Stage lever type hand pump to generate up to 10 MPa and quickly and easily, and then use the built-in volume controller to precisely adjust the pressure with the secondary fine pressure control.

PCS-P100 also has Pressure/vacuum switching valve to generate up to -97 kPa in vacuum mode which has the best degree of a vacuum in its class.

Full-graphic touchscreen display with intuitive menu selection makes it high visibility and operability.

Upper side of PCS-P100 can equipped quick connectors and adaptors for quick and easy to connect UUT.

- Dual-Stage lever type hand pump to generate and control up to 10 MPa
- Dual-Stage lever type hand pump to generate and control up to -97 kPa for vacuum
- 0.025% F.S Accuracy
- Electrical connection for Transmitter
 - Measure up to ± 15 V, ± 24 mA
 - Source up to 24 VDC
 - Loop Power
- Pressure switch test, Help functions
- Included carrying case
- Available to apply pressure quick fittings (Optional)

01 Use


- Portable pressure calibration
- Simple calibration for common calibration lab
- Calibrate pressure gauge for pressure measuring instruments retail business
- Pressure generating and controlling for pressure test lab
- Pressure calibration for laboratory
- Pneumatic high pressure calibration
- Easy & quick calibration for pressure transmitter, analog pressure gauge, digital pressure gauge, pressure switch test




02 Easy calibration task settings (Touch Screen)




Main Screen

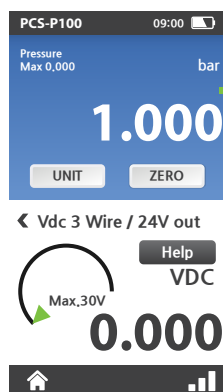

Pressure/Electrical
Measurement Screen

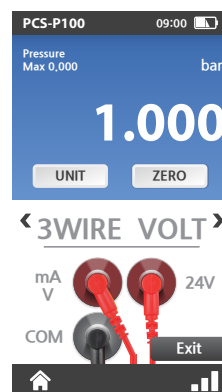


Help Screen
Application connection
diagram display function

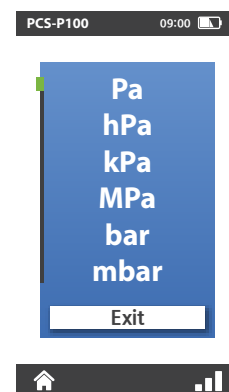

Pressure Units Selection
Available to select
13ea of pressure units

03 TASK menu (Advanced features)

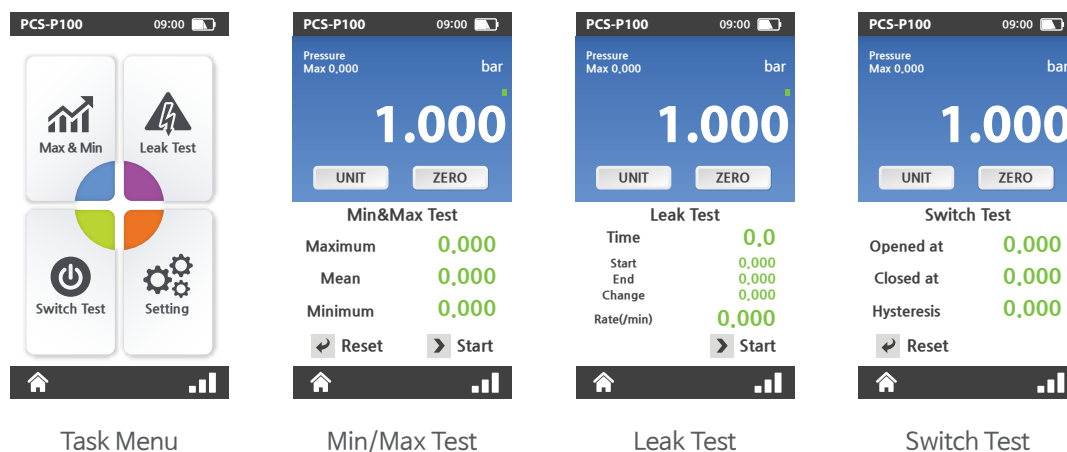

04 General Specifications

Pressure range	-0.097 to 10 MPa
Accuracy	± 0.025% F.S
Electronic measurement and source	± 15 V.dc, ± 24 mA.dc, Accuracy ± (0.01% of Reading + 1digit), Loop Power
Display	Full color touch screen LCD, 110 mm(4.3inch) diagonal. 480 x 272 pixels.
Power	Lithium-ion rechargeable battery, Charger 9V, 6A (5 hrs charge, 12 hrs battery life)
Workable Temperature Range	-20 to 70 °C
Storage Temperature Range	-30 to 80 °C
Temperature Compensated Range	-10 to 50 °C
Pressure units	Pa, hPa, kPa, MPa, bar, mbar, kg/cm ² , psi, mmH ₂ O, cmH ₂ O, inH ₂ O, mmHg, inHg
Test Port	1/8" PF Female
Weight	4.1 kg including batteries
Size	210 mm(W) × 360 mm(D) × 110 mm(H)

05 Ordering Information

PCS-P100 / Model(PCS-P100_Range) / Description(Portable Pneumatic Pressure Calibrator)

- 200 kPa
- 350 kPa
- 700 kPa
- 2 MPa
- 3.5 MPa
- 7 MPa
- 10 MPa

- 97 kPa to 200 kPa
- 97 kPa to 350 kPa
- 97 kPa to 700 kPa
- 97 kPa to 2 MPa
- 97 kPa to 3.5 MPa
- 97 kPa to 7 MPa
- 97 kPa to 10 MPa

06 Accessories



Carrying case



Rechargeable battery



Battery charger



Test lead set

07 Optional items



Dirt / Moisture Trap
Up to 10 MPa



Pneumatic Quick-connection
adaptor set
CA-P Series
(1/4, 3/8, 1/2 PT | PF, NPT)



Flexible tubes
FTH Series
(30 cm to 300 cm)



Traceable calibration report
with data (KOLAS)
pressure



CV KALINDRA MITRA NIAGA

Phone : 021-5541468
HP : 0816-110-5088
Email : suhadi@kalindramini.com
Website : www.kalindramini.com
www.kalindramitra.com

PDK

