


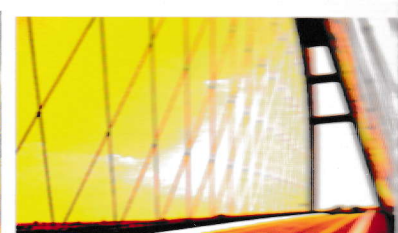


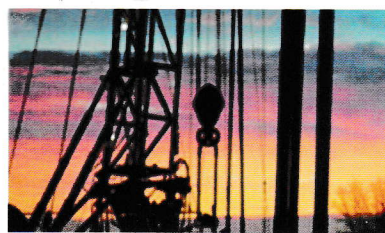

6x19 + FC

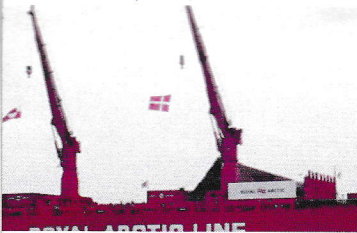

PT. PALITOTTA

WIRE AND WIRE PRODUCTS

IND STRAND

Technology from Italy

Diameter of Rope (mm)	Minimum Breaking Load						Approx Weight per Meter
	A & BG (165kg/mm ²)		B & CG (180kg/mm ²)		C(200kg/mm ²)		
	kN	Tonnef	kN	Tonnef	kN	Tonnef	kg / m
8.0	34.5	3.5	36.8	3.8	40.8	4.2	0.233
9.0	43.7	4.5	46.5	4.7	51.7	5.3	0.295
9.5	48.8	5.0	51.8	5.3	57.6	5.9	0.328
10.0	53.9	5.5	57.5	5.9	63.7	6.5	0.364
11.2	67.7	6.9	72.1	7.4	79.9	8.2	0.457
12.0	77.6	7.9	82.8	8.4	91.7	9.4	0.524
12.5	84.2	8.6	89.7	9.2	99.5	10.2	0.569
14.0	105.9	10.8	112.8	11.5	125.5	12.8	0.713
16.0	138.3	14.1	147.1	15.0	163.8	16.7	0.932
18.0	174.6	17.8	186.3	19.0	205.9	21.0	1.180
19.1	196.1	20.0	209.9	21.4	232.4	23.7	1.330
20.0	215.7	22.0	229.5	23.4	255.0	26.0	1.460
22.4	270.7	27.6	288.3	29.4	319.7	32.6	1.830
24.0	310.9	31.7	330.5	33.7	367.7	37.5	2.100
25.0	337.3	34.4	358.9	36.6	399.1	40.7	2.280
26.0	364.8	37.2	388.3	39.6	431.5	44.0	2.460
28.0	422.7	43.1	450.1	45.9	499.2	50.9	2.850
30.0	485.4	49.5	516.8	52.7	573.7	58.5	3.280
31.5	535.4	54.6	569.8	58.1	632.5	64.5	3.610
33.5	605.1	61.7	644.3	65.7	714.9	72.9	4.080
35.5	679.6	69.3	723.7	73.8	803.2	81.9	4.590
36.0	699.2	71.3	744.3	75.9	826.7	84.3	4.720
37.5	758.1	77.3	808.1	82.4	896.3	91.4	5.120
38.0	778.6	79.4	829.6	84.6	919.9	93.8	5.260
40.0	863.0	88.0	918.9	93.7	1019.9	104.0	5.820
42.0	951.2	97.0	1010.1	103.0	1118.0	114.0	6.420
42.5	973.8	99.3	1039.5	106.0	1147.4	117.0	6.570
44.0	1039.5	106.0	1108.2	113.0	1225.8	125.0	7.050
45.0	1088.5	111.0	1167.0	119.0	1284.7	131.0	7.370

PALITOTTA

BRITISH STANDARD **DIN**  

WIRE AND WIRE PRODUCTS