





6 x 37 + IWRC

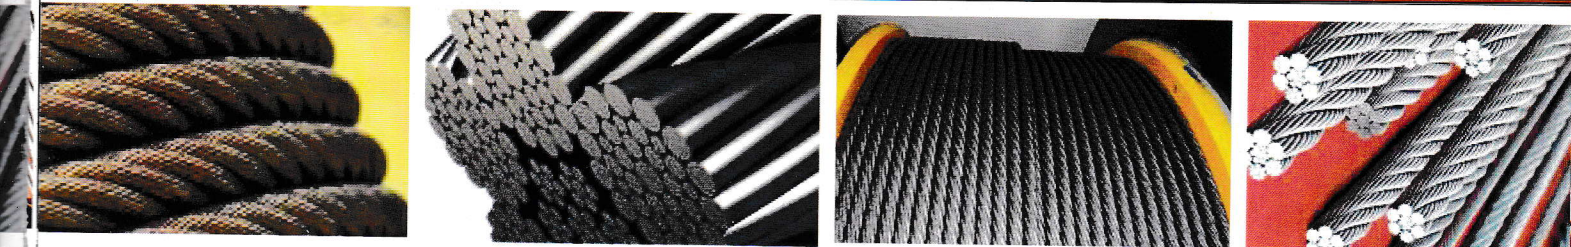

PT. PALITOTTA

WIRE AND WIRE PRODUCTS

IND STRAND

Technology from Italy

Diameter of Rope mm	Minimum Breaking Load						Approx Weight per Meter kg / m
	A & BG (165 kg/mm ²)		B & CG (180 kg/mm ²)		C(200 kg/mm ²)		
	kN	Tonnef	kN	Tonnef	kN	Tonnef	
8.0	38.7	4.0	40.8	4.2	44.0	4.5	0.255
9.0	49.0	5.0	51.6	5.3	55.7	5.7	0.323
9.5	53.5	5.5	57.6	5.9	62.1	6.3	0.358
10.0	59.3	6.1	63.7	6.5	68.8	7.0	0.398
11.2	74.3	7.6	79.9	8.2	86.3	8.8	0.500
12.0	85.5	8.7	91.9	9.4	99.2	10.1	0.573
12.5	92.7	9.5	99.0	10.1	107.0	10.9	0.622
14.0	116.2	11.9	125.0	12.8	135.0	13.8	0.781
16.0	151.5	15.5	162.8	16.6	175.5	17.9	1.000
18.0	191.2	19.5	205.9	21.0	222.6	22.7	1.290
19.1	215.7	22.0	232.4	23.7	251.1	25.6	1.450
20.0	237.3	24.2	255.0	26.0	275.6	28.1	1.600
22.4	298.1	30.4	319.7	32.6	345.2	35.2	2.000
24.0	327.5	33.4	352.1	35.9	380.5	38.8	2.300
25.0	369.7	37.7	397.2	40.5	428.6	43.7	2.500
26.0	402.1	41.0	431.5	44.0	465.8	47.5	2.680
28.0	465.8	47.5	500.1	51.0	540.3	55.1	3.130
30.0	534.5	54.5	573.7	58.5	619.8	63.2	3.580
31.5	588.4	60.0	632.5	64.5	683.5	69.7	3.870
33.5	666.9	68.0	715.9	73.0	772.8	78.8	4.470
35.5	748.2	76.3	804.1	82.0	868.9	88.6	5.020
37.5	833.6	85.0	897.3	91.5	968.9	98.8	5.600
40.0	946.3	96.5	1019.9	104.0	1098.3	112.0	6.400
42.5	1068.9	109.0	1147.4	117.0	1239.8	126.4	7.200
45.0	1.196.4	122.0	1284.7	131.0	1387.6	141.5	8.070

PALITOTTA

BRITISH STANDARD **DIN**  

WIRE AND WIRE PRODUCTS