


EI-MD2000A High Sensitivity Digital Walkthrough Metal Detector

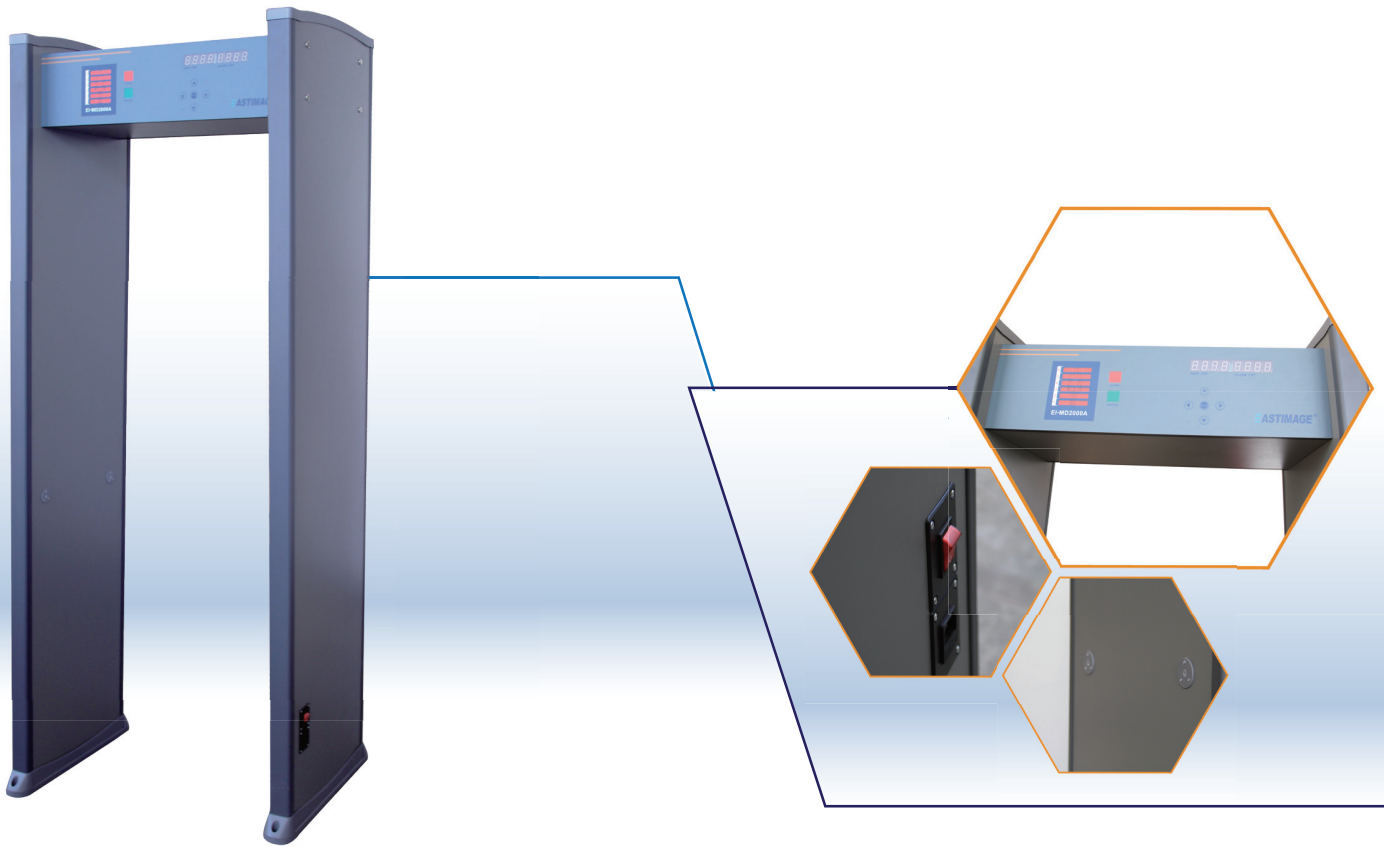

Product Instruction

EI-MD2000A high sensitivity digital walkthrough metal detectors use excellent electromagnetic testing and digital processing technology with high detection sensitivity of the magnetic metal and nonmagnetic metal and good recognition for personal items such as coins, keys, belt buckle, etc. The highest sensitivity can detect a 20 mm diameter steel ball. It has multi-layered overlapping coil design, with high-brightness LEDs to show the horizontal position of metal objects accurately, which can be easy for operator to make judgment.

Technology Features

- ◆ High detection sensitivity for the magnetic metal, non-magnetic metal and alloy.
- ◆ Having digital pulse technology and stable performance.
- ◆ The class of effective sensitivity is 255.
- ◆ Multiple frequency and high anti-interference performance.
- ◆ Modular design and can be easily installed or maintained.

Applications


- ◆ Factories
- ◆ Entertainment venues
- ◆ Large activities
- ◆ Hotel
- ◆ Tourist attractions
- ◆ Public activities

Technology Indicators

- Detecting Area..... 6 detecting area, with high-brightness LED alarm , Precise positioning the location of hiding contraband.
- Sensitivity Level.....255 level adjustable for each detecting area.
- Alarm Setting.....Audible and visual alarm at the same time with 1 to 25 s alarm time and 255 level volume that can be adjusted continuously.
- Display Screen.....High brightness LED display screen shows the passing and alarming number of people.
- Operational Authorization.....Password protection to prevent data from being illegally modified or wrongly operated leading to abnormal work.
- Counting Function.....Intelligent counting function of passenger flow and alarming.
- Diagnostic Function.....Power-on self-test.
- Easy Installation.....Integration design and can be assembled and dismantled in 20 minutes.
- Safety.....No harm to pacemaker wearers, Pregnant woman and magnetic media.

Installation Data

- Size/Weight.....2230mm (L)*830mm (W)*580mm (H)/ about 65KG
- Tunnel Size..... 2000mm (L)*700mm (W)*500mm (H)
- Power Supply.....AC85-264V/50-60HZ
- Power Consumption.....12W
- Working Temperature.....-20℃~+45℃

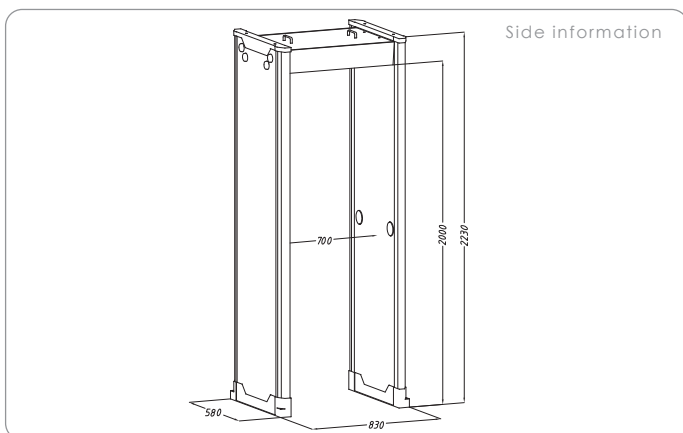

Safety Standard

Comply with the Chinese national standard GB15210-2003.

The copyright belongs to EastImage Equipment Co. Ltd Shanghai, China, Our products have domestic and international patents, must be strictly investigate if any parties copy the design and technology in future



Our company has won QMS "ISO9001: 2008", EMS "ISO 14001:2004", OHSMS "GB/T28001-2011". EI-MD2000A won "EU CE certification"

Notice : Specifications are subject to change without notice.



Shanghai Eastimage Equipment Co., Ltd.

Address: No.111, Zhiye Road, Pudong New District, Shanghai, P.R. China **Post code:** 201299

Tel: +86 21 33909328

E-mail: sales@eastimage.com.cn

Fax: +86 21 58545890

Http: //www.eastimagesecurity.com