




STACKER SEMI ELECTRIC

Dalton®

Cost-effective option for carrying out diverse stacking operations (loading capacity from 1000kg to 2000kg, optional lift height of 1600mm, 2500mm, 3000mm and 3500mm) and the loading and unloading of utility vehicles.



SPECIFICATIONS:

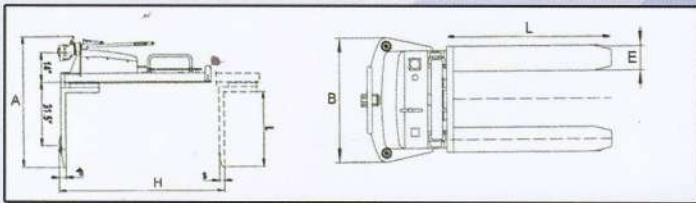

Model No		SPN/DYC 10-20	SPN/DYC 10-25	SPN/DYC 10-30	SPN/DYC 10-35	SPN/DYC 15-20	SPN/DYC 15-25	SPN/DYC 15-30	SPN/DYC 15-35	SPN/DYC 20-20	
Rated Capacity (Q)	kg	1000				1500				2000	
Load Center (C)						400					
Max. Fork Height (H)		2000	2500	3000	3500	2000	2500	3000	3500	2000	
Max. Machine Height		2560	3060	3560	4060	2560	3060	3560	4060	2560	
Fork Length (L)		1000 / 1100									
Fork Width (E)		300 - 850									
Min. Turning Radius		1350		1450			1350		1420		1350
Wheel Base		1185									
Front-Wheel Distance		316									
Lifting Motor	v/kw	12 / 1.5-1.6									
Aneroid Battery	v/Ah	12 / 120-150									
Charger	v/A	12 / 15									
Overall Length (A)		1660									
Overall Width (B)	mm	865		930			865		930		865
Overall Height		1580	1830	2080	2330	1580	1830	2080	2330	1580	
Overall Nett Weight	kg	424	446	468	490	448	470	492	515	460	