



MASTER LEDspot PAR

Master LED PAR30L 32W 30D 857

With its robust design and warm-white beam of light, these new-generation PAR lamps are ideal for general lighting and spot lighting in the hospitality industry. There is a choice of dimmable and non-dimmable versions. They are especially suitable for public areas such as lobbies, corridors, stairwells, where the light is always on.

Product data

| General Information | |
|---------------------------------------|---------------------|
| Cap-Base | E27 [E27] |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 50000X |
| Technical Type | 32-50W |
| Light Technical | |
| Color Code | 857 [CCT of 5700K] |
| Beam Angle (Nom) | 30 ° |
| Luminous Flux (Nom) | 3000 lm |
| Luminous Flux (Rated) (Nom) | 3000 lm |
| Luminous Intensity (Nom) | 9600 cd |
| Color Designation | Daylight |
| Rated Beam Angle | 30 ° |
| Correlated Color Temperature (Nom) | 5700 K |
| Luminous Efficacy (rated) (Nom) | 93.00 lm/W |
| Color Consistency | <6 |
| Color Rendering Index (Nom) | 82 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Operating and Electrical | |
| Input Frequency | 50 to 60 Hz |
| Power (Rated) (Nom) | 32 W |


| Lamp Current (Nom) | 160 mA |
|---------------------------------|-------------------------------|
| Wattage Equivalent | 50 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time to 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.9 |
| Voltage (Nom) | 220-240 V |
| Temperature | |
| T-Case Maximum (Nom) | 79 °C |
| Controls and Dimming | |
| Dimmable | No |
| Approval and Application | |
| Energy Efficiency Label (EEL) | A+ |
| Suitable For Accent Lighting | Yes |
| Energy Consumption kWh/1000 h | 32 kWh |
| Product Data | |
| Full product code | 871869673148200 |
| Order product name | Master LED PAR30L 32W 30D 857 |
| EAN/UPC - Product | 8718696731482 |
| Order code | 929001354908 |

MASTER LEDspot PAR

| | |
|---------------------------------|--------------|
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 6 |
| Material Nr. (12NC) | 929001354908 |

| | |
|--------------------|----------|
| Net Weight (Piece) | 0.410 kg |
|--------------------|----------|


Dimensional drawing

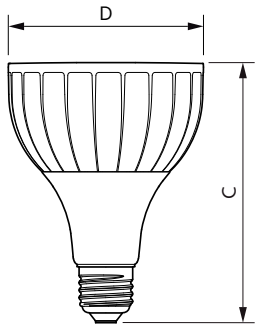


PAR30L 220-240V 32-70W 30D 5700K E27 ND

| Product | D | C |
|-------------------------------|---------|--------|
| Master LED PAR30L 32W 30D 857 | 95.5 mm | 129 mm |


Photometric data



LEDspot PAR30L E27 5700K 30D

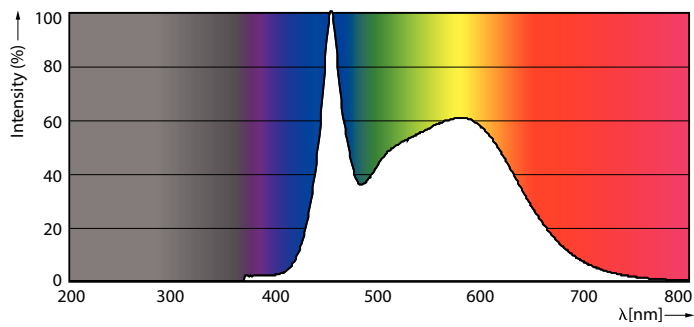


LEDspot PAR30L E27 5700K 30D



LEDspot PAR30L E27 5700K 30D

MASTER LEDspot PAR

Lifetime

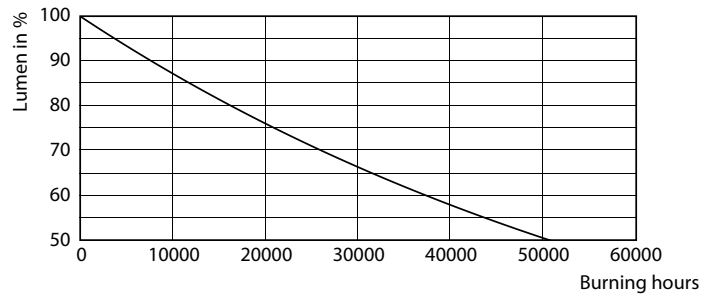

LEDspot MAS 37W E27 PAR30L 830 15D ND

LEDspot MAS 37W E27 PAR30L 830 15D ND

